


Emax EVolution

ULTRA-PRECISION BRUSHLESS MICRO-GRINDER

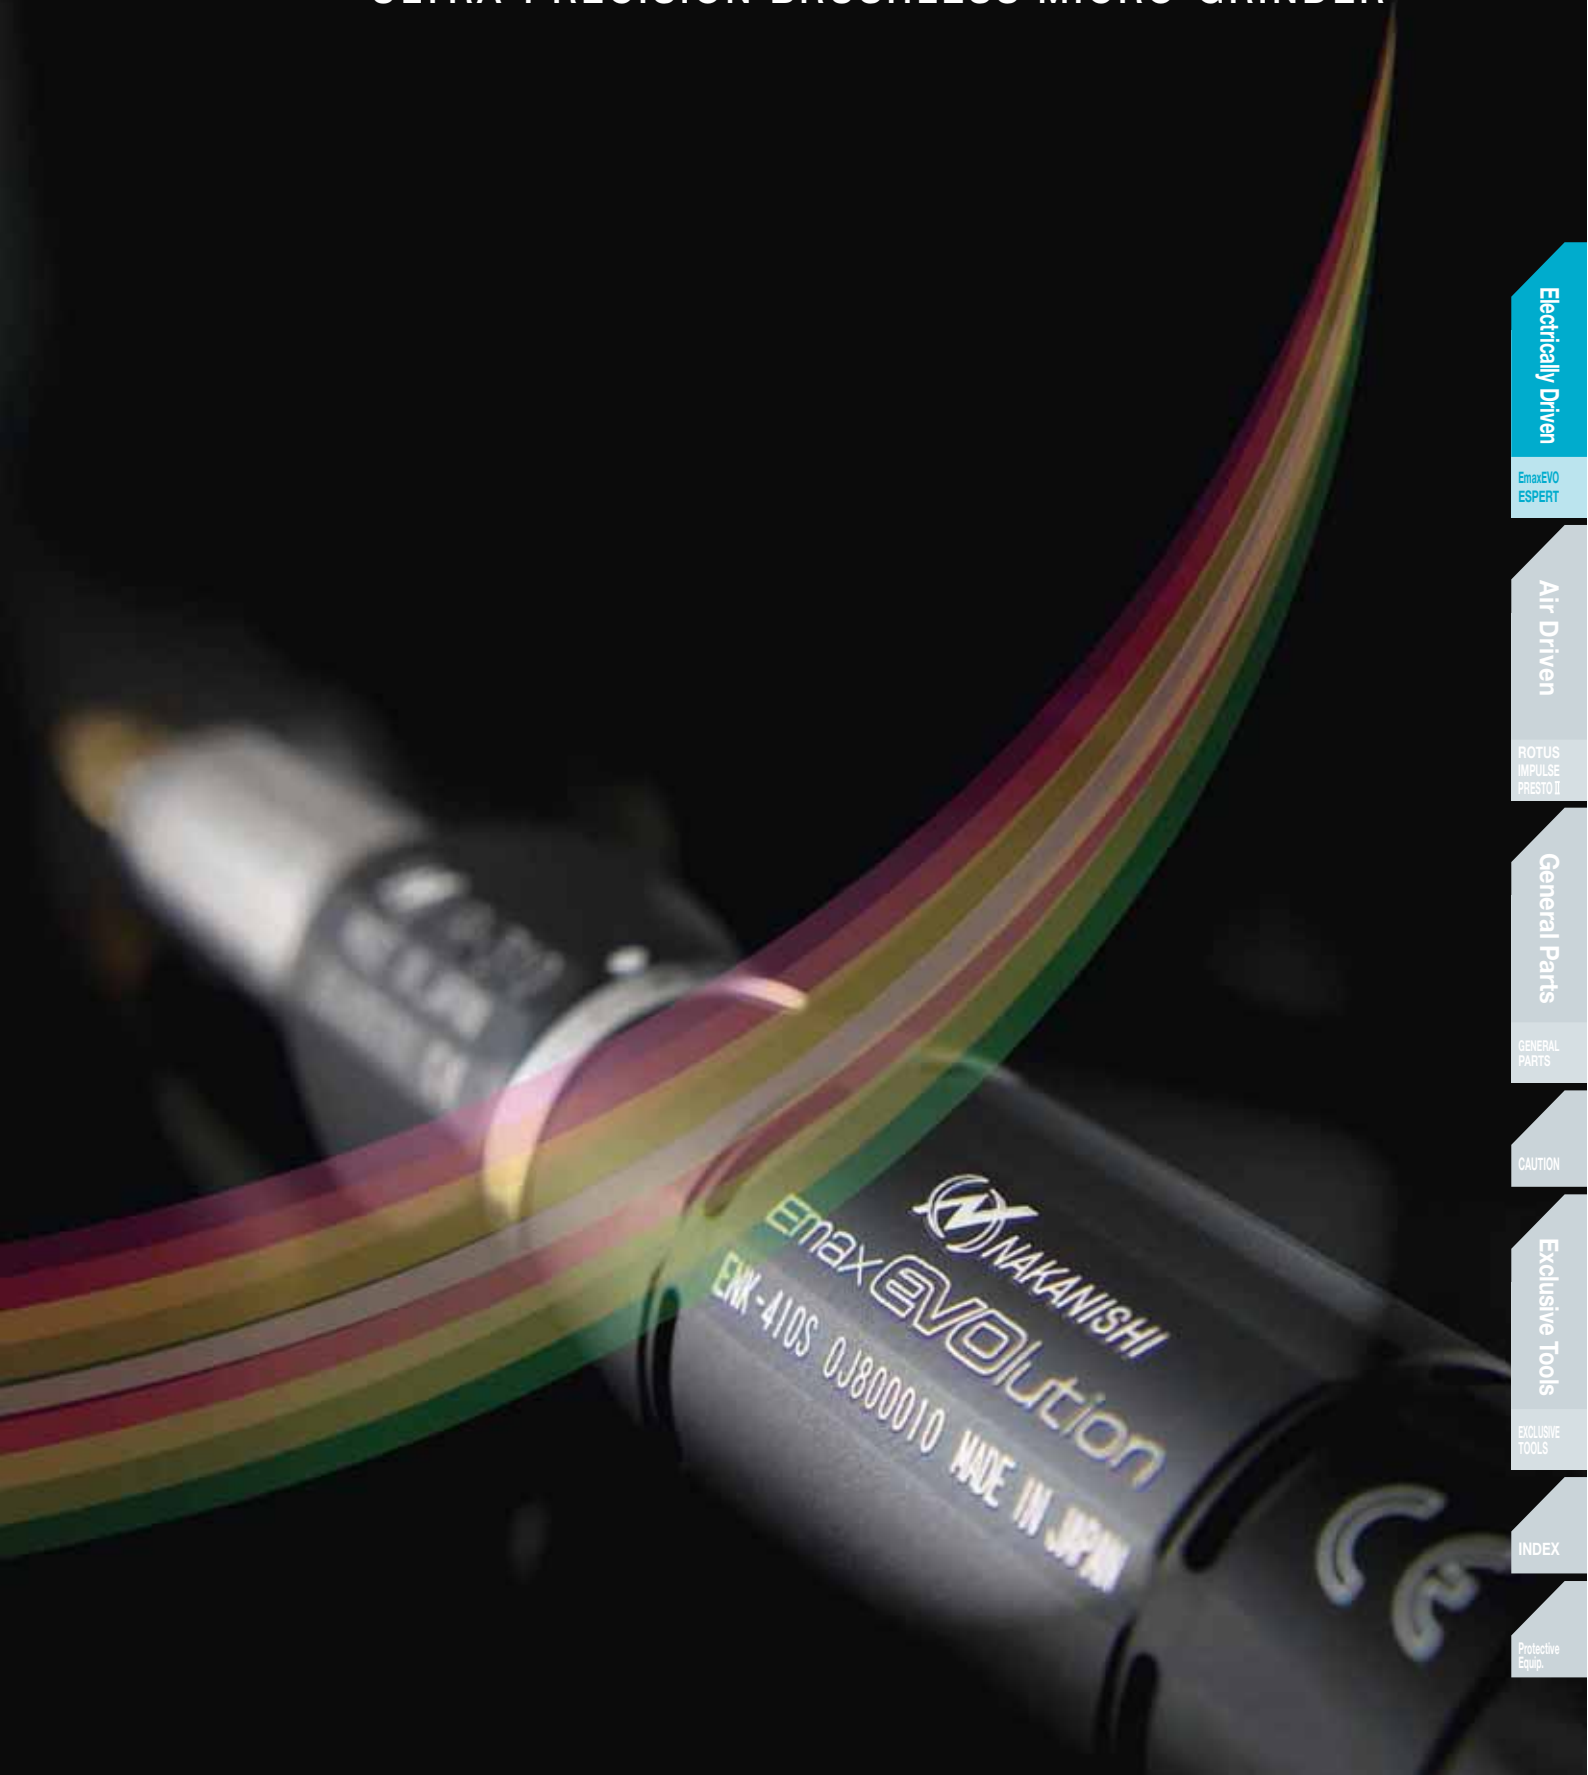

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

ADVANCED HIGH PERFORMANCE BRUSHLESS MICRO-GRINDER

Emax **EVolution** Series

“Tough Torque”

“Flashing Live Load Indicator”

“No need of changing carbon brushes”
(Brushless motor)

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.



1,000~40,000 min⁻¹

Emax **EVolution** Standard Set

Code No.	8233 (120V)	Model	EV410-120
Code No.	8225 (230V)	Model	EV410-230

*Please check the power source plug type (P.58).

Standard Equipment

- Micro Grinder (IR-310+ENK-410S) : 1 pc.
- Collet ø3.0 mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
- Controller (NE249) : 1 pc.
- Accessories : Handpiece Holder : 1 pc., Handpiece Stand : 1 pc.
Power Supply Cord : 1 pc., Spanner (7 x 5.1) : 1 pc.
Pin Spanner (K-233) : 2 pcs., L Shaped Spanner (Ø) : 1 pc.

*Torque set → P.22

Emax **EVOLution** SERIES ◀◀



Electrically Driven
EmaxEVO ESPERT
Air Driven
ROTUS IMPULSE PRESTO II

Application Examples



Tool : Electroplated Diamond Burs
→ Please see the NAKANISHI "POLISHING TOOLS" Catalog.



Tool : Diamond Grinding Discs
→ Please see the NAKANISHI "POLISHING TOOLS" Catalog.



Tool : Flap Wheels
→ Please see the NAKANISHI "POLISHING TOOLS" Catalog.



Tool : Abrasive Belts → P.72



Tool : Sand Paper Disk → P.69



Tool : Felt Bobs
→ Please see the NAKANISHI "POLISHING TOOLS" Catalog.

General Parts
GENERAL PARTS
CAUTION
Exclusive Tools
EXCLUSIVE TOOLS
INDEX
Protective Equip.

ADVANCED HIGH PERFORMANCE CONTROLLER

Emax EVOLution Controller

Advanced Control Function

Upgraded Digital Display. EVOLUTION on Speed Control Volume with Flash Load Indicator.



Motor speed digital display

Load Meter



- :Continuous load area
- :Intermittent load area
- :Overload

Forward / Reverse Select Switch

Forward/Reverse rotation can be selected.

ø12mm Speed Control Volume

Easy to operate by one finger

Motor A

ON/OFF Function

Memory Speed Function FiXspeed®

An exclusive new feature of the Emax EVOLution, the FiXspeed® system allows everyone easily to fix speed of motor A and B independently prior to operate. For example motor A can be set to maintain the speed set by the FiXspeed® system while motor B has variable control using a foot controller. This function brings for unprecedented workability.

Auto Cruise Function

The controller is equipped with an Auto Cruise Function. While using foot controller for work, anyone could fix the motor at any speed by the embedded motor switch. Once speed is set, foot controller is not required. This function eliminates foot fatigue during operation.



Memory Speed Function FiXspeed®

Motor B ON/OFF Function

Emax EVOLution Controller

Code No. **8224** (120V) Model **NE249 120**

Code No. **8227** (230V) Model **NE249 230**

Specifications

Description	Emax EVOLution Controller
Power Source	AC120/230V, 50-60Hz
Dimensions	W130 x D254 x H97 mm
Weight	2.3 kg

Accessories : Handpiece Holder : 1 pc., Handpiece Stand : 1 pc.
Power Supply Cord : 1 pc.

⚠ Never connect to E-max Series motor.

*Please check the power source plug type (P58).

Diversity for work efficiency

2 Motors of A and B can be connected, and select the suited motor for work situation.
(Simultaneous motor operation is not allowable)



Advanced User Friendly Design

New Industrial Design. EVOLUTION from Tower-type solid E-Max to User-oriented Identity. Design meets Performance.



Electrically Driven

EmaxEVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools

EXCLUSIVE TOOLS


INDEX

Protective Equip.


ADVANCED HIGH PERFORMANCE BRUSHLESS MOTOR

Emax **EVOLution** Motor

Excellent Durability



- High performance brushless motor eliminates the need of changing carbon brushes.
- RPM variation is minimal even when load changes. Allowing difficult and stable cutting in stress free motion. Suitable performance for finish grinding.
- Provides superior quietness and smoothness from low speed to high speed.

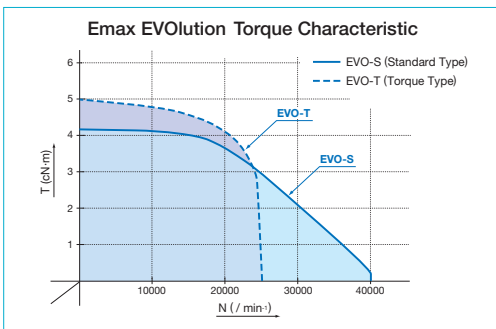

2 Types of Motors

Provides choice of various applications.

NAKANISHI Smart Switch Color

- Standard Type Motor 1,000~40,000 min⁻¹ (ENK-410S) **Blue**
- Torque Type Motor 1,000~25,000 min⁻¹ (ENK-250T) **Green**

***Exclusive use for Emax EVOLution**

NAKANISHI Smart Switch

The switch provides a click sensation. A confirmation tone is reacted by the controller when the switch is operated. The motor type is distinguishable by the switch color.



Standard Type Motor

Code No.	8086
Model	ENK-410S

1,000~40,000 min⁻¹

- Excellent combination of high speed, lightweight, small diameter and high torque. This lightweight and compact general-use type is perfect for precision work.

- ◆ Max. Power : 73W
- ◆ Max. Torque : 4.3 cN·m
- ◆ With Straight Cord : 1.5 m
- ◆ Weight : 90 g (w/o cord)

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

⚠ Never connect to E-max Series controller.



Torque Type Motor

Code No.	8087
Model	ENK-250T

1,000~25,000 min⁻¹

- Combines the best of both high speed and high torque. It is perfect for applications requiring large burs.

- ◆ Max. Power : 76 W
- ◆ Max. Torque : 4.8 cN·m
- ◆ With Straight Cord : 1.5 m
- ◆ Weight : 147 g (w/o cord)

⚠ Never connect to E-max Series controller.



Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

Code No.	Model
----------	-------

Attachment

*Interchangeable with attachments form the E-max and ROTUS system.

1147 IR-310 (P.13)



Ring Type

1005 IH-300 (P.21)



Lever Type

2811 IG-400 (P.21)



Straight Type

1016 HG-200 (P.21)



6 mm Torque Type^{*1}

1017 BMH-300 (P.14)



Long Type

1012 MFC-300S (P.15)



90° Mini Angle Type

1013 MFC-300M (P.15)



90° Mini Angle Type (Very Small Head)

1006 IC-300 (P.16)



90° Angle Type

1014 KC-300 (P.16)



50° Angle Type

LUSTER
1302 LS-100 (P.21)



Pistol-Type Polisher
(Reciprocating motion)

MINI-LUSTER
1307 ML-8 (P.17)



Pencil-Type Reciprocating Polishing Finisher
(Reciprocating motion)

SWING-LUSTER
1380 SLS-16 (P.18)



Pencil-Type Reciprocating Polishing Finisher
(Right to Left motion)

Hammer Action Type
8060 HA-500 (P.21)



Engraving and Ornament Processing
Work Hammer

FINE BELT SANDER
1146 KBS-101 (P.19)



Small-sized Handy Belt Sander



LUSTER
1483 NLS-110 (P.20)

Exclusive use for Emax EVOLution

- Wide selection of attachments available depending on the application.

Speed Reducer·Extension Joint



Extension Joint
1015 CN-01 (P.22)



1/4 Speed Reducer
1009 RG-01 (P.22)



1/15 Speed Reducer
1010 RG-02 (P.22)

- May be connected between the motor and the attachment when required increased torque.

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

⚠ Details of Maximum Allowable speed on intermittent use or continuous use P.13-22

<Caution>

* 1 : Use 6 mm Torque Type HG-200 to connect ENK-250T

Motor

Emax EVOLUTION Series



- Standard Type Motor with Cord (P.10)

8086	ENK-410S	1,000~40,000 min ⁻¹
------	----------	--------------------------------



- Torque Type Motor with Cord (P.10)

8087	ENK-250T	1,000~25,000 min ⁻¹
------	----------	--------------------------------

Exclusive use for Emax EVOLUTION

Controller

- Emax EVOLUTION



8224 (120V)	NE249 120
8227 (230V)	NE249 230

(P.9)

- Foot Controller



8106	FC-64
------	-------

(P.22)

Electrically Driven

Sets



Emax EVOLUTION Standard Set

Code No.	Model
8233 (120V)	EV410-120
8225 (230V)	EV410-230

Standard Equipment

- Micro Grinder (IR-310+ENK-410S) : 1 pc.
- Collet ø3.0 mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
- Controller (NE249) : 1 pc.
- Accessories : Handpiece Holder : 1 pc.
Handpiece Stand : 1 pc.
Power Supply Cord : 1 pc.
Spanner (7 x 5.1) : 1 pc.
Pin Spanner (K-233) : 2 pcs.
L Shaped Spanner (9) : 1 pc.

ROTUS Series



- Air Motor with Hose
360° Twist-Free Joint Mechanism (P.40)

1004	IM-301	3,000~30,000 min ⁻¹
------	--------	--------------------------------

- Air Line Kit



4507	AL-H1207F
------	-----------

(P.44)

- Foot Controller



1064	AFC-45
------	--------

(P.44)

Air Driven

* This air line kit is designed for use with the AFC-45 foot controller, Code No.1064.



ROTUS Standard Set

Code No.	Model
1163	ROTUS-IR

Standard Equipment

- Air Grinder (IR-310+IM-301) : 1 pc.
- Collet ø3.0mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
- Air Line Kit (AL-H1207F) : 1 pc.
- Foot Controller (AFC-45) : 1 pc.
- Accessories : Piping Hose 2m (K-275) : 1 pc.
Lubricating Oil (K-211) : 1 pc.
Spanner (7x5.1) : 1 pc.
Pin Spanner (K-233) : 2 pcs.
L Shaped Spanner (9) : 1 pc.

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

PRECISION MICRO-GRINDER

Ring Type Attachment



Ring Type Chucking System

- One-touch ring type bur replacement.
- High precision and high reliability is realized by micron precision.
- Slim, lightweight design allows for fine finishing of delicate parts.


40,000 min⁻¹ Max.

◆ Weight : 92 g

Standard Size Collet

ø3.0 mm (CHH-3.0) ø2.35 mm (CHH-2.35)

Optional Collets : CHH group are shown in page (P.55)

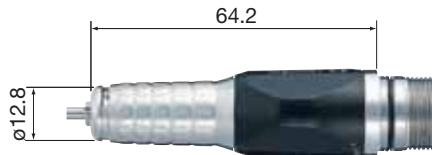


Code No. **1147** Model **IR-310**

Standard Accessories

- Spanner (7x5.1) : 1 pc. • Pin Spanner (K-233) : 1 pc.
- L Shaped Spanner (9) : 1 pc.


Ring Type Attachment + Standard Type Motor Combination Example

1,000~40,000 min⁻¹




Ring Type Attachment + Torque Type Motor Combination Example

1,000~25,000 min⁻¹



Emax EVOLution Controller (P.9)
 <Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.

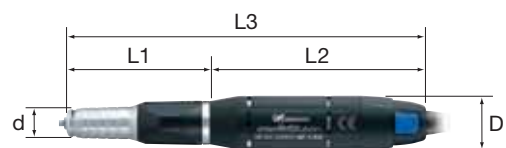

Combination Example	d	D	L1	L2	L3	Weight	Max. Torque	Speed Range	Collet
1147+8086	ø12.8	ø24.5	64.2	97	161.2	182 g (*)	4.3 cN·m	1,000~40,000 min ⁻¹	ø0.3~ø3.175 mm CHH Group (P.55)
1147+8087	ø12.8	ø28.4	64.2	108	172.2	239 g (*)	4.8 cN·m	1,000~25,000 min ⁻¹	ø0.3~ø3.175 mm CHH Group (P.55)

* Weight (w/o Straight Cord)

Electrically Driven

EmaxEVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools

EXCLUSIVE TOOLS

INDEX

Protective Equip.

PRECISION MICRO-GRINDER

Long Type Attachment

 Tip diameter $\phi 13$ mm


- This unique slim body makes it ideal for cutting and grinding the bottom surface of deep ribs or holes.
- Collet is tightened by a spanner.
- The tip diameter of attachment is $\phi 13$ mm.

35,000 min⁻¹ Max.

◆ Weight : 156 g

Standard Size Collet


 $\phi 3.0$ mm (CHM-3.0)

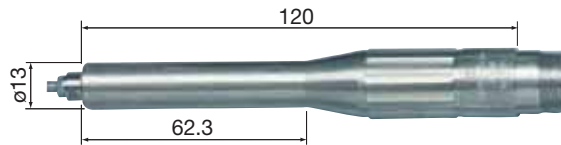 Optional Collets :
 CHM group are shown in page (P.56)



Code No.	1017	Model	BMH-300
----------	-------------	-------	---------

Standard Accessories

- Spanner (7 x 5.1), (6 x 4.5) : 1 pc. each
- Pin Spanner (K-233) : 1 pc.

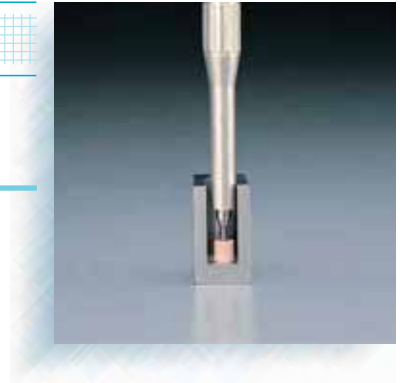

Long Type Attachment + Standard Type Motor Combination Example

1,000~35,000 min⁻¹


Electrically Driven

 EmaxEVO
 ESPERT

Air Driven

 ROTUS
 IMPULSE
 PRESTO II

General Parts

 GENERAL
 PARTS

CAUTION

Exclusive Tools

 EXCLUSIVE
 TOOLS


INDEX

 Protective
 Equip.

Emax EVOLUTION Controller (P.9)

<Code No. : 8224 (120V) · Model : NE249 120>

<Code No. : 8227 (230V) · Model : NE249 230>

 Never connect to
 E-max Series Controller.


Combination Example	Outside Diameter	Weight	Max. Torque	Speed Range	Collet
1017+8086	Refer to the dimensions	246 g (*)	4.3 cN·m	1,000~35,000 min ⁻¹	$\phi 0.3$ ~ $\phi 3.175$ mm CHM Group (P.56)

* Weight (w/o Straight Cord)

ANGLE TYPE GRINDER

Mini Angle Type Attachment



For Chamfering Deep Hole

Bur Only $\phi 1.6$ mm

Exclusive Tools P.71

- Suitable for chamfering and deburring the inside of the slit pipe.
- The world's smallest angle type attachment.
- Various $\phi 1.6$ mm exclusive tools are also available.


15,000 min⁻¹ Max.

- ◆ Minimum Inner Diameter : $\phi 13$ mm
- ◆ Holding tool width : 7.2 mm ◆ Weight : 47 g
- ◆ Speed Reduction Ratio : 10/11

Standard Size Collet Exclusive Tools P.71
 $\phi 1.6$ mm (K-253) P.56

- ◆ Minimum Inner Diameter : $\phi 20$ mm
- ◆ Holding tool width : 11.9 mm ◆ Weight : 50 g
- ◆ Speed Reduction Ratio : 10/11

Standard Size Collet Exclusive Tools P.71
 $\phi 1.6$ mm (K-252) P.56

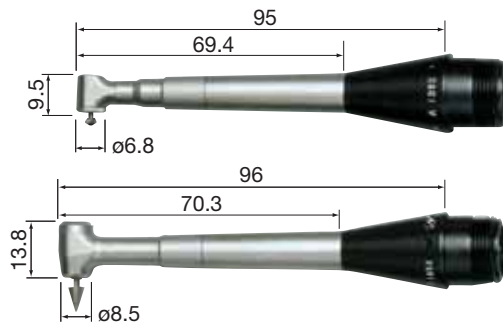

Mini Angle Type (Very Small Head)

Code No. **1013** Model **MFC-300M**

Standard Accessories

- Chuck Wrench (K-232) : 1 pc. • Pin Spanner (K-233) : 1 pc.

Mini Angle Type

Code No. **1012** Model **MFC-300S**


Standard Accessories

- Chuck Wrench (K-232) : 1 pc. • Pin Spanner (K-233) : 1 pc.

Mini Angle Type Attachment + Standard Type Motor Combination Example




1,000~15,000 min⁻¹



Mini Angle Type Attachment + Standard Type Motor Combination Example




1,000~15,000 min⁻¹



Emax EVOLution Controller (P.9)

<Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.

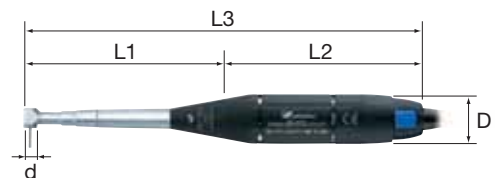

Combination Example	d	D	L1	L2	L3	Weight	Max. Torque	Speed Range	Collet
1013+8086	$\phi 6.8$	$\phi 24.5$	95	97	192	137 g (*)	4.3 cN·m	1,000~15,000 min ⁻¹	$\phi 1.6$ mm (K-253) (P.56)
1012+8086	$\phi 8.5$	$\phi 24.5$	96	97	193	140 g (*)	4.3 cN·m	1,000~15,000 min ⁻¹	$\phi 1.6$ mm (K-252) (P.56)

* Weight (w/o Straight Cord)

TOOL : $\phi 1.6$ mm

Please see the NAKANISHI "POLISHING TOOLS" Catalog.



Electrically Driven

EmaxEVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools

EXCLUSIVE TOOLS

INDEX

Protective Equip.

ANGLE TYPE GRINDER

Angle Type Attachment



Most suitable for polishing flat surfaces at speed

Exclusive Tools P.69-71

- Suitable for polishing a flat surface at speed with a grinding disk pad.
- Perfect for finishing bottom surfaces and other tight, hard to reach areas.

30,000 min⁻¹ Max.

- ◆ Weight : 45 g
- ◆ Speed Reduction Ratio : 3/4

Standard Size Collet

Exclusive Tools P.69-71

ø3.0 mm (CHC-3.0)

Optional Collets : CHC group are shown in page (P.55)


- ◆ Weight : 45 g
- ◆ Speed Reduction Ratio : 3/4
- Use the motor in reverse rotation for clockwise rotation.

Standard Size Collet

Exclusive Tools P.69-71

ø3.0 mm (CHC-3.0)

Optional Collets : CHC group are shown in page (P.55)

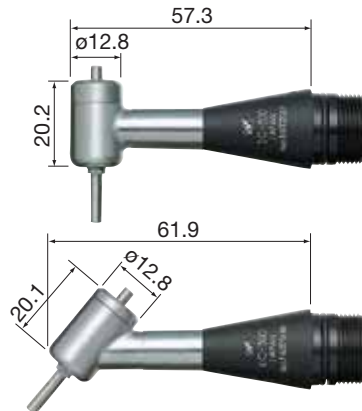
Angle Type (90°)

Code No.	1006	Model	IC-300
----------	-------------	-------	---------------

Standard Accessories

- Chuck Wrench (K-231) : 1 pc. • Pin Spanner (K-233) : 1 pc.
- Standard Accessories : 1 set


Angle Type (50°)

Code No.	1014	Model	KC-300
----------	-------------	-------	---------------

Standard Accessories


- Chuck Wrench (K-231) : 1 pc. • Pin Spanner (K-233) : 1 pc.
- Standard Accessories : 1 set

90° Angle Type Attachment + Standard Type Motor Combination Example

1,000~26,000 min⁻¹

50° Angle Type Attachment + Standard Type Motor Combination Example


1,000~26,000 min⁻¹

Use the motor in reverse rotation for clockwise rotation.


Emax EVolution Controller (P.9)

<Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.

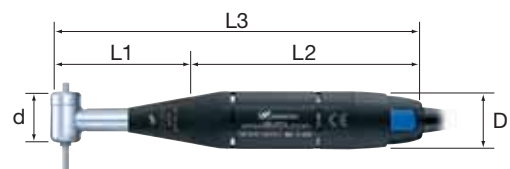

Combination Example	d	D	L1	L2	L3	Weight	Max. Torque	Speed Range	Collet
1006 + 8086	20.2	ø24.5	57.3	97	154.3	135 g (*)	4.3 cN·m	1,000~26,000 min ⁻¹	ø1.0~ø3.175 mm CHC Group (P.55)
1014 + 8086	20.1	ø24.5	61.9	97	158.9	135 g (*)	4.3 cN·m	1,000~26,000 min ⁻¹	

Standard Accessories

Code No.	Description	Package
64101	Rubber Pad (Small) O.D. ø10 mm	1 pc./pack
64102	Rubber Pad (Med) O.D. ø20 mm	
64103	Rubber Pad (Large) O.D. ø30 mm	
64133	Sand Paper Disk for small pad ø11 #180	5 pcs./pack
64137	Sand Paper Disk for small pad ø11 #600	

Code No.	Description	Package
64153	Sand Paper Disk for med. pad ø21 #180	5 pcs./pack
64157	Sand Paper Disk for med. pad ø21 #600	
64173	Sand Paper Disk for large pad ø31 #180	
64177	Sand Paper Disk for large pad ø31 #600	


• Exclusive tools for Angle Type Attachment P.69~71

PENCIL-TYPE RECIPROCATING POLISHING FINISHER

MINI-LUSTER Attachment

Stroke Range 0.8 mm Reciprocating Motion Exclusive Tools P.67-69

- Due to pencil type grip, it is most suitable for polishing narrow grooves, details, etc.
- Lightweight, compact design and minimal vibration keep the hand free from fatigue for long continuous operation.
- By using the grindstone holder provided, various tools such as oil stone, super stone, diamond files, etc. can be used.

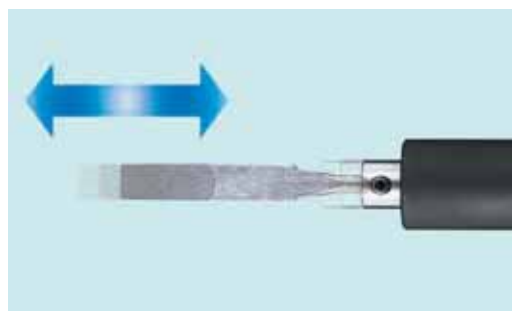

25,000 min⁻¹ Max.
 ◆ Stroke Range (Fixed) : 0.8 mm
 ◆ Reciprocating Stroke (Variable) : 0~6,380 times/min.
 ◆ Weight : 130 g
 ◆ Max. tool shank diameter ø3.2 mm, Screw clamp type

Exclusive Tools P.67-69



Code No.	1307	Model	ML-8	Stroke (0.8 mm)
----------	-------------	-------	-------------	-----------------

Standard Accessories

- Allen Wrench (1.5 mm) : 1 pc.
- Standard Accessories : 1 set

Electrically Driven

EmaxEVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools



EXCLUSIVE TOOLS

INDEX

Protective Equip.


MINI-LUSTER Attachment + Standard Type Motor Combination Example

Reciprocating Stroke
0~6,380 times/min.



Emax EVOLution Controller (P.9)
 <Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.

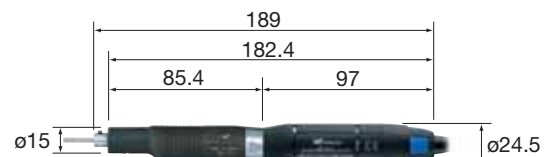

Combination Example	Outside Diameter	Weight	Max. Torque	Reciprocating Stroke	Max. Tool Shank
1307+8086	Refer to the dimensions	220 g (*)	4.3 cN·m	0~6,380 times/min.	ø3.2 mm (screw clamp type)

Standard Accessories

Code No.	Description	Package
62751	Spring Holder	1 pc. each
62510	Ceramic Fiber Grindstone Holder	
62814	Electroplated Diamond File 1.2 x 4 x 50 #100	
60737	Ceramic Fiber Grindstone 1 x 6 x 50 #1200	

• Exclusive tools P.67-69

* Weight (w/o Straight Cord)

PENCIL-TYPE RECIPROCATING POLISHING FINISHER


SWING-LUSTER Attachment

Stroke Range 0~1.6 mm

Right to Left Motion

Exclusive Tools P.67 ~ 69

- High speed grinding and polishing operations can be performed while maintaining the fine and delicate feeling of hand polishing.
- Lightweight pencil type design makes it easy to work in tight areas.
- Ergonomically designed to provide high sensitivity for precision work.
- Easily adjustable stroke length allows efficient work on minute areas of large sections.

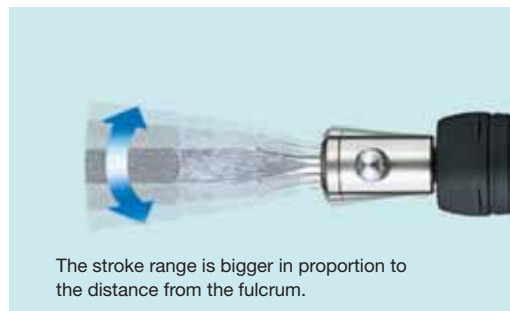

The stroke range is bigger in proportion to the distance from the fulcrum.

30,000 min⁻¹ Max.

- ◆ Reciprocating Stroke (variable) : 0~7,650 times/min.
- ◆ Stroke Range (variable) : 0~1.6 mm
- ◆ Weight : 127 g
- ◆ Max. tool shank diameter ø5.0 mm, Screw clamp type.

Exclusive Tools P.67 ~ 69




Code No.	1380	Model	SLS-16
----------	-------------	-------	---------------

Standard Accessories

- Spanner (16 x 18), (20 x 24) : 1 pc. each
- Allen Wrench (1.5 mm) : 1 pc.
- Standard Accessories : 1 set

SWING-LUSTER Attachment + Standard Type Motor Combination Example

Reciprocating Stroke
0~7,650 times/min.



Emax EVOLution Controller (P.9)
 <Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

Never connect to E-max Series Controller.

Combination Example	Outside Diameter	Weight	Max. Torque	Reciprocating Stroke	Max. Tool Shank
1380 + 8086	Refer to the dimensions	217 g (*)	4.3 cN·m	0~7,650 times/min.	ø5.0 mm (screw clamp type)

Standard Accessories

Code No.	Description	Package
60737	Ceramic Fiber Grindstone 1 x 6 x 50 #1200	1 pc. each
62814	Electroplated Diamond File 1.2 x 4 x 50 #100	
62510	Ceramic Fiber Grindstone Holder	

• Exclusive tools P.67~69

* Weight (w/o Straight Cord)

SMALL-SIZED HANDY BELT SANDER

FINE BELT SANDER Attachment



Exclusive Tools P.72 ~ 73


- Very high belt speed, ideal for applications from deburring to finishing.
- Belt runs Approx. 0~705 m/min.
- Lightweight, compact, minimal vibration and a small diameter grip design keep the hand free from fatigue for long, continuous operation.
- The angle of the belt section is fully adjustable.
- Exchanging the belt is simply done by lever release.
- 4, 6, 8 mm width belts are available.



30,000 min⁻¹ Max.

- ◆ Belt Speed : 0-705 m/min.
- ◆ Weight : 350 g
- ◆ Belt Sizes : 4, 6, 8 mm Wide×300mm long

Exclusive Tools P.72 ~ 73

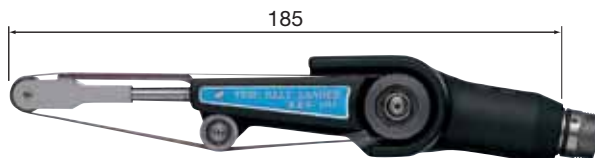


Code No.	1146	Model	KBS-101
----------	-------------	-------	----------------

Standard Accessories
 • Allen Wrench (3 mm) : 1 pc. • Standard Accessories : 1 set

FINE BELT SANDER Attachment + Standard Type Motor Combination Example

0~705 m/min.



Emax EVOLution Controller (P.9)
 <Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.



Combination Example	Outside Diameter	Weight	Max. Torque	Belt Speed	Belt Width
1146 + 8086	Refer to the dimensions	440 g (*)	4.3 cN·m	0~705 m/min.	4 mm, 6 mm, 8 mm

* Weight (w/o Straight Cord)

Standard Accessories

Code No.	Description	Package
64902	Abrasive Belt Width 4mm #120	2 pcs. each
64904	Abrasive Belt Width 4mm #240	
64906	Abrasive Belt Width 4mm #400	
64912	Abrasive Belt Width 6mm #120	
64914	Abrasive Belt Width 6mm #240	
64916	Abrasive Belt Width 6mm #400	
64922	Abrasive Belt Width 8mm #120	
64924	Abrasive Belt Width 8mm #240	
64926	Abrasive Belt Width 8mm #400	

Spare Parts

Product	Description	Code No.	Model
	Tension Pulley	1103	TP-12A
	Tension Pulley Assembly	1104	TPA-12A

PISTOL-TYPE RECIPROCATING POLISHING FINISHER

LUSTER *Emax* EVOLution

With Motor ON/OFF Switch

Reciprocating Motion

 Exclusive Tools ^{P.67} ~ ^{P.69}

- Powerful reciprocating stroke polisher equipped with 1/4 Speed Reducer to multiply the torque by 4 times.
- Reciprocating speed and stroke can be easily and continuously controlled.
- LUSTER NLS has a built-in motor. Insert the cord plug into the controller.


LUSTER *Emax* EVOLution
Reciprocating Stroke
0~6,300 times/min.

Code No.	1483
Model	NLS-110

25,000 min⁻¹ Max.
Specifications

Stroke Range : 0~6 mm (variable)
 Reciprocating Stroke : 0~6,300 times/min. (variable)
 Max. Torque : 17.2 cN·m
 Weight : 800 g (w/o cord)
 With Straight Cord : 1.5 m

Standard Accessories

- Allen Wrench (2 mm), (3 mm) : 1 pc. each
- Lubricating Oil
- Lubrication Nozzle for LUSTER
- Standard Accessories : 1 set

 Exclusive Tools ^{P.67} ~ ^{P.69}


● Stroke Range : 0~6 mm adjustable by allen wrench.




- The grinding surface can be set at any angle between 0 and 360° enabling grinding of bottom, right, left and top surfaces without moving the machine itself.
- Mountable tool : Screw clamp type. Max. Tool Shank ø6.4 mm

● Designed with comfortable rubber-grip. Well balanced, rubber-grip absorbs vibration from reciprocating strokes reducing fatigue and allowing long, continuous operation.

● With Motor ON/OFF Switch


Emax EVOLution Controller (P.9)
 <Code No. : 8224 (120V) · Model : NE249 120>
 <Code No. : 8227 (230V) · Model : NE249 230>

⚠ Never connect to E-max Series Controller.

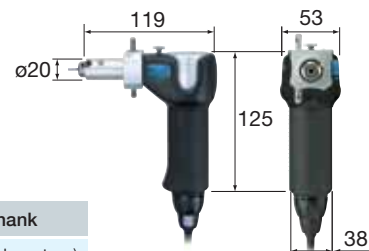

Code No.	Outside Diameter	Weight	Max. Torque	Reciprocating Stroke	Max. Tool Shank
1483	Refer to the dimensions	800 g (*)	17.2 cN·m	0~6,300 times/min.	ø6.4 mm (screw clamp type)

※ Weight (w/o Straight Cord)

Standard Accessories

Code No.	Description	Package	Code No.	Description	Package
62502	Stone Holder	1 pc./pack	62527	Angle Rod	1 pc./pack
62505	Stone Holder		62552	Sand Paper Tip #120	10 pcs./pack
62751	Spring Holder		62555	Sand Paper Tip #320	
62525	Rectangular Pad		62557	Sand Paper Tip #600	
62526	Rod for Rectangular Pad		62559	Sand Paper Tip #1000	

● Exclusive tools for LUSTER P.67~69

Electrically Driven

 EmaxEVO
 ESPERTO

Air Driven

 ROTUS
 IMPULSE
 PRESTO II

General Parts

 GENERAL
 PARTS

CAUTION

Exclusive Tools

 EXCLUSIVE
 TOOLS

INDEX

 Protective
 Equip.

Lever Type Attachment

Code No. **1005** Model **IH-300**



40,000 min⁻¹ Max.

- High precision and high reliability is realized by micron precision.
- Slim, lightweight design allows for fine finishing of delicate parts.
- Lever Type one touch bur release.



◆ Weight : 62 g

Standard Size Collet

ø3.0 mm (CHH-3.0) ø2.35 mm (CHH-2.35)


Optional Collets : CHH group are shown in page (P.55)

Standard Accessories

- Spanner (7x5.1) : 1 pc. • Pin Spanner (K-233) : 1 pc.

6 mm Torque Type Attachment

Code No. **1016** Model **HG-200**

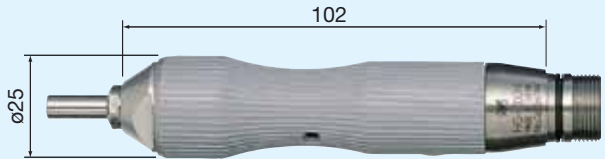

Use ENK-250T to connect HG-200.

30,000 min⁻¹ Max.

- Permits the use of ø6.0 mm shank burs.
- The resistance produced by cutting and grinding is absorbed by a special rubber grip to eliminate slipping.
- Collet is tightened by a spanner.



◆ Weight : 210 g

Standard Size Collet

ø6.0 mm (CHG-6.0)


Optional Collets : CHG group are shown in page (P.55)

Standard Accessories

- Spanner (10 x 10) : 1 pc. • Bar Wrench (K-212) : 1 pc.
- Pin Spanner (K-233) : 1 pc.

Straight Type Attachment

Code No. **2811** Model **IG-400**

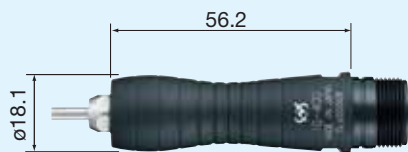

40,000 min⁻¹ Max.

- Lightweight ergonomically designed with minimal vibration for extended use.
- NK Micron Collet permits strong retention and high precision performance.



◆ Weight : 55 g

Standard Size Collet

ø3.0 mm (NKM6-3.0)

Optional Collets : NKM6 group are shown in page (P.56)


Standard Accessories

- Collet Nut (CHN-6) • Bar Wrench (PCR-30) : 1 pc.
- Spanner (9 x 9), (15 x 17) : 1 pc. each

LUSTER Attachment (Pistol-Type Polisher)

Code No. **1302** Model **LS-100**

Reciprocating motion

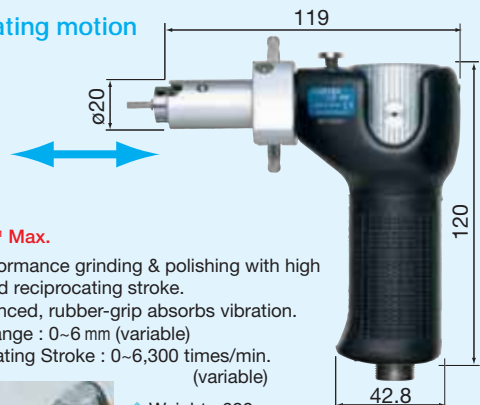

25,000 min⁻¹ Max.

- High performance grinding & polishing with high power and reciprocating stroke.
- Well-balanced, rubber-grip absorbs vibration.
- Stroke Range : 0~6 mm (variable)
- Reciprocating Stroke : 0~6,300 times/min. (variable)



◆ Weight : 680 g

◆ Max. tool shank diameter ø6.4 mm, Screw clamp type

Standard Accessories

- Allen Wrench (2 mm), (3 mm) : 1 pc. each
- Lubricating Oil • Lubrication Nozzle for LUSTER
- Standard Accessories : 1 set


Exclusive Tools P.67 - 69

Standard Accessories

Code No.	Description	Package
62502	Stone Holder	1 pc./pack
62505	Stone Holder	
62751	Spring Holder	
62525	Rectangular Pad	
62526	Rod for Rectangular Pad	
62527	Angle Rod	10 pcs./pack
62552	Sand Paper Tip #120	
62555	Sand Paper Tip #320	
62557	Sand Paper Tip #600	
62559	Sand Paper Tip #1000	

Hammer Attachment

Code No. **8060** Model **HA-500**



16,000 min⁻¹ Max.

- A wide variety of patterns can be produced by varying the spring pressure and hammer speed.
- Light weight, pencil type grip makes the handpiece very comfortable to hold and easy to use.
- Adjustable spring pressure. ◆ Weight : 95 g
- Self lubricating hammer mechanism ensure excellent durability.
- ◆ Stroke Range : 0.4mm ◆ Stroke Times : 25~4,000 times/min.
- ◆ Stroke Spring Pressure : 4.4~7.1 N (Ring Adjustment Type)

Standard Accessories

- Spanner (7 x 5.5) : 1 pc. • Bar Wrench (K-212) : 1 pc.
- Oil and Oil offer machine • Hammer Bit (For replacement) : 2 pcs.


Hammer Bit to be machined to required shapes (SUS-420, heat treated, approx. HRC50)



Code No.	Package
65301	3 pcs./pack

1/4 Speed Reducer

Code No. **1009** Model **RG-01**



30,000 min⁻¹ Max.

- Mounted between an attachment and a motor.
- The speed is reduced to 1/4 but the torque is multiplied by 4 times.
- Suitable for high torque grinding process or drilling.

◆ Weight : 68 g

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

Extension Joint

Code No. **1015** Model **CN-01**



35,000 min⁻¹ Max.

- Speed Ratio 1 : 1
- This is a joint to be connected between a motor and an attachment to extend the total length of the attachment.

◆ Weight : 83 g

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

1/15 Speed Reducer

Code No. **1010** Model **RG-02**



30,000 min⁻¹ Max.

- Mounted between an attachment and a motor.
- The speed is reduced to 1/15 but the torque is multiplied by 15 times.
- Suitable for high torque grinding process or drilling.


◆ Weight : 93 g

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

Foot Controller

Code No. **8106** Model **FC-64**



- Used as an ON/OFF switch as well as a variable speed control.
- For Emax EVOLution (NE249)

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

Emax EVOLution Torque Set

1,000~25,000 min⁻¹



For heavy duty and larger tools, Torque type promises to extend operation ranges. One-touch ring type bur replacement.

Ring Type IR-310 is the standard attachment for Emax EVOLution torque set EV250-120, EV250-230.

Code No. **8234** (120V) Model **EV250-120**

Code No. **8226** (230V) Model **EV250-230**

*Please check the power source plug type (P.58).

Standard Equipment

- Micro Grinder (IR-310+ENK-250T) : 1 pc.
- Collet ϕ 3.0 mm (CHH-3.0), ϕ 2.35 mm (CHH-2.35) : 1 pc. each
- Controller (NE249) : 1 pc.
- Accessories : Handpiece Holder : 1 pc., Handpiece Stand : 1 pc.
Power Supply Cord : 1 pc., Spanner (7 x 5.1) : 1 pc.
Pin Spanner (K-233) : 1 pc., L Shaped Spanner (9) : 1 pc.

Precautions for using Nakanishi Tools

For safe use of the tools

- Please read operation manuals before using any tools.
- Please keep all operation manuals on hand for reference whenever necessary.



Caution

Incorrect use of the tools, or ignoring 'CAUTIONS for safety' described in the operating manuals, could cause fatal or serious bodily injury.

CAUTIONS



Always use safety glasses, mask, face guard for your safety.



Fasten the collet firmly. Make sure the tool is fully installed in the collet to avoid tool slippage.



Do not touch the tools when in operation. Make sure the work area is neat and there is sufficient light.



Do not use damaged or broken electric cords and air hoses.




Do not use the tool where flammable liquids or gases exist.




Start at low speed and increase gradually to insure safe work. This is particularly important for the use of new tools, large cutting tools and elastic tools such as rubber grindstone, sander and brush tools.



Do not leave operating tools. Confirm that the tool has stopped completely after switching off.




Keep the tools and products in a cool, dry place.



Select proper tools and products for your application. Select tools carefully considering the performance of the tools, work procedure and type/shape of the material.



Check the tools carefully before use. Confirm that the tools are free of chips, cracks, splits, scratches, irregular bondings, and out of round shanks, etc.



Fix the work material firmly in a vise and/or other clamping fixture.



Stop grinding or polishing immediately whenever unusual sounds, vibrations, or wear are found. Restart the work only after the problem is found and corrected.



Do not wear loose clothing and/or accessories that may be caught in machinery. Long hair should be secured prior to machine operation.



Only use attachments, parts, consumable articles and accessories produced by NAKANISHI.



Check all tools carefully before use. Clean the inside of the collet and tool shank, chips or fine metals inside the collet could cause tool slippage and result in damage to machinery or bodily injury.



Do not apply high pressure to or pry with the tools. This can break and/or bend the tools. Use the tools within their design limitation. Excessive pressure will decrease the efficiency of your work and cause excessive wear of the tools.







The tools should be used by taking care of the **overhang and below maximum allowable speed.** The catalogue shows the maximum allowable speed at 13 mm overhang (distance between the face of the collet and the top of the tool shank).

Decrease the speed as shown in the table below, if you are using a longer overhang than 13 mm.

Overhang	Maximum allowable speed (min ⁻¹)
Less than 13 mm	Shown in the catalogue (A)
Less than 20 mm	(A) x 0.5
Less than 25 mm	(A) x 0.3
Less than 50 mm	(A) x 0.1

Symbols used in NAKANISHI Tools Catalogue

	<p>Shank Diameter Shows shank diameter of the tools. Nakanishi produces tools with several shank diameters. * Nakanishi micro grinders utilize a collet system, which insures maximum precision. Therefore, please use the collet that best corresponds to the tool shank diameter.</p>
	<p>Standard Package One package is the minimum shipping unit. This number shows the number of pieces in the standard package (bag, box and etc.). Please order the number of packages needed for the desired quantity.</p>
	<p>Maximum allowable speed Do not exceed the maximum allowable tool speed. For your safety, use the tools below the indicated allowable speed. Start at low speed and increase gradually to insure safety. The preceding is particularly important for the use of new tools and machines. * Maximum allowable speed assumes an overhang of less than 13mm. Decrease speed if the overhang is more than 13mm. Refer to "Precautions for using Nakanishi Tools" on the next page. * Check the tools and machinery for mechanical defects prior to each use.</p>
	<p>Grit This shows grain size of various grinding tools.</p> <p>Rough Cutting..... 46, 54, 60, 70, 80, 90 Medium Cutting..... 100, 120, 150, 180 Pre Finishing..... 220, 240, 280, 320, 400 Finishing..... 500, 600, 700, 800, 1000 Fine Finishing and Mirror Polishing..... 1200, 1500, 1800, 2000, 3000, 4000, 6000, 8000</p>

Code No. **62801~**



NAKANISHI's EXCLUSIVE TOOLS

SHANK Ø3.0
12 pcs./pack Electroplated Diamond File

Thickness 1.4	t	Grit	Code No.
0.5 mm	# 200	# 200	62801
0.4 mm	# 400	# 400	62802
0.35 mm	# 600	# 600	62803
0.5 mm	# 200	# 200	62805
0.4 mm	# 400	# 400	62806
0.35 mm	# 600	# 600	62807
# 150	# 150	# 150	62811
# 200	# 200	# 200	62812
# 400	# 400	# 400	62813
# 100	# 100	# 100	62814
# 150	# 150	# 150	62815
# 200	# 200	# 200	62816
# 400	# 400	# 400	62817
# 150	# 150	# 150	62821
# 200	# 200	# 200	62822
# 400	# 400	# 400	62823
# 150	# 150	# 150	62825
# 200	# 200	# 200	62826
# 400	# 400	# 400	62827

Exclusive Tools of "50° & 90° ANGLE"
Special tools for Nakanishi Micro-grinder "Angle Attachment". Highly efficient for grinding, polishing, finishing, etc.

SHANK Ø3.0
5 pcs./pack Special Rubber Pad For Abrasive and

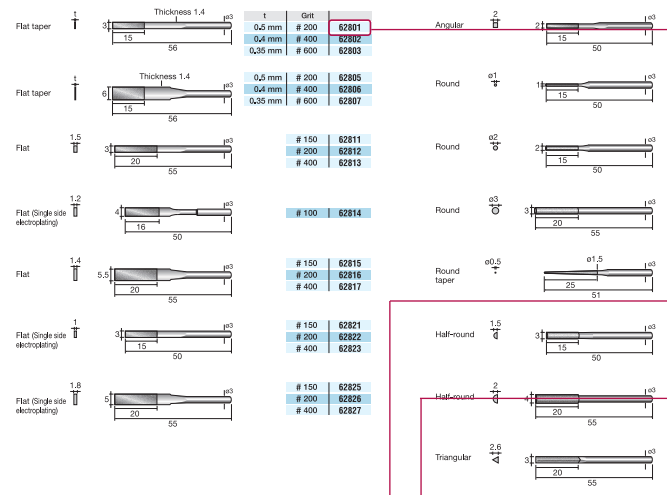End Code number on each page

Code number (Order number)

Standard package quantity

Shank diameter of the tool

Maximum allowable speed

Total length of the tool (mm)

Note : Specifications may be changed without notice. Colors of the tools in this catalogue may not be the same as actual colors due to printing limitations.

Electrically Driven

EmaxEVO
ESPRESSO

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

Line up



Exclusive Tools of "LUSTER"
(P.67~69)



Exclusive Tools of "MINI-LUSTER"
(P.67~69)



Exclusive Tools of "SWING-LUSTER"
(P.67~69)



Exclusive Tools of
"Angle Type Attachment" (P.69~71)



Exclusive Tools of
"Mini Angle Type Attachment" (P.71)



Exclusive Tools of
"FINE BELT SANDER" (P.72~73)

Electrically Driven

EmaxEVO
ESPRT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

NAKANISHI Exclusive Tools

Exclusive Tools of Electromotive Polisher “LUSTER”	P.67~69
Exclusive Tools of Electromotive Polisher “MINI-LUSTER”	P.67~69
Exclusive Tools of Electromotive Polisher “SWING-LUSTER”	P.67~69
Exclusive Tools of “50° & 90° Angle Type Attachment”	P.69~71
Exclusive Tools of “Mini Angle Type Attachment”	P.71
Exclusive Tools of “IMPULSE”	P.72
Exclusive Tools of “FINE BELT SANDER”	P.72~73

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

NAKANISHI's EXCLUSIVE TOOLS

Exclusive Tools of Electromotive Polisher **"LUSTER", "MINI-LUSTER", "SWING-LUSTER"**



LUSTER

Best for finishing large open work areas.

SHANK $\phi 3.0$

1 pc./pack Electroplated Diamond File

Flat taper		Grit	
		# 200	62301
		# 400	62302
		# 600	62303
Flat taper		# 200	62305
		# 400	62306
		# 600	62307
Flat		# 150	62311

Half-round		Grit	
		# 150	62313
Round		# 150	62315
Angular		# 150	62317

1 pc./pack Diamond File Flat Type

* Use with stone holder No.62502.

		Grit	
		# 150	62351
		# 200	62352
		# 400	62353

		Grit	
		# 150	62355
		# 200	62356
		# 400	62357
		# 150	62361
		# 200	62362
		# 400	62363

SHANK $\phi 3.0, \phi 3.5$

3 pcs./pack Precision Finishing Files (Flat, Round, Angular, Triangular, Half-Round)

	Total length The length of file	140mm		180mm
		70mm	90mm	Standard
1.3(1.5) (Flat)		Standard	Fine	Standard
		57301	57311	57321
$\phi 3(3.5)$ (Round)		57302	57312	57322
2.5(2.7) (Angular)		57303	57313	57323

* (Figures) means dimensions for standard file total length 180mm.

	Total length The length of file	140mm		180mm
		70mm	90mm	Standard
3.3(4.1) (Triangular)		Standard	Fine	Standard
		57304	57314	57324
$\frac{2}{D} \frac{1}{5}$ (Half-round)		57305	57315	57325

- 5 files-pack set
- Standard (total length 140mm) set (No.57301~No.57305 : 1pc. each) **57309**
- Fine (total length 140mm) set (No.57311~No.57315 : 1pc. each) **57319**
- Standard (total length 180mm) set (No.57321~No.57325 : 1pc. each) **57329**

SHANK $\phi 3.0$

3 pcs./pack Rasps for plastics and wood working (Flat, Round, Angular, Triangular, Half-Round)

2.2	(Flat)		57401
3.8	(Round)		57402
3.3	(Angular)		57403

3.8	(Triangular)		57404
2.3	(Half-round)		57405

- 5 files-pack set
- Rasps set for plastics and wood working for plastics and woodworking (No.57401~No.57405 : 1pc. each) **57410**

Electrically Driven

Air Driven

General Parts


Exclusive Tools

INDEX


Protective Equip.

NAKANISHI'S EXCLUSIVE TOOLS

1 pc./pack Stone Holder




Maximum clamping thickness
4.5 x Width 11 mm



62502






Maximum clamping thickness
11 x Width 13.5 mm

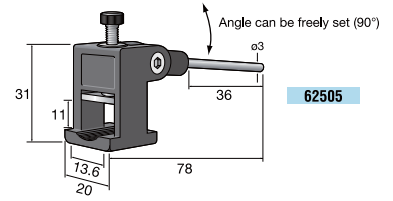

62505

2 pcs./pack Ceramic Fiber Grindstone (Total Length 50 mm)

- Alumina fiber abrasive with the strength and the flexibility for rough or fine finishing.




Grit	Color	W = 4 mm	W = 6 mm
# 180	Ivory	60701	60711
# 300	Brown	60702	60712
# 400	Orange	60703	60713
# 600	Black	60704	60714
# 800	Blue	60705	60715
# 1,000	White	60706	60716
# 1,200	Pink	60707	60717


Grit	Color	W = 4 mm	W = 6 mm	W = 10 mm
# 180	Ivory	60721	60731	62961
# 300	Brown	60722	60732	62962
# 400	Orange	60723	60733	62963
# 600	Black	60724	60734	62964
# 800	Blue	60725	60735	62965
# 1,000	White	60726	60736	62966
# 1,200	Pink	60727	60737	62967

Grit	Color	ø3 mm
# 180	Ivory	63101
# 300	Red	63102
# 400	Orange	63103
# 600	Black	63104
# 800	Blue	63105
# 1,000	White	63106
# 1,200	Pink	63107

1 pc./pack Ceramic Fiber Grindstone Holder • Grindstone Holder




Maximum clamping thickness 1 x Width 4 mm
62506




Maximum clamping thickness 1 x Width 10 mm
62508


Grindstone Holder



Maximum clamping thickness 3 x Width 6 mm
62509





Maximum clamping thickness 1 x Width 6 mm
62507




Maximum clamping thickness 1 x Width 6 mm
62510

1 pc./pack Flat Holder • Tip for use with abrasive sheets.




62512



62982

1 pc./pack Angular Pad Holder

- Holder for use with abrasive tips for polishing flat surfaces.

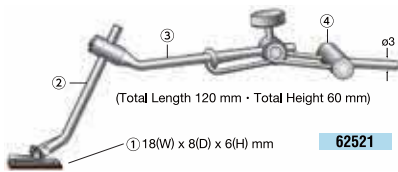

62521

①	62525
②	62526
③	62527
④	62751

Abrasive Tip (For Flat Holder and Angular Pad Holder)


100 pcs./pack Sand Paper Tip



Grit		Grit	
# 120	62552	# 1,000	62559
# 320	62555	# 1,500	62560
# 600	62557		


Adhesive Back

3 pcs./pack Wood Tip Holder



W	
10 mm	62621
15 mm	62622
20 mm	62623

1 pc./pack Spring Holder



* Mountable shaft diameter range ø1~ø3.3 mm

62751

NAKANISHI's EXCLUSIVE TOOLS



1 pc./pack Electroplated Diamond File

Flat taper		t	Grit	
		0.5 mm	# 200	62801
		0.4 mm	# 400	62802
		0.35 mm	# 600	62803
Flat taper		0.5 mm	# 200	62805
		0.4 mm	# 400	62806
		0.35 mm	# 600	62807
Flat		# 150	62811	
		# 200	62812	
		# 400	62813	
Flat (Single side electroplating)		# 100	62814	
Flat		# 150	62815	
		# 200	62816	
		# 400	62817	
*62815 is thickness 1.4mm.				
Flat (Single side electroplating)		# 150	62821	
		# 200	62822	
		# 400	62823	
Flat (Single side electroplating)		# 150	62825	
		# 200	62826	
		# 400	62827	

Angular		Grit	
		# 150	62831
		# 200	62832
		# 400	62833
Round		# 100	62840
		# 150	62841
		# 200	62842
		# 400	62843
Round		# 150	62845
		# 200	62846
		# 400	62847
Round		# 150	62851
		# 200	62852
		# 400	62853
Round taper		# 150	62855
		# 200	62856
		# 400	62857
Half-round		# 150	62865
		# 200	62866
		# 400	62867
Half-round		# 150	62871
		# 200	62872
		# 400	62873
Triangular		# 150	62881
		# 200	62882
		# 400	62883

Electrically Driven

EMAN EVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools

EXCLUSIVE TOOLS

INDEX

Protective Equip.

Exclusive Tools of "60° & 90° ANGLE"

Special tools for Nakanishi Micro-grinder "Angle Attachment". Highly efficient for grinding, polishing, finishing, etc.

SHANK 03.0

5 pcs./pack Special Rubber Pad For Abrasive and Felt Disks

20,000 min⁻¹

64101, 64102, 64103

100 pcs./pack Sand Paper Disk

Cloth Type
• For Metals ... Both for dry and wet finishing (Adhesive is resistant to water and oil)

Paper Type
• For Metals ... Both for dry and wet finishing (Adhesive is resistant to water and oil)

For Metals	Grit	ø11	ø21	ø31
	# 60	64111	64121	64141
	# 80	64112	64122	64142
	# 120	64113	64123	64143
	# 180	64114	64124	64144
	# 240	64115	64125	64145
	# 320	64116	64126	64146
	# 400	64117	64127	64147
	# 600	64118	64128	64148
	# 800	64119	64129	64149
# 1,000	64120	64130	64150	

Adhesive Back

For Metals (Black)	Grit	ø11	ø21	ø31
	# 80	64131	64151	64171
	# 120	64132	64152	64172
	# 180	64133	64153	64173
	# 240	64134	64154	64174
	# 320	64135	64155	64175
	# 400	64136	64156	64176
	# 600	64137	64157	64177
	# 800	64138	64158	64178
	# 1,000	64139	64159	64179
# 1,500	64140	64160	64180	

Adhesive Back

Paper Type
• Dry type ... For Metal, Woodwork, Paint, Putty polishing, Dry use

For Dry type (White)	Grit	ø11	ø21	ø31
	# 80	64201	64211	64221
	# 120	64202	64212	64222
	# 180	64203	64213	64223
	# 240	64204	64214	64224
	# 320	64205	64215	64225
	# 400	64206	64216	64226
# 600	64207	64217	64227	

Adhesive Back

NAKANISHI'S EXCLUSIVE TOOLS

100 pcs./pack Zirconium Disk

- Best for finishing aluminum, stainless steel, copper alloy, brass, etc.



Grit	ø11	ø21	ø31
# 60	64251	64261	64271
# 80	64252	64262	64272
# 120	64253	64263	64273
# 150	64254	64264	64274

Adhesive Back

20 pcs./pack Fiber Disk

- Soft finishing can be done on flat & curved surfaces, due to superior flexibility.



Grit	Color	ø11	ø21	ø31
# 120	Brown	64281	64291	64301
# 240	Violet	64282	64292	64302
# 320	Red Brown	64283	64293	64303
# 600	Dark Blue	64284	64294	64304
# 800	Gray	64285	64295	64305
# 1,000	Orange	64286	64296	64306

* Thickness 3 mm

Adhesive Back

20 pcs./pack Felt Disk

- Ideal for finishing using abrasives and diamond compounds.



Description	ø11	ø21	ø31
Soft Type Felt Disk (1mm thickness)	64331	64332	64333
Soft Type Felt Disk (2mm thickness)	64335	64336	64337

Adhesive Back

20 pcs./pack Felt Disk Chromium Oxide (Blue Rouge) Embedded Type.

- Useful for speedy finishing because of Chromium Oxide (Blue Rouge) Embedded.



Description	ø11	ø21	ø31
Felt Disk Chromium Oxide (Blue Rouge) Embedded Type. (2mm thickness)	64341	64342	64343

Adhesive Back

20 pcs./pack Rubber Points Disk

- Best for coarse finishing, pre-finishing with great polishing power.



Grit	Color	ø20	ø30
# 60	Brown	64391	64401
# 80	Red	64392	64402
# 120	Dark Green	64393	64403
# 180	Olive	64394	64404
# 220	Green	64395	64405
# 320	Brown	64396	64406

* Thickness 3 mm

Adhesive Back


SHANK ø3.0

5 pcs./pack Mounted Rubber Disks (Rubber Pad Integration)

- Moderately hard abrasive grain have great polishing ability.



For finishing			
Grit	Color	WA	GC
# 80	Pink	64411	—
# 80	Purple	—	64421
# 120	Blue	64412	64422
# 180	Yellow	64413	—
# 180	Green	—	64423
# 220	Green	64414	64424
# 320	Purple	64415	64425
# 500	Orange	64416	—
# 500	Brown	—	64426



For preliminary finishing (Fast grinding)

Grit	Color	WA
# 80	Black (Red Line)	64431
# 120	Black (Blue Line)	64432

1 pc./pack Diamond Disk (Fully Electroplated Type)

- Superior in sharpness and durability.



Grit	ø11	ø21	ø31
# 100	64451	64461	64471
# 140	64452	64462	64472
# 200	64453	64463	64473
# 280	64454	64464	64474
# 400	64455	64465	64475
# 600	64456	64466	64476
# 800	64457	64467	64477
# 1,000	64458	64468	64478

Adhesive Back

1 pc./pack Diamond Disk (Dot Electroplated Type, Wet Type)

- Electroplated nickel-alloy pellet is strongly adhered to resin base.



Grit	Color	ø11	ø21	ø31
# 60	Green	64501	64511	64521
# 120	Black	64502	64512	64522
# 200	Red	64503	64513	64523
# 400	Yellow	64504	64514	64524
# 800	Gray	64505	64515	64525

Adhesive Back

Electrically Driven

EMAXEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools


EXCLUSIVE TOOLS

INDEX

Protective Equip.

NAKANISHI's EXCLUSIVE TOOLS

3 pcs./pack Resin Bond Diamond Disk
Star Pattern



*Patterns may be changed without notice

Star Pattern	Grit	ø11	ø21	ø31
	# 80	64531	64541	64551
	# 120	64532	64542	64552
	# 180	64533	64543	64553
	# 240	64534	64544	64554
	# 400	64535	64545	64555
	# 600	64536	64546	64556
	# 800	64537	64547	64557
	#1,000	64538	64548	64558
	#2,000	64539	64549	64559

Adhesive Back

3 pcs./pack Lapping Film Disk
Diamond Abrasive



Diamond Film (Diamond)	Grit	Color	ø11	ø21	ø31
	# 400	Ivory	64601	64606	64611
	# 800	Ivory	64602	64607	64612
	#1,500	Ivory	64603	64608	64613
	#3,000	Ivory	64604	64609	64614

Adhesive Back

50 pcs./pack Lapping Film Disk
WA Abrasive



Arandom Film (WA)	Grit	Color	ø11	ø21	ø31
	# 320	Pink	64621	64626	64631
	# 600	Green	64622	64627	64632
	#1,000	Orange	64623	64628	64633
	#1,500	Olive	64624	64629	64634
	#3,000	Violet	64625	64630	64635

Adhesive Back


SHANK ø3.0

Lap Ring




• Plastic and brass lapping rings for use with abrasive and diamond compounds.

10 pcs./pack Replacement Plastic Ring



64713 64717

5 pcs./pack Replacement Brass Ring




64723 64727

*Do not use the same ring for different abrasive compound grits.


1 pc./pack Replacement Holder

For internal diameter ø6 mm



64731

For internal diameter ø10 mm



64732

Exclusive Tools of "90° MINI ANGLE TYPE ATTACHMENT"



Steel cutters for radius grinding of deep cross holes for "Mini-Angle attachment". Ideal for radius grinding of holes or removing burrs from cross jigs, precision parts and inside surfaces of pipes.




MINI ANGLE TYPE Attachment (Very Small Head)



MINI ANGLE TYPE Attachment

SHANK ø1.6


1 pc./pack Steel Cutters For Deep Cross Hole Finishing



64801


SHANK ø1.6

1 pc./pack Diamond Coated Burs For Deep Cross Hole Finishing

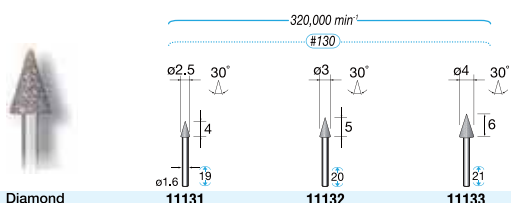

Diamond 11131 11132 11133

5 pcs./pack Diamond and CBN Coated Burs For Deep Cross Hole Finishing

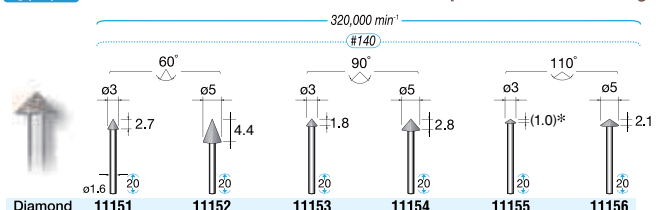

Diamond 11151 11152 11153 11154 11155 11156
CBN 11161 11162 11163 11164 11165 11166

*11165 is Cut Length 1.4mm.

Electrically Driven

EmaxEVO ESPERT

Air Driven

ROTUS IMPULSE PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools

EXCLUSIVE TOOLS

INDEX


Protective Equip.

NAKANISHI'S EXCLUSIVE TOOLS

Exclusive Tools of "IMPULSE"




Special tools for Nakanishi Micro-grinder "IMPULSE".
Excellent for grinding or polishing flat surfaces, edges with Nakanishi's high-power air grinder.



90° ANGLE IMPULSE
· NA90-230

60° ANGLE IMPULSE
· NA45-230


5 pcs./pack Special Rubber Pad for Disk Abrasives

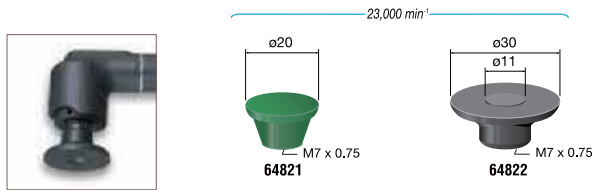

23,000 min⁻¹
ø20
2.8
M7 x 0.75
64821

23,000 min⁻¹
ø30
ø11
M7 x 0.75
64822


12 pcs./pack Cup Wheel



Grit	Grade Hardness	ø20	ø30
# 36	Standard	64830	64835
# 46	Hard	64831	64836
# 80	Standard	64832	64837
# 80	Hard	—	64838

5 pcs./pack Polishing Sander

• Abrasive Disk for high speed rotation is made from overlapping abrasive cloths.

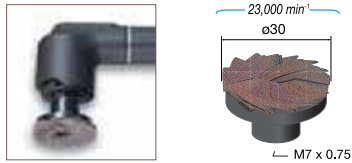


23,000 min⁻¹
ø30
6
M7 x 0.75

Grit	
# 80	64842
# 120	64844
# 180	64846
# 240	64847
# 400	64849

• Convenient Assorted set for trial polishing
All grain size (5 types x each 1 pc.)
Total 5 pcs.-pack **64850**

10 pcs./pack Rubber Cup Wheel

• Rubber Cup Wheel with high elasticity for grinding & polishing.



23,000 min⁻¹
ø30
6
M7 x 0.75

Grit	Color	
# 60	Brown	64851
# 80	Red	64852
# 120	Blue	64853
# 180	Olive	64854
# 220	Green	64855
# 320	Brown	64856

• Convenient Assorted set for trial polishing
All grain size (6 types x each 2 pcs.)
Total 12 pcs.-pack **64859**

Exclusive Tools of "FINE BELT SANDER"



FINE BELT SANDER Attachment

30 pcs./pack Abrasive Belts

• High Quality Abrasive Belts are superior in grinding & durability.



For Grinding or Polishing of Metals (Length 300 mm)

Grit	W = 4 mm	W = 6 mm	W = 8 mm
# 80	64901	64911	● 64921
# 120	64902	64912	● 64922
# 180	64903	64913	● 64923
# 240	64904	64914	● 64924
# 320	64905	64915	● 64925
# 400	64906	64916	● 64926
# 600	—	—	● 64927
# 800	—	—	● 64928

• Assorted set for preliminary finishing (● Mark)
Grain size (4 types x each 10 pcs.), W = 8 mm
Total 40 pcs.-pack **64931**

• Assorted set for finishing (● Mark)
Grain size (4 types x each 10 pcs.), W = 8 mm
Total 40 pcs.-pack **64932**



For Woodwork (Length 300 mm)

Grit	8 mm Width
# 80	64941
# 120	64942
# 240	64943

• Assorted set for woodwork
All grain size (3 types x each 10 pcs.)
Total 30 pcs.-pack **64955**

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

NAKANISHI's EXCLUSIVE TOOLS

3 pcs./pack Diamond Belt

• For grinding and polishing of Carbide, Hardened steel, Steel, Special steels, Ceramic, FRP, etc.



Hard Type (Length 300 mm)

Grit	8 mm Width
# 80	65011
# 120	65012
# 240	65014
# 320	65015
# 600	65017

• **Assorted set**
 All grain size (5 types x each 1 pc.)
 Total 5 pcs.-pack **65019**



Soft Type (Length 300 mm)

Grit	8 mm Width	Grit	8 mm Width
# 120	65021	# 600	65025
# 180	65022	# 800	65026
# 240	65023	# 1,000	65027
# 320	65024		
# 400	65028		

• **Assorted set**
 All grain size (8 types x each 1 pc.)
 Total 8 pcs.-pack **65030**

30 pcs./pack Zirconium Belt

• Best for polishing aluminum, stainless steel, brass



(Length 300 mm)

Grit	8 mm Width
# 80	64971
# 100	64972
# 120	64973

• **Assorted set**
 All grain size (3 types x each 10 pcs.)
 Total 30 pcs.-pack **64975**

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

Electrically Driven

E_{max}EVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS


CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

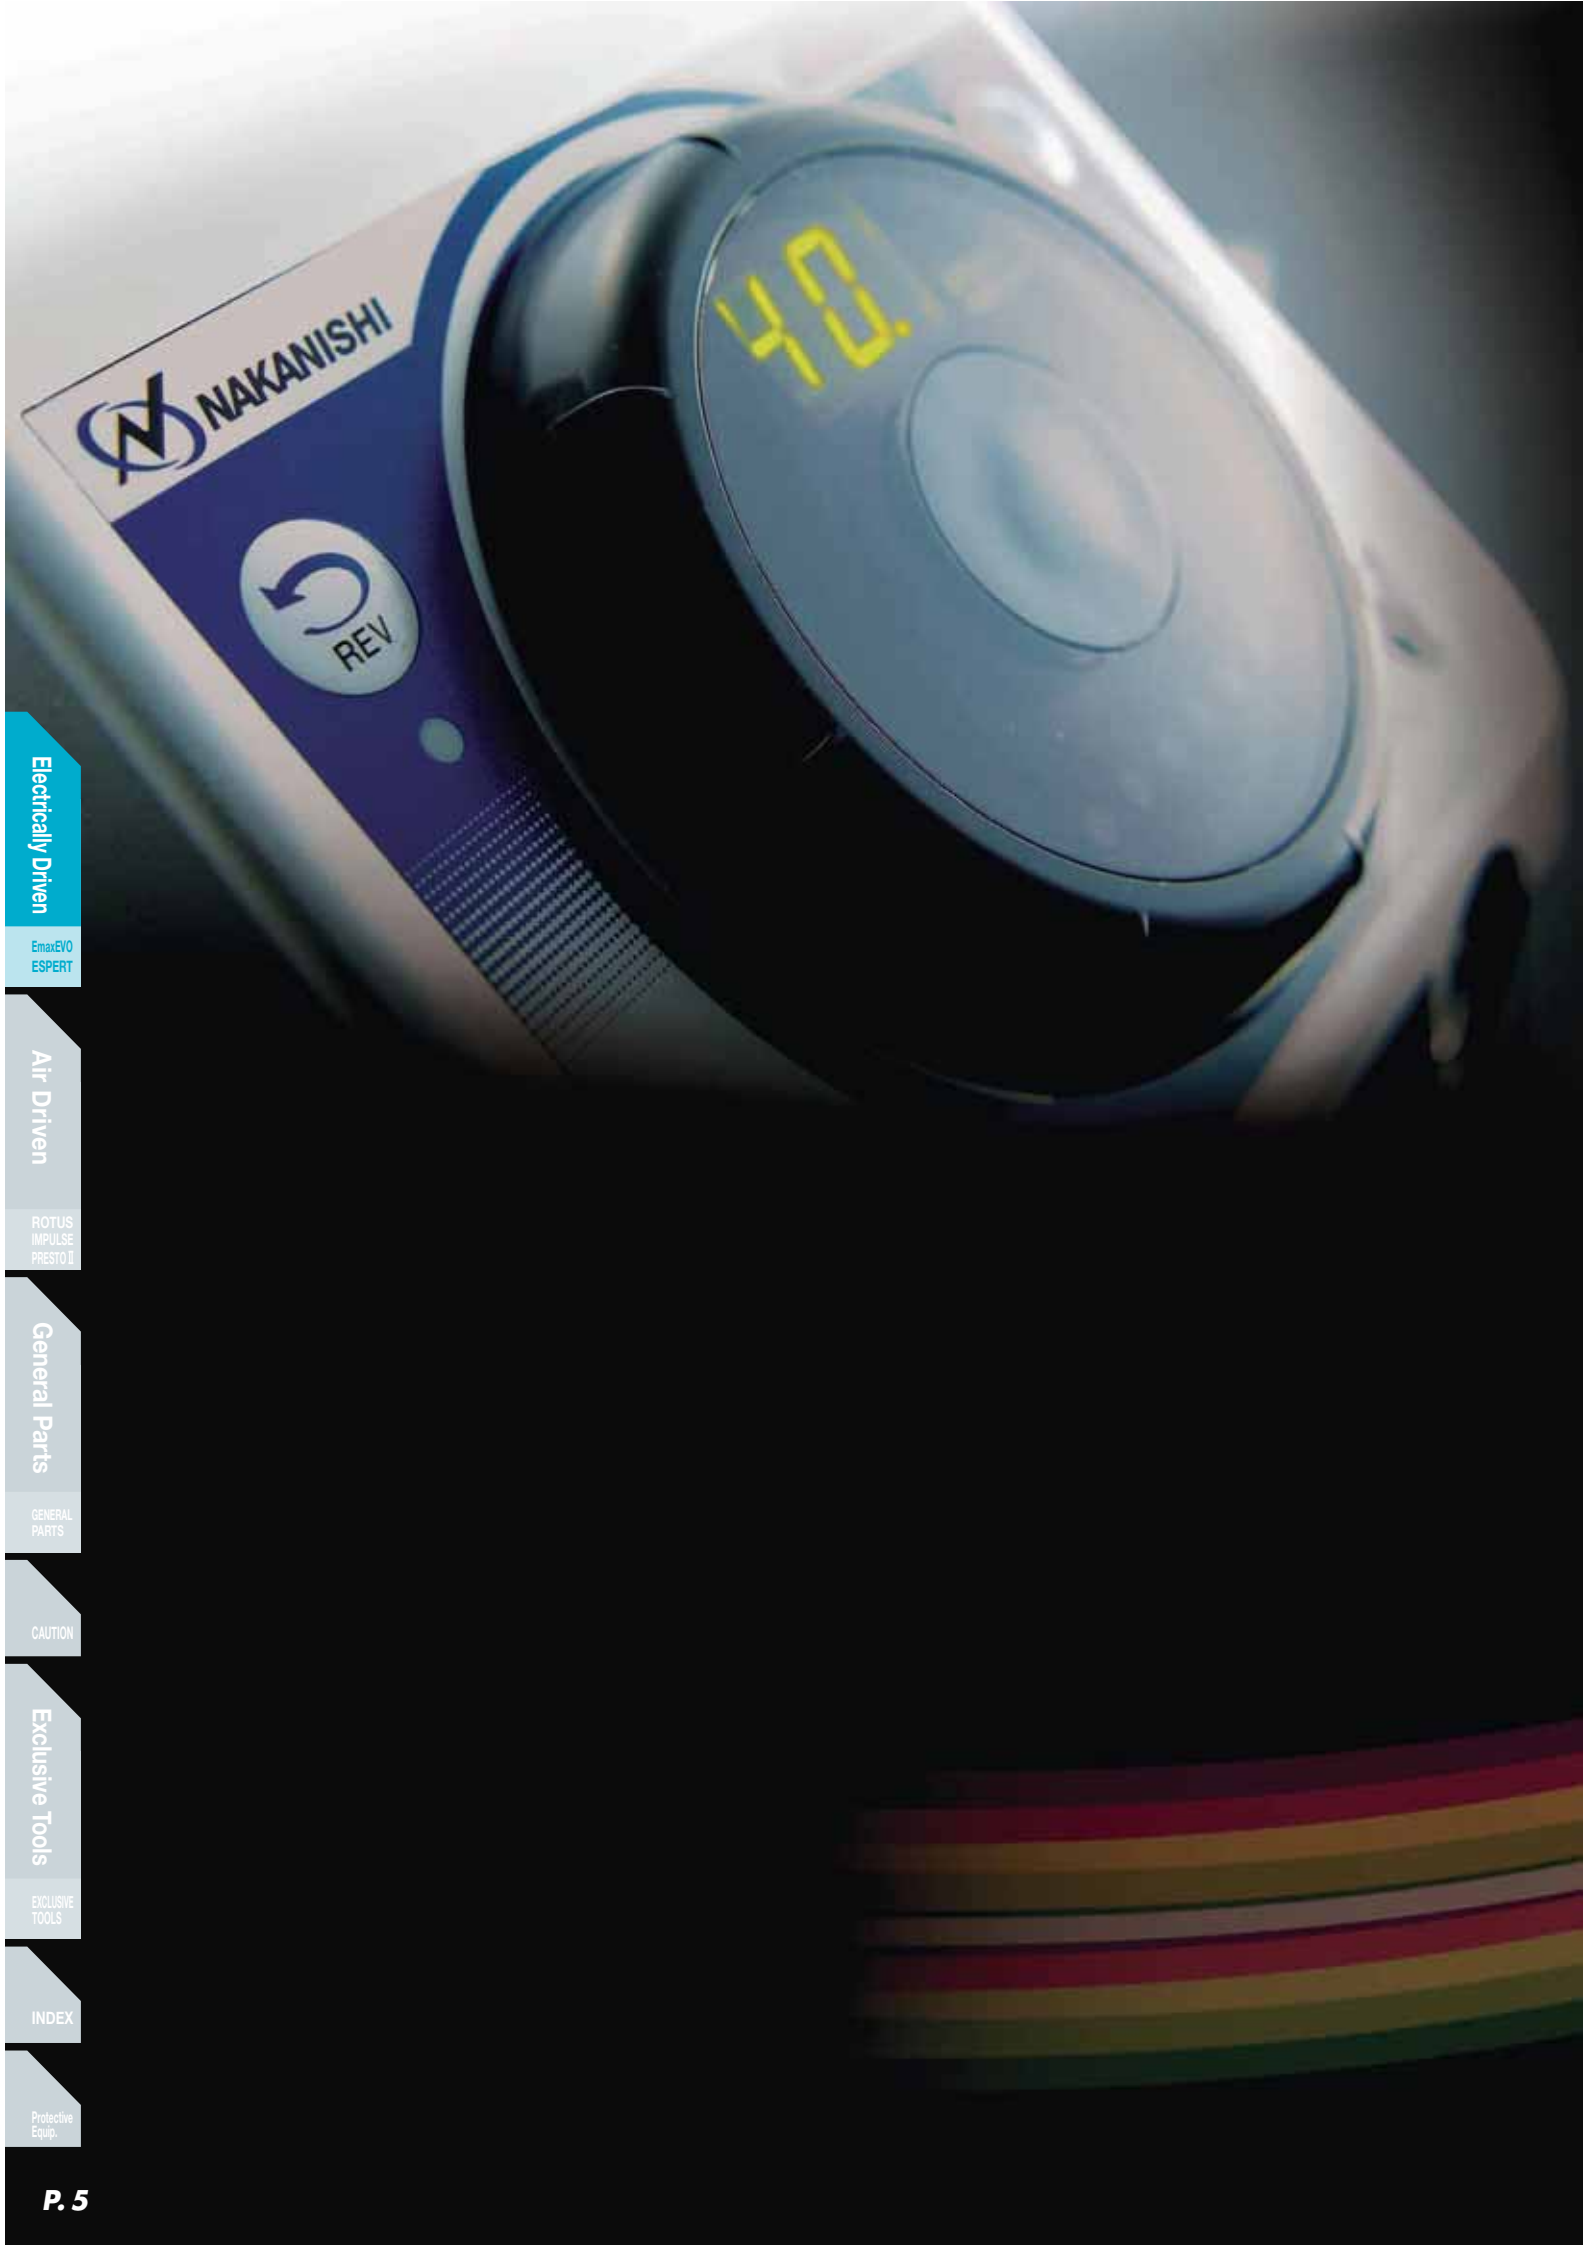

NAKANISHI

REV

40.00

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

www.klingseisen.de

Kontaktieren Sie

[unser Team:](#)



Brunnenstraße 2 · 78554 Aldingen

Tel. +49 (0)7424 98192-0 · Fax +49 (0)7424 84601 · info@klingseisen.de