

TOOLS & SOLUTIONS

ROTUS Series

Katalogauszug



ATTACHMENT TYPE MICRO AIR GRINDER

ROTUS Series

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.



- Interchangeability with a variety of attachments ideal for any applications.
- To achieve high torque, ROTUS air motor is assembled with micron precision between the vanes and the internal surface of the cylinder using NAKANISHI's proprietary techniques.
- Lightweight and compact design.
- Assembled with ON/OFF, speed control and FWD./REV. by the Ring Switch.

ROTUS SERIES ◀◀



ROTUS Standard Set

Code No.	1163	Model	ROTUS-IR
----------	-------------	-------	----------

A Special Rotary Vane Air Motor is Incorporated

The air motor utilizes a special vane design which keeps constant speed even under load providing stable grinding and polishing operation.

Excellent quietness with Silencer

By attaching the silencer to the end of the exhaust air tubing, the motor is operated extremely quiet.

Twist Free Hose

To prevent twisting of the hose, 360° Twist-Free Joint connects the motor and the hose. (IM-301)

30,000 min⁻¹



Ring Type Attachment

Code No.	1147	Model	IR-310
----------	-------------	-------	--------

ROTUS Air Motor

Code No.	1004	Model	IM-301
----------	-------------	-------	--------

14 Types of Attachments Available

14 different types of attachments making an almost infinite number of applications possible.



* ROTUS Attachment is exchangeable for Emax EVOLUTION. System Chart Emax EVOLUTION Series / ROTUS Series (P.11-12)

Set-Up Drawing



■ Use Air Line Kit AL-H1207F or air supply 3 pieces set. (Air Filter, Air Regulator, Lubricator)

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

ROTUS Series System Chart

Code No.	Model
----------	-------

Attachment

1147	IR-310
------	--------



Ring Type

1005	IH-300
------	--------



Lever Type

2811	IG-400
------	--------



Straight Type

1016	HG-200
------	--------



6 mm Torque Type

1017	BMH-300
------	---------



Long Type

1012	MFC-300S
------	----------



90° Mini Angle Type

1013	MFC-300M
------	----------



90° Mini Angle Type (Very Small Head)

1006	IC-300
------	--------



90° Angle Type

1014	KC-300
------	--------



50° Angle Type

LUSTER	
1302	LS-100



Pistol-Type Polisher
(Reciprocating motion)

MINI-LUSTER	
1307	ML-8



Pencil-Type Reciprocating Polishing Finisher
(Reciprocating motion)

SWING-LUSTER	
1380	SLS-16



Pencil-Type Reciprocating Polishing Finisher
(Right to left motion)

Hammer Action Type	
8060	HA-500



Engraving and Ornament Processing
Work Hammer

FINE BELT SANDER	
1146	KBS-101



Small-sized Handy Belt Sander

Speed Reducer·Extension Joint



Extension Joint

1015	CN-01
------	-------



1/4 Speed Reducer

1009	RG-01
------	-------



1/15 Speed Reducer

1010	RG-02
------	-------

- May be connected between the motor and the attachment when required increased torque.

Motor



- Air Motor with Hose
360° Twist-Free Joint Mechanism

1004	IM-301	3,000~30,000 min ⁻¹
------	--------	--------------------------------

- Air Line Kit



4507	AL-H1207F
------	-----------

- Foot Controller



1064	AFC-45
------	--------

*This air line kit is designed for use with the AFC-45 foot controller, Code No.1064.

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.


⚠ Details of Maximum Allowable speed on intermittent use or continuous use P.41~44

PRECISION HIGH TORQUE AIR MOTOR · STANDARD SET

ROTUS Air Motor · Standard Set

 3,000~30,000 min⁻¹

- To achieve high torque, ROTUS air motor is assembled with micron precision between the vanes and the internal surface of the cylinder using NAKANISHI's proprietary techniques.
- This high performance air motor with minimal power loss from load fluctuation has excellent performance in its grinding stability. Moreover, the motor with minimal air consumption runs quietly and the energy-saving mechanism makes it possible to operate with a 0.75KW (1hp) air compressor.
- Lightweight and compact design. 130 g (w/o hose)
- 14 types of attachments for all types of applications.
- ON/OFF, FWD./REV. Rotation Direction and Motor Speed can be controlled only by the Ring Switch.
 - ◆ Foot controller is available (P.44) : used as an ON/OFF switch as well as a variable speed control.
- Air cooling system generates no heat for continuous operation.
- By attaching the silencer to the end of the exhaust air tubing, the motor is operated extremely quiet.
- Twist-Free Joint mechanism is installed in IM-301 to solve the problem of hose twisting.

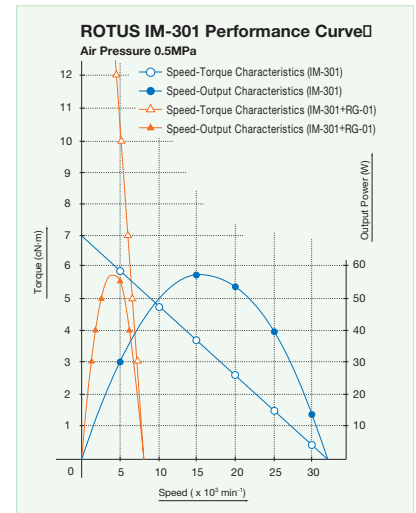

ROTUS Air Motor (with Twist-Free Joint Mechanism)

 2,000~30,000 min⁻¹

Code No.	1004	Model	IM-301
----------	------	-------	--------

- ◆ Speed : Max. 30,000 min⁻¹ (0.4 MPa)
- ◆ Proper Air Pressure : 0.3~0.45 MPa
- ◆ Air Consumption : 75 NL/min ◆ Output Power : 46 W
- ◆ Max. Torque : 6.6 cN·m (0.4 MPa) ◆ Weight : 130 g (w/o hose)

Standard Accessories
 • Hose (K-206) : 2 m • Silencer (K-209) • Pin Spanner (K-233) : 1 pc.



<Air Motor with 360° Twist-Free Joint Mechanism>

- Adopted Twist-Free Joint mechanism between the motor and the hose has solved the problem of hose twisting.



ROTUS Standard Set


30,000 min⁻¹ (Speed)

The ROTUS System is a hand-held grinder with an energy saving air motor. Since it is an air driven system, there is virtually no heat generation resulting in excellent durability. Select from a variety of attachments depending on the application.

The Ring type IR-310 is a standard attachment for ROTUS standard set ROTUS-IR.

Code No.	1163	Model	ROTUS-IR
----------	------	-------	----------

- Standard Equipment
- Air Grinder (IR-310+IM-301) : 1 pc.
 - Collet ø3.0mm (CHH-3.0), ø2.35 mm (CHH-2.35) : 1 pc. each
 - Air Line Kit (AL-H1207F) : 1 pc. • Foot Controller (AFC-45) : 1 pc.
 - Accessories : Piping Hose 2m (K-275) : 1 pc., Lubricating Oil (K-211) : 1 pc. Spanner (7x5.1) : 1 pc., Pin Spanner (K-233) : 2 pcs. L Shaped Spanner (9) : 1 pc.

Specifications (IM-301 + IR-310)

Weight	Max. Torque	Speed	Proper Air Pressure	Air Consumption	Output Power	Collet
222g(*)	6.6 cN·m (0.4 MPa)	30,000 min ⁻¹	0.3~0.45 MPa	75 NL/min	46 W (Motor)	ø0.3~ø3.175 mm CHH Group (P.55)

* Weight (w/o Hose)

 ◆ Order by Code No. **P.40**

Electrically Driven

 EmatEVO
 EXPERT

Air Driven

 ROTUS
 IMPULSE
 PRESTO II

General Parts

 GENERAL
 PARTS

CAUTION

Exclusive Tools


 EXCLUSIVE
 TOOLS

INDEX

 Protective
 Equip.

Ring Type Attachment

Code No. **1147** Model **IR-310**

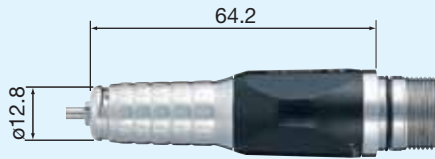

40,000 min⁻¹ Max.

- High precision and high reliability is realized by micron precision.
- Slim, lightweight design allows for fine finishing of delicate parts.
- One-touch ring type bur replacement.



◆ Weight : 92 g

Standard Size Collet

ø3.0 mm (CHH-3.0) ø2.35 mm (CHH-2.35)


Optional Collets : CHH group are shown in page (P.55)

Standard Accessories

- Spanner (7x5.1) : 1 pc. • Pin Spanner (K-233) : 1 pc.
- L Shaped Spanner (9) : 1 pc.

Lever Type Attachment

Code No. **1005** Model **IH-300**

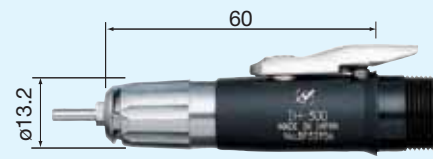

40,000 min⁻¹ Max.

- High precision and high reliability is realized by micron precision.
- Slim, lightweight design allows for fine finishing of delicate parts.
- Lever Type one touch bur release.



◆ Weight : 62 g

Standard Size Collet

ø3.0 mm (CHH-3.0) ø2.35 mm (CHH-2.35)


Optional Collets : CHH group are shown in page (P.55)

Standard Accessories

- Spanner (7x5.1) : 1 pc.
- Pin Spanner (K-233) : 1 pc.

Straight Type Attachment

Code No. **2811** Model **IG-400**

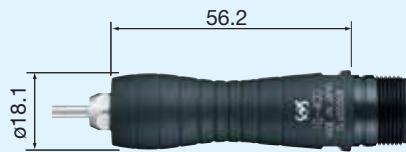

40,000 min⁻¹ Max.

- Lightweight ergonomically designed with minimal vibration for extended use.
- NK Micron Collet permits strong retention and high precision performance.



◆ Weight : 55 g

Standard Size Collet

ø3.0 mm (NKM6-3.0)


Optional Collets : NKM6 group are shown in page (P.56)

Standard Accessories

- Collet Nut (CHN-6) • Bar Wrench (PCR-30) : 1 pc.
- Spanner (9 x 9), (15 x 17) : 1 pc. each

6 mm Torque Type Attachment

Code No. **1016** Model **HG-200**

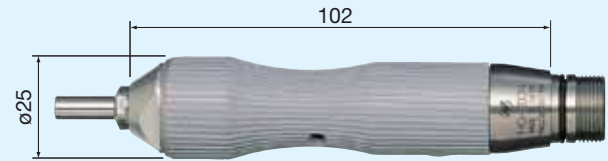

30,000 min⁻¹ Max.

Please use it with Speed Reducer.

- Permits the use of ø6.0 mm shank burs.
- The resistance produced by cutting and grinding is absorbed by a special rubber grip to eliminate slipping.
- Collet is tightened by a spanner.



◆ Weight : 210 g

Standard Size Collet

ø6.0 mm (CHG-6.0)

Optional Collets : CHG group are shown in page (P.55)

Standard Accessories

- Spanner (10 x 10) : 1 pc. • Bar Wrench (K-212) : 1 pc.
- Pin Spanner (K-233) : 1 pc.

Long Type Attachment

Code No. **1017** Model **BMH-300**

Tip diameter ø13 mm (For Deep Hole Grinding)



35,000 min⁻¹ Max.

- This unique slim body makes it ideal for cutting and grinding the bottom surface of deep ribs or holes.
- Collet is tightened by a spanner.



◆ Weight : 156 g

Standard Size Collet

ø3.0 mm (CHM-3.0)

Optional Collets : CHM group are shown in page (P.56)

Standard Accessories

- Spanner (7 x 5.1), (6 x 4.5) : 1 pc. each
- Pin Spanner (K-233) : 1 pc.

Electrically Driven

EmaxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS


INDEX

Protective
Equip.

90° Mini Angle Type Attachment

Code No. **1013** Model **MFC-300M**

For Chamfering Deep Hole, Bur Only $\phi 1.6$ mm

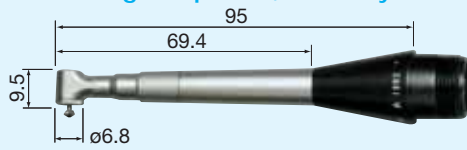

15,000 min⁻¹ Max.
Please use it with Speed Reducer.

- The world's smallest angle type attachment.
- Suitable for chamfering and deburring the inside of the slit pipe.



- ◆ Minimum Inner Diameter : $\phi 13$ mm
- ◆ Holding tool width : 7.2 mm
- ◆ Weight : 47 g
- ◆ Speed Reduction Ratio : 10/11


Standard Size Collet Exclusive Tools P.71
 $\phi 1.6$ mm (K-253) P.56

Standard Accessories
• Chuck Wrench (K-232) : 1 pc. • Pin Spanner (K-233) : 1 pc.

90° Mini Angle Type Attachment

Code No. **1012** Model **MFC-300S**

For Chamfering Deep Hole, Bur Only $\phi 1.6$ mm

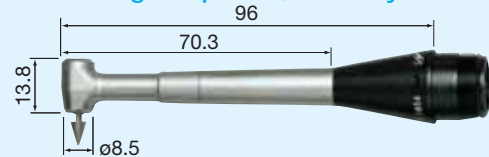

15,000 min⁻¹ Max.
Please use it with Speed Reducer.

- Suitable for chamfering and deburring the inside of the slit pipe.
- ◆ Minimum Inner Diameter : $\phi 20$ mm



- ◆ Holding tool width : 11.9 mm
- ◆ Weight : 50 g
- ◆ Speed Reduction Ratio : 10/11

Standard Size Collet Exclusive Tools P.71
 $\phi 1.6$ mm (K-252) P.56

Standard Accessories
• Chuck Wrench (K-232) : 1 pc. • Pin Spanner (K-233) : 1 pc.

SWING-LUSTER Attachment

Code No. **1380** Model **SLS-16**

Right to Left motion



30,000 min⁻¹ Max.


- High speed grinding and polishing operations can be performed while maintaining the fine and delicate feeling of hand polishing.
- Lightweight pencil type design makes it easy to work in tight areas.
- Easily adjustable stroke length allows efficient work on minute areas or large sections.
- ◆ Weight : 127 g ◆ Stroke Range (variable) : 0~1.6 mm
- ◆ Reciprocating Stroke (variable) : 0~7,650 times/min.
- ◆ Max. tool shank diameter $\phi 5.0$ mm, Screw clamp type.

Standard Accessories Exclusive Tools P.67~69
• Spanner (16 x 18), (20 x 24) : 1 pc. each
• Allen Wrench (1.5 mm) : 1 pc. • Standard Accessories : 1 set

Code No.	Description	Package
60737	Ceramic Fiber Grindstone 1 x 6 x 50 #1200	1 pc. each
62814	Electroplated Diamond File 1.2 x 4 x 50 #100	
62510	Ceramic Fiber Grindstone Holder	

Hammer Attachment

Code No. **8060** Model **HA-500**



16,000 min⁻¹ Max.
Please use it with Speed Reducer.

- A wide variety of patterns can be produced by varying the spring pressure and hammer speed.
- Light weight, pencil type grip makes the handpiece very comfortable to hold and easy to use.
- Adjustable spring pressure. ◆ Weight : 95 g
- Self lubricating hammer mechanism ensure excellent durability.
- ◆ Stroke Range : 0.4 mm ◆ Stroke Times : 25~4,000 times/min.
- ◆ Stroke Spring Pressure : 4.4~7.1 N (Ring Adjustment Type)

Standard Accessories
• Spanner (7 x 5.5) : 1 pc. • Bar Wrench (K-212) : 1 pc.
• Oil and Oil offer machine • Hammer Bit (For replacement) : 2 pcs.


Hammer Bit to be machined to required shapes
(SUS-420, heat treated, approx, HRC50)



Code No.	Package
65301	3 pcs./pack

ROTUS Air Motor (with Chip Air Mechanism)

Code No. **1003** Model **IM-300**



- ◆ Speed : 3,000~30,000 min⁻¹ ◆ Proper Air Pressure : 0.3~0.45 MPa
- ◆ Air Consumption : 75 NL/min ◆ Output Power : 46 W
- ◆ Max. Torque : 6.6 cN·m (0.4MPa) ◆ Weight : 130 g (w/o hose)

Standard Accessories
• Hose (K-207) : 2 m • Silencer (K-209) • Pin Spanner (K-233) : 1 pc.

<Air Motor with Chip Air Mechanism>


- Air motor IM-300 with Chip Air Mechanism blows away the cutting dust with clean air coming through the top end of the attachment. The hand-held cutting work remains cool by the chip air allowing comfort through out the working process.



This is only with the attachment IH-300.

90° Angle Attachment

Code No. **1006** Model **IC-300**



30,000 min⁻¹ Max.
Please use it with **Speed Reducer**.

- Suitable for polishing a flat surface at speed with a grinding disk pad.
- Capable of applications for rough cutting to mirror finishing.
- Speed Reduction Ratio : 3/4



◆ Weight : 45 g

Standard Size Collet

ø3.0 mm (CHC-3.0)

Optional Collets : CHC group are shown in page (P.55)

Standard Accessories


- Chuck Wrench (K-231) : 1 pc.
- Pin Spanner (K-233) : 1 pc.
- Standard Accessories : 1 set

Standard Accessories

Code No.	Description	Package
64101	Rubber Pad (Small) O.D. ø10 mm	1 pc./pack
64102	Rubber Pad (Med) O.D. ø20 mm	
64103	Rubber Pad (Large) O.D. ø30 mm	
64133	Sand Paper Disk for small pad ø11 #180	5 pcs./pack
64137	Sand Paper Disk for small pad ø11 #600	
64153	Sand Paper Disk for med. pad ø21 #180	
64157	Sand Paper Disk for med. pad ø21 #600	
64173	Sand Paper Disk for large pad ø31 #180	
64177	Sand Paper Disk for large pad ø31 #600	

50° Angle Attachment

Code No. **1014** Model **KC-300**

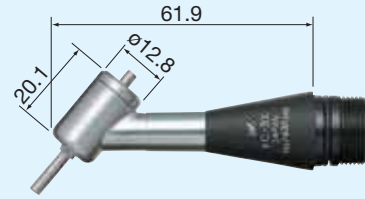

30,000 min⁻¹ Max.
Please use it with **Speed Reducer**.

- Perfect for finishing bottom surfaces and other tight, hard to reach areas.
 - Suitable for polishing a flat surface at speed with a grinding disk pad.
 - Speed Reduction Ratio : 3/4
- Use the motor in reverse rotation for clockwise rotation.



◆ Weight : 45 g

Standard Size Collet

ø3.0 mm (CHC-3.0)

Optional Collets : CHC group are shown in page (P.55)

Standard Accessories

- Chuck Wrench (K-231) : 1 pc.
- Pin Spanner (K-233) : 1 pc.
- Standard Accessories : 1 set


Standard Accessories

Code No.	Description	Package
64101	Rubber Pad (Small) O.D. ø10 mm	1 pc./pack
64102	Rubber Pad (Med) O.D. ø20 mm	
64103	Rubber Pad (Large) O.D. ø30 mm	
64133	Sand Paper Disk for small pad ø11 #180	5 pcs./pack
64137	Sand Paper Disk for small pad ø11 #600	
64153	Sand Paper Disk for med. pad ø21 #180	
64157	Sand Paper Disk for med. pad ø21 #600	
64173	Sand Paper Disk for large pad ø31 #180	
64177	Sand Paper Disk for large pad ø31 #600	

MINI-LUSTER Attachment (Pencil-Type Reciprocating Polishing Finisher)

Code No. **1307** Model **ML-8** Stroke (0.8 mm)

Reciprocating motion

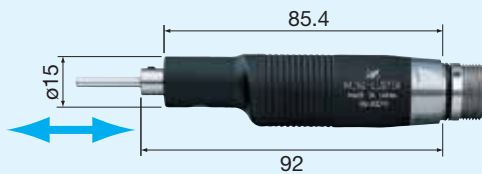

25,000 min⁻¹ Max.

- Due to pencil type grip, it is most suitable for polishing narrow grooves, details, etc.
- Stroke Range (Fixed) : 0.8 mm
- Reciprocating Stroke (Variable) : 0~6,380 times/min.



◆ Weight : 130 g

◆ Max. tool shank diameter ø3.2 mm, Screw clamp type

Standard Accessories

- Allen Wrench (1.5 mm) : 1 pc.
- Standard Accessories : 1 set

Exclusive Tools P.67 ~ 69

Standard Accessories

Code No.	Description	Package
62751	Spring Holder	1 pc./pack
62510	Ceramic Fiber Grindstone Holder	
62814	Electroplated Diamond File 1.2 x 4 x 50 #100	
60737	Ceramic Fiber Grindstone 1 x 6 x 50 #1200	

LUSTER Attachment (Pistol-Type Polisher)

Code No. **1302** Model **LS-100**

Reciprocating motion



25,000 min⁻¹ Max.

- High performance grinding & polishing with high power and reciprocating stroke.
- Well-balanced, rubber-grip absorbs vibration.
- Stroke Range : 0~6 mm (variable)
- Reciprocating Stroke (variable) : 0~6,300 times/min.



◆ Weight : 680 g

◆ Max. tool shank diameter ø6.4 mm, Screw clamp type

Standard Accessories

- Allen Wrench (2 mm), (3 mm) : 1 pc. each
- Lubricating Oil • Lubrication Nozzle for LUSTER
- Standard Accessories : 1 set


Exclusive Tools P.67 ~ 69

Standard Accessories

Code No.	Description	Package
62502	Stone Holder	1 pc./pack
62505	Stone Holder	
62751	Spring Holder	
62525	Rectangular Pad	
62526	Rod for Rectangular Pad	10 pcs./pack
62527	Angle Rod	
62552	Sand Paper Tip #120	
62555	Sand Paper Tip #320	
62557	Sand Paper Tip #600	
62559	Sand Paper Tip #1000	

FINE BELT SANDER Attachment

Code No. **1146** Model **KBS-101**

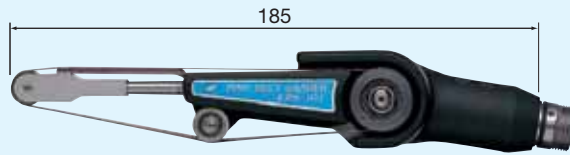

30,000 min⁻¹ Max.

- Very high belt speed, ideal for applications from deburring to finishing.
- The angle of the belt section is fully adjustable.



- ◆ Belt Speed : 0~705 m/min.
- ◆ Weight : 350 g
- ◆ Belt Sizes : 4, 6, 8 mm Widex300mm long

Standard Accessories

- Allen Wrench (3 mm) : 1 pc.
- Standard Accessories : 1 set

Exclusive Tools P.72 ~ 73

Standard Accessories

Code No.	Description	Package
64902	Abrasive Belt Width 4mm #120	2 pcs. each
64904	Abrasive Belt Width 4mm #240	
64906	Abrasive Belt Width 4mm #400	
64912	Abrasive Belt Width 6mm #120	
64914	Abrasive Belt Width 6mm #240	
64916	Abrasive Belt Width 6mm #400	
64922	Abrasive Belt Width 8mm #120	
64924	Abrasive Belt Width 8mm #240	
64926	Abrasive Belt Width 8mm #400	

Air Line Kit

Code No. **4507** Model **AL-H1207F**



300(W) x 120(D) x 220(H) mm

This air line kit is designed for use with the AFC-45 foot controller, Code No.1064.

- Ensures a smooth operation and long life by supplying stable, conditioned air to the air motor.
- Three functions : air filter, regulator, mist lubricator can also be used to adjust motor speed.


- ◆ Weight : 2.2 kg ◆ Filter Mesh : 5 μm

Standard Accessories

- Air Pressure Gauge • Air Regulator • Air Filter • Lubricator
- Air Control Valve (CV-05) • Piping Hose (K-275) • Lubricating Oil (K-211)

1/4 Speed Reducer

Code No. **1009** Model **RG-01**



30,000 min⁻¹ Max.

- Mounted between an attachment and a motor.
- The speed is reduced to 1/4 but the torque is multiplied by 4 times.
- Suitable for high torque grinding process or drilling. ◆ Weight : 68 g

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

Foot Controller

Code No. **1064** Model **AFC-45**




This foot controller is necessary for use with the AL-H1207F air line kit.

- Designed to depress from any direction.
- Fine adjustment of speed control is possible.

1/15 Speed Reducer

Code No. **1010** Model **RG-02**



30,000 min⁻¹ Max.

- Mounted between an attachment and a motor.
- The speed is reduced to 1/15 but the torque is multiplied by 15 times.
- Suitable for high torque grinding process or drilling.
- ◆ Weight : 93 g

Standard Accessories

- Pin Spanner (K-233) : 1 pc.

Extension Joint

Code No. **1015** Model **CN-01**



35,000 min⁻¹ Max.

- Speed Ratio 1 : 1
- This is a joint to be connected between a motor and an attachment to extend the total length of the attachment.

- ◆ Weight : 83 g


Standard Accessories

- Pin Spanner (K-233) : 1 pc.

Precautions for using Nakanishi Tools

For safe use of the tools

- Please read operation manuals before using any tools.
- Please keep all operation manuals on hand for reference whenever necessary.




Caution Incorrect use of the tools, or ignoring 'CAUTIONS for safety' described in the operating manuals, could cause fatal or serious bodily injury.

CAUTIONS



Always use safety glasses, mask, face guard for your safety.



Fasten the collet firmly. Make sure the tool is fully installed in the collet to avoid tool slippage.



Do not touch the tools when in operation. Make sure the work area is neat and there is sufficient light.



Do not use damaged or broken electric cords and air hoses.




Do not use the tool where flammable liquids or gases exist.




Start at low speed and increase gradually to insure safe work. This is particularly important for the use of new tools, large cutting tools and elastic tools such as rubber grindstone, sander and brush tools.



Do not leave operating tools. Confirm that the tool has stopped completely after switching off.




Keep the tools and products in a cool, dry place.



Select proper tools and products for your application. Select tools carefully considering the performance of the tools, work procedure and type/shape of the material.



Check the tools carefully before use. Confirm that the tools are free of chips, cracks, splits, scratches, irregular bondings, and out of round shanks, etc.



Fix the work material firmly in a vise and/or other clamping fixture.



Stop grinding or polishing immediately whenever unusual sounds, vibrations, or wear are found. Restart the work only after the problem is found and corrected.



Do not wear loose clothing and/or accessories that may be caught in machinery. Long hair should be secured prior to machine operation.



Only use attachments, parts, consumable articles and accessories produced by NAKANISHI.



Check all tools carefully before use. Clean the inside of the collet and tool shank, chips or fine metals inside the collet could cause tool slippage and result in damage to machinery or bodily injury.



Do not apply high pressure to or pry with the tools. This can break and/or bend the tools. Use the tools within their design limitation. Excessive pressure will decrease the efficiency of your work and cause excessive wear of the tools.



The tools should be used by taking care of the **overhang and below maximum allowable speed.** The catalogue shows the maximum allowable speed at 13 mm overhang (distance between the face of the collet and the top of the tool shank).

Decrease the speed as shown in the table below, if you are using a longer overhang than 13 mm.

Overhang	Maximum allowable speed (min ⁻¹)
Less than 13 mm	Shown in the catalogue (A)
Less than 20 mm	(A) x 0.5
Less than 25 mm	(A) x 0.3
Less than 50 mm	(A) x 0.1

Electrically Driven

E-max/EVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO I

General Parts

GENERAL
PARTS

CAUTION





Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

Symbols used in NAKANISHI Tools Catalogue

	<p>Shank Diameter Shows shank diameter of the tools. Nakanishi produces tools with several shank diameters. * Nakanishi micro grinders utilize a collet system, which insures maximum precision. Therefore, please use the collet that best corresponds to the tool shank diameter.</p>
	<p>Standard Package One package is the minimum shipping unit. This number shows the number of pieces in the standard package (bag, box and etc.). Please order the number of packages needed for the desired quantity.</p>
	<p>Maximum allowable speed Do not exceed the maximum allowable tool speed. For your safety, use the tools below the indicated allowable speed. Start at low speed and increase gradually to insure safety. The preceding is particularly important for the use of new tools and machines. * Maximum allowable speed assumes an overhang of less than 13mm. Decrease speed if the overhang is more than 13mm. Refer to "Precautions for using Nakanishi Tools" on the next page. * Check the tools and machinery for mechanical defects prior to each use.</p>
	<p>Grit This shows grain size of various grinding tools.</p> <p>Rough Cutting 46, 54, 60, 70, 80, 90 Medium Cutting 100, 120, 150, 180 Pre Finishing 220, 240, 280, 320, 400 Finishing 500, 600, 700, 800, 1000 Fine Finishing and Mirror Polishing 1200, 1500, 1800, 2000, 3000, 4000, 6000, 8000</p>

Code No. **62801~**


NAKANISHI's EXCLUSIVE TOOLS

SHANK 3.0
1 Pcs./pack Electroplated Diamond File

Thickness	t	Grit	Code No.
1.4	0.5 mm	# 200	62801
	0.4 mm	# 400	62802
1.4	0.5 mm	# 200	62805
	0.4 mm	# 400	62806
1.4	0.5 mm	# 600	62803
	0.4 mm	# 600	62807
1.5		# 150	62811
		# 200	62812
		# 400	62813
1.2		# 100	62814
		# 150	62815
1.4		# 200	62816
		# 400	62817
1.5		# 150	62821
		# 200	62822
		# 400	62823
1.8		# 150	62825
		# 200	62826
		# 400	62827

SHANK 3.0
5 Pcs./pack Special Rubber Pad For Abrasive and

Exclusive Tools of "50° & 90° ANGLE"
Special tools for Nakanishi Micro-grinder "Angle Attachment". Highly efficient for grinding, polishing, finishing, etc.

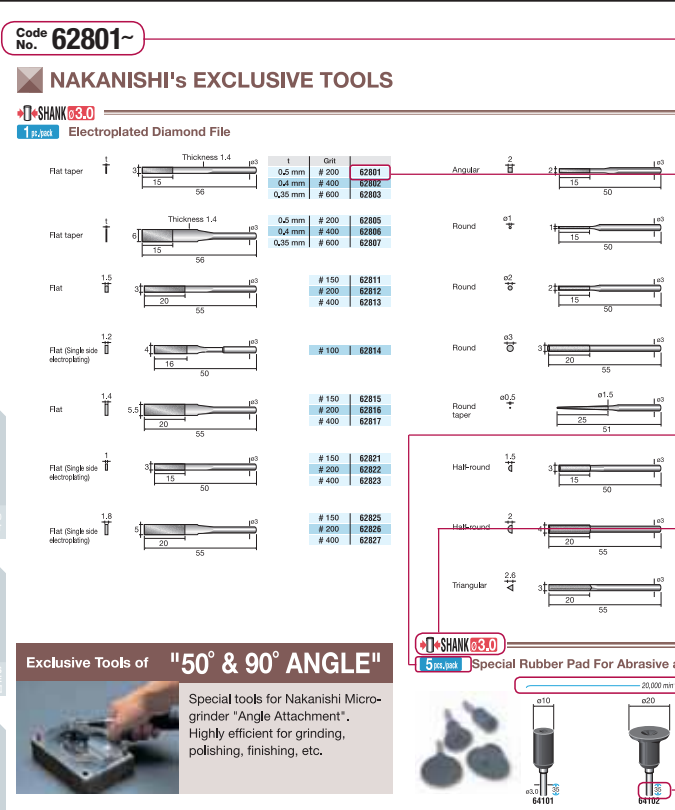

End Code number on each page

Code number (Order number)

Standard package quantity

Shank diameter of the tool

Maximum allowable speed

Total length of the tool (mm)

Note : Specifications may be changed without notice. Colors of the tools in this catalogue may not be the same as actual colors due to printing limitations.

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

NAKANISHI's EXCLUSIVE TOOLS

Exclusive Tools of Electromotive Polisher **"LUSTER", "MINI-LUSTER", "SWING-LUSTER"**





LUSTER

Best for finishing large open work areas.

SHANK $\phi 3.0$

1 pc./pack

Electroplated Diamond File

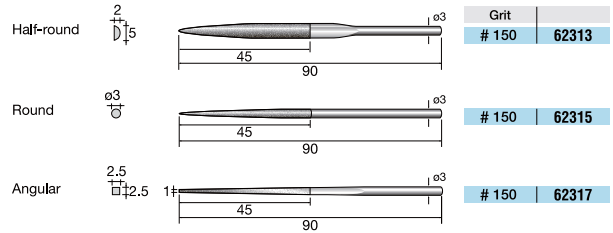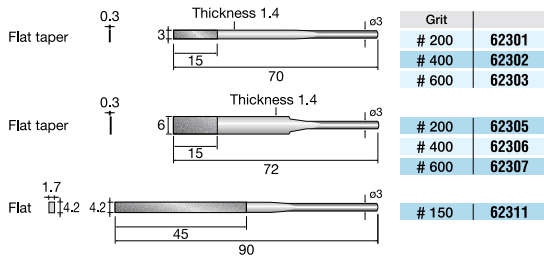

Electrically Driven

EmaxEVO
ESPERT



Air Driven

ROTUS
IMPULSE
PRESTO II

1 pc./pack

Diamond File Flat Type

* Use with stone holder No.62502.

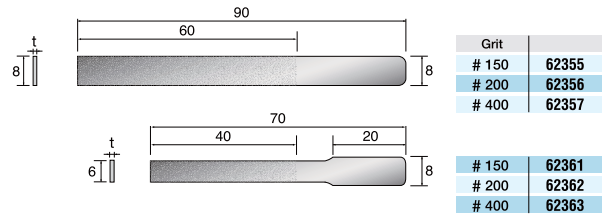

General Parts


GENERAL PARTS

CAUTION


SHANK $\phi 3.0, \phi 3.5$

3 pcs./pack

Precision Finishing Files (Flat, Round, Angular, Triangular, Half-Round)

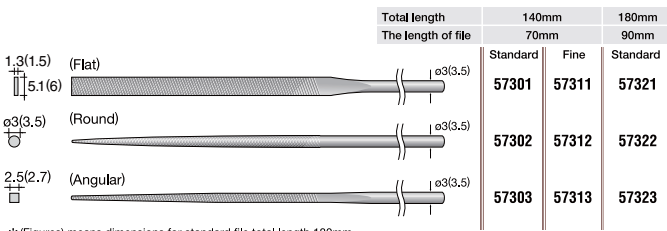

*(Figures) means dimensions for standard file total length 180mm.

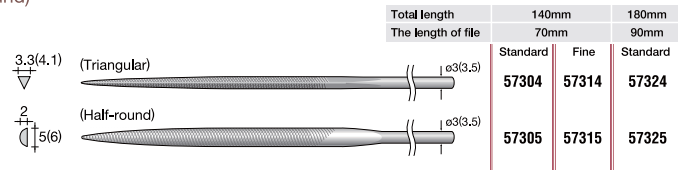

5 files-pack set

- Standard (total length 140mm) set (No.57301~No.57305 : 1pc. each) 57309
- Fine (total length 140mm) set (No.57311~No.57315 : 1pc. each) 57319
- Standard (total length 180mm) set (No.57321~No.57325 : 1pc. each) 57329

Exclusive Tools

EXCLUSIVE TOOLS



INDEX

Protective Equip.

SHANK $\phi 3.0$

3 pcs./pack

Rasps for plastics and wood working (Flat, Round, Angular, Triangular, Half-Round)

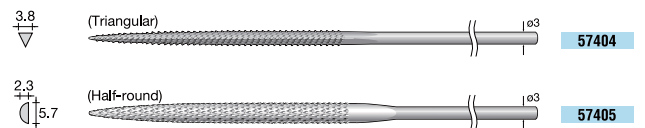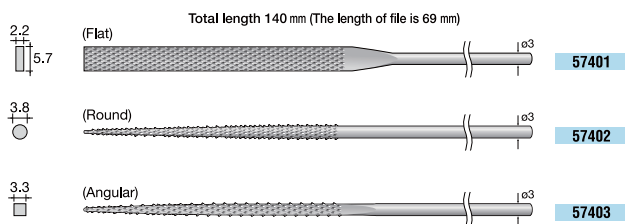


5 files-pack set


- Rasps set for plastics and wood working for plastics and woodworking (No.57401~No.57405 : 1pc. each) 57410

NAKANISHI's EXCLUSIVE TOOLS

1 pc./pack Stone Holder




Maximum clamping thickness
4.5 x Width 11 mm



62502






Maximum clamping thickness
11 x Width 13.5 mm

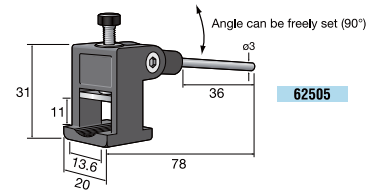

62505

2 pcs./pack Ceramic Fiber Grindstone (Total Length 50 mm)

- Alumina fiber abrasive with the strength and the flexibility for rough or fine finishing.




Grit	Color	W = 4 mm	W = 6 mm
# 180	Ivory	60701	60711
# 300	Brown	60702	60712
# 400	Orange	60703	60713
# 600	Black	60704	60714
# 800	Blue	60705	60715
# 1,000	White	60706	60716
# 1,200	Pink	60707	60717

Grit	Color	W = 4 mm	W = 6 mm	W = 10 mm
# 180	Ivory	60721	60731	62961
# 300	Brown	60722	60732	62962
# 400	Orange	60723	60733	62963
# 600	Black	60724	60734	62964
# 800	Blue	60725	60735	62965
# 1,000	White	60726	60736	62966
# 1,200	Pink	60727	60737	62967


Grit	Color	$\phi 3$ mm
# 180	Ivory	63101
# 300	Red	63102
# 400	Orange	63103
# 600	Black	63104
# 800	Blue	63105
# 1,000	White	63106
# 1,200	Pink	63107

1 pc./pack Ceramic Fiber Grindstone Holder • Grindstone Holder



Maximum clamping thickness 1 x Width 4 mm


62506



Maximum clamping thickness 1 x Width 10 mm


62508

Grindstone Holder




Maximum clamping thickness 3 x Width 6 mm

62509



Maximum clamping thickness 1 x Width 6 mm



62507




Maximum clamping thickness 1 x Width 6 mm

62510

1 pc./pack Flat Holder • Tip for use with abrasive sheets.




62512



62582

1 pc./pack Angular Pad Holder

- Holder for use with abrasive tips for polishing flat surfaces.

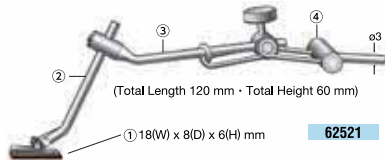

①	62525
②	62526
③	62527
④	62751

62521

Abrasive Tip (For Flat Holder and Angular Pad Holder)


100 pcs./pack Sand Paper Tip



Grit		Grit	
# 120	62552	# 1,000	62559
# 320	62555	# 1,500	62560
# 600	62557		


Adhesive Back

3 pcs./pack Wood Tip Holder



W	
10 mm	62621
15 mm	62622
20 mm	62623

1 pc./pack Spring Holder



* Mountable shaft diameter range $\phi 1 \sim \phi 3.3$ mm

62751

NAKANISHI's EXCLUSIVE TOOLS



1 pc./pack Electroplated Diamond File

Flat taper		t	Grit	
		0.5 mm	# 200	62801
		0.4 mm	# 400	62802
		0.35 mm	# 600	62803
Flat taper		0.5 mm	# 200	62805
		0.4 mm	# 400	62806
		0.35 mm	# 600	62807
Flat		# 150	62811	
		# 200	62812	
		# 400	62813	
Flat (Single side electroplating)		# 100	62814	
Flat		# 150	62815	
		# 200	62816	
		# 400	62817	
*62815 is thickness 1.4mm.				
Flat (Single side electroplating)		# 150	62821	
		# 200	62822	
		# 400	62823	
Flat (Single side electroplating)		# 150	62825	
		# 200	62826	
		# 400	62827	

Angular		Grit	
		# 150	62831
		# 200	62832
		# 400	62833
Round		# 100	62840
		# 150	62841
		# 200	62842
		# 400	62843
Round		# 150	62845
		# 200	62846
		# 400	62847
Round		# 150	62851
		# 200	62852
		# 400	62853
Round taper		# 150	62855
		# 200	62856
		# 400	62857
Half-round		# 150	62865
		# 200	62866
		# 400	62867
Half-round		# 150	62871
		# 200	62872
		# 400	62873
Triangular		# 150	62881
		# 200	62882
		# 400	62883

Electrically Driven

Air Driven

Exclusive Tools of "60° & 90° ANGLE"



Special tools for Nakanishi Micro-grinder "Angle Attachment". Highly efficient for grinding, polishing, finishing, etc.



5 pcs./pack Special Rubber Pad For Abrasive and Felt Disks

20,000 min⁻¹


64101 64102 64103

General Parts

100 pcs./pack Sand Paper Disk

Cloth Type

• For Metals ... Both for dry and wet finishing (Adhesive is resistant to water and oil)




	Grit	ø11	ø21	ø31
For Metals	# 60	64111	64121	64141
	# 80	64112	64122	64142
	# 120	64113	64123	64143
	# 180	64114	64124	64144
	# 240	64115	64125	64145
	# 320	64116	64126	64146
	# 400	64117	64127	64147
	# 600	64118	64128	64148
	# 800	64119	64129	64149
	# 1,000	64120	64130	64150

Adhesive Back

Paper Type

• For Metals ... Both for dry and wet finishing (Adhesive is resistant to water and oil)




	Grit	ø11	ø21	ø31
For Metals (Black)	# 80	64131	64151	64171
	# 120	64132	64152	64172
	# 180	64133	64153	64173
	# 240	64134	64154	64174
	# 320	64135	64155	64175
	# 400	64136	64156	64176
	# 600	64137	64157	64177
	# 800	64138	64158	64178
	# 1,000	64139	64159	64179
	# 1,500	64140	64160	64180

Adhesive Back

Paper Type

• Dry type ... For Metal, Woodwork, Paint, Putty polishing, Dry use



	Grit	ø11	ø21	ø31
For Dry type (White)	# 80	64201	64211	64221
	# 120	64202	64212	64222
	# 180	64203	64213	64223
	# 240	64204	64214	64224
	# 320	64205	64215	64225
	# 400	64206	64216	64226
	# 600	64207	64217	64227

Adhesive Back

Exclusive Tools

EXCLUSIVE TOOLS

INDEX

Protective Equip.

NAKANISHI's EXCLUSIVE TOOLS

100 pcs./pack Zirconium Disk

- Best for finishing aluminum, stainless steel, copper alloy, brass, etc.



Grit	ø11	ø21	ø31
# 60	64251	64261	64271
# 80	64252	64262	64272
# 120	64253	64263	64273
# 150	64254	64264	64274

Adhesive Back

20 pcs./pack Fiber Disk

- Soft finishing can be done on flat & curved surfaces, due to superior flexibility.



Grit	Color	ø11	ø21	ø31
# 120	Brown	64281	64291	64301
# 240	Violet	64282	64292	64302
# 320	Red Brown	64283	64293	64303
# 600	Dark Blue	64284	64294	64304
# 800	Gray	64285	64295	64305
# 1,000	Orange	64286	64296	64306

*Thickness 3 mm

Adhesive Back

20 pcs./pack Felt Disk

- Ideal for finishing using abrasives and diamond compounds.



Description	ø11	ø21	ø31
Soft Type Felt Disk (1mm thickness)	64331	64332	64333
Soft Type Felt Disk (2mm thickness)	64335	64336	64337

Adhesive Back

20 pcs./pack Felt Disk Chromium Oxide (Blue Rouge) Embedded Type.

- Useful for speedy finishing because of Chromium Oxide (Blue Rouge) Embedded.



Description	ø11	ø21	ø31
Felt Disk Chromium Oxide (Blue Rouge) Embedded Type. (2mm thickness)	64341	64342	64343

Adhesive Back

20 pcs./pack Rubber Points Disk

- Best for coarse finishing, pre-finishing with great polishing power.



Grit	Color	ø20	ø30
# 60	Brown	64391	64401
# 80	Red	64392	64402
# 120	Dark Green	64393	64403
# 180	Olive	64394	64404
# 220	Green	64395	64405
# 320	Brown	64396	64406

* Thickness 3 mm

Adhesive Back


SHANK ø3.0

5 pcs./pack Mounted Rubber Disks (Rubber Pad Integration)

- Moderately hard abrasive grain have great polishing ability.



For finishing			
Grit	Color	WA	GC
# 80	Pink	64411	—
# 80	Purple	—	64421
# 120	Blue	64412	64422
# 180	Yellow	64413	—
# 180	Green	—	64423
# 220	Green	64414	64424
# 320	Purple	64415	64425
# 500	Orange	64416	—
# 500	Brown	—	64426




For preliminary finishing (Fast grinding)

Grit	Color	WA
# 80	Black (Red Line)	64431
# 120	Black (Blue Line)	64432

1 pc./pack Diamond Disk (Fully Electroplated Type)

- Superior in sharpness and durability.




Grit	ø11	ø21	ø31
# 100	64451	64461	64471
# 140	64452	64462	64472
# 200	64453	64463	64473
# 280	64454	64464	64474
# 400	64455	64465	64475
# 600	64456	64466	64476
# 800	64457	64467	64477
# 1,000	64458	64468	64478

Adhesive Back

1 pc./pack Diamond Disk (Dot Electroplated Type, Wet Type)

- Electroplated nickel-alloy pellet is strongly adhered to resin base.



Grit	Color	ø11	ø21	ø31
# 60	Green	64501	64511	64521
# 120	Black	64502	64512	64522
# 200	Red	64503	64513	64523
# 400	Yellow	64504	64514	64524
# 800	Gray	64505	64515	64525

Adhesive Back

Electrically Driven

EmaxEVO
ESPRT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL PARTS

CAUTION

Exclusive Tools


EXCLUSIVE TOOLS

INDEX

Protective Equip.

NAKANISHI's EXCLUSIVE TOOLS

3 pcs./pack Resin Bond Diamond Disk
Star Pattern



*Patterns may be changed without notice

Star Pattern	Grit	ø11	ø21	ø31
	# 80	64531	64541	64551
	# 120	64532	64542	64552
	# 180	64533	64543	64553
	# 240	64534	64544	64554
	# 400	64535	64545	64555
	# 600	64536	64546	64556
	# 800	64537	64547	64557
	# 1,000	64538	64548	64558
	# 2,000	64539	64549	64559

Adhesive Back

3 pcs./pack Lapping Film Disk
Diamond Abrasive



Diamond Film (Diamond)	Grit	Color	ø11	ø21	ø31
	# 400	Ivory	64601	64606	64611
	# 800	Ivory	64602	64607	64612
	# 1,500	Ivory	64603	64608	64613
	# 3,000	Ivory	64604	64609	64614

Adhesive Back

50 pcs./pack Lapping Film Disk
WA Abrasive



Random Film (WA)	Grit	Color	ø11	ø21	ø31
	# 320	Pink	64621	64626	64631
	# 600	Green	64622	64627	64632
	# 1,000	Orange	64623	64628	64633
	# 1,500	Olive	64624	64629	64634
	# 3,000	Violet	64625	64630	64635

Adhesive Back

Electrically Driven

Air Driven

General Parts

Exclusive Tools

INDEX

Protective Equip.


SHANK ø3.0

Lap Ring




• Plastic and brass lapping rings for use with abrasive and diamond compounds.

10 pcs./pack Replacement Plastic Ring



64713 64717

5 pcs./pack Replacement Brass Ring




64723 64727

*Do not use the same ring for different abrasive compound grits.


1 pc./pack Replacement Holder

For internal diameter ø6 mm

For internal diameter ø10 mm



64731



64732

Exclusive Tools of "90° MINI ANGLE TYPE ATTACHMENT"



Steel cutters for radius grinding of deep cross holes for "Mini-Angle attachment". Ideal for radius grinding of holes or removing burrs from cross jigs, precision parts and inside surfaces of pipes.




MINI ANGLE TYPE Attachment (Very Small Head)



MINI ANGLE TYPE Attachment


SHANK ø1.6

1 pc./pack Steel Cutters For Deep Cross Hole Finishing




SHANK ø1.6

1 pc./pack Diamond Coated Burs For Deep Cross Hole Finishing

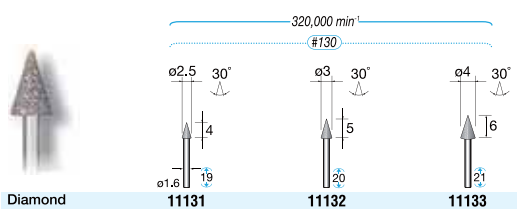

5 pcs./pack Diamond and CBN Coated Burs For Deep Cross Hole Finishing

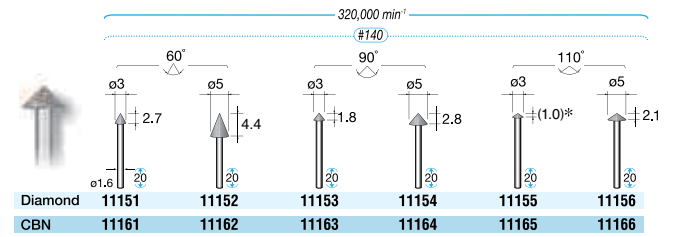


*11165 is Cut Length 1.4mm.

NAKANISHI's EXCLUSIVE TOOLS

Exclusive Tools of "IMPULSE"




Special tools for Nakanishi Micro-grinder "IMPULSE".
Excellent for grinding or polishing flat surfaces, edges with Nakanishi's high-power air grinder.




90° ANGLE IMPULSE
· NA90-230

60° ANGLE IMPULSE
· NA45-230

5 pcs./pack Special Rubber Pad for Disk Abrasives

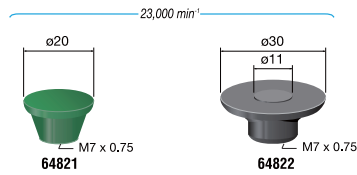


12 pcs./pack Cup Wheel



Grit	Grade Hardness	ø20	ø30
# 36	Standard	64830	64835
# 46	Hard	64831	64836
# 80	Standard	64832	64837
# 80	Hard	—	64838

5 pcs./pack Polishing Sander

• Abrasive Disk for high speed rotation is made from overlapping abrasive cloths.




Grit	
# 80	64842
# 120	64844
# 180	64846
# 240	64847
# 400	64849

• Convenient Assorted set for trial polishing
All grain size (5 types x each 1 pc.)
Total 5 pcs.-pack 64850

10 pcs./pack Rubber Cup Wheel

• Rubber Cup Wheel with high elasticity for grinding & polishing.



Grit	Color		
# 60	Brown	64851	
# 80	Red	64852	
# 120	Blue	64853	
# 180	Olive	64854	
# 220	Green	64855	
# 320	Brown	64856	

• Convenient Assorted set for trial polishing
All grain size (6 types x each 2 pcs.)
Total 12 pcs.-pack 64859

Exclusive Tools of "FINE BELT SANDER"



FINE BELT SANDER Attachment

30 pcs./pack Abrasive Belts

• High Quality Abrasive Belts are superior in grinding & durability.



For Grinding or Polishing of Metals (Length 300 mm)

Grit	W = 4 mm	W = 6 mm	W = 8 mm
# 80	64901	64911	64921
# 120	64902	64912	64922
# 180	64903	64913	64923
# 240	64904	64914	64924
# 320	64905	64915	64925
# 400	64906	64916	64926
# 600	—	—	64927
# 800	—	—	64928

• Assorted set for preliminary finishing (● Mark)
Grain size (4 types x each 10 pcs.), W = 8 mm
Total 40 pcs.-pack 64931

• Assorted set for finishing (● Mark)
Grain size (4 types x each 10 pcs.), W = 8 mm
Total 40 pcs.-pack 64932



For Woodwork (Length 300 mm)

Grit	8 mm Width
# 80	64941
# 120	64942
# 240	64943

• Assorted set for woodwork
All grain size (3 types x each 10 pcs.)
Total 30 pcs.-pack 64955

NAKANISHI's EXCLUSIVE TOOLS

3 pcs./pack Diamond Belt

• For grinding and polishing of Carbide, Hardened steel, Steel, Special steels, Ceramic, FRP, etc.



Hard Type (Length 300 mm)

Grit	8 mm Width
# 80	65011
# 120	65012
# 240	65014
# 320	65015
# 600	65017

• **Assorted set**
 All grain size (5 types x each 1 pc.)
 Total 5 pcs.-pack **65019**



Soft Type (Length 300 mm)

Grit	8 mm Width	Grit	8 mm Width
# 120	65021	# 600	65025
# 180	65022	# 800	65026
# 240	65023	#1,000	65027
# 320	65024		
# 400	65028		

• **Assorted set**
 All grain size (8 types x each 1 pc.)
 Total 8 pcs.-pack **65030**

30 pcs./pack Zirconium Belt

• Best for polishing aluminum, stainless steel, brass



(Length 300 mm)

Grit	8 mm Width
# 80	64971
# 100	64972
# 120	64973

• **Assorted set**
 All grain size (3 types x each 10 pcs.)
 Total 30 pcs.-pack **64975**

Electrically Driven

E-maxEVO
ESPERT

Air Driven

ROTUS
IMPULSE
PRESTO II

General Parts

GENERAL
PARTS

CAUTION

Exclusive Tools

EXCLUSIVE
TOOLS

INDEX

Protective
Equip.

TOOLS & SOLUTIONS

EKA[Co]mmerce - Toolexperience auf neuem Niveau

Website - digitale Informationsplattform

Webshop - B2B-Einkaufsplattform mit vielen Features

EKA-App - mobile Version von Webshop und Website

Newsletter - digitale Informationsübermittlung

Website-Chat - Echtzeit-Interaktion mit Experten

EKA-Toolbox - technische Kalkulationen und Berechnungen



www.klingseisen.de

Kontaktieren Sie

[unser Team:](#)



Brunnenstraße 2 · 78554 Aldingen

Tel. +49 (0)7424 98192-0 · Fax +49 (0)7424 84601 · info@klingseisen.de