



ISCAR TOOLS FOR MACHINING **ALUMINUM**

Metric Catalog



MACHINING IN TELLIGENTLY



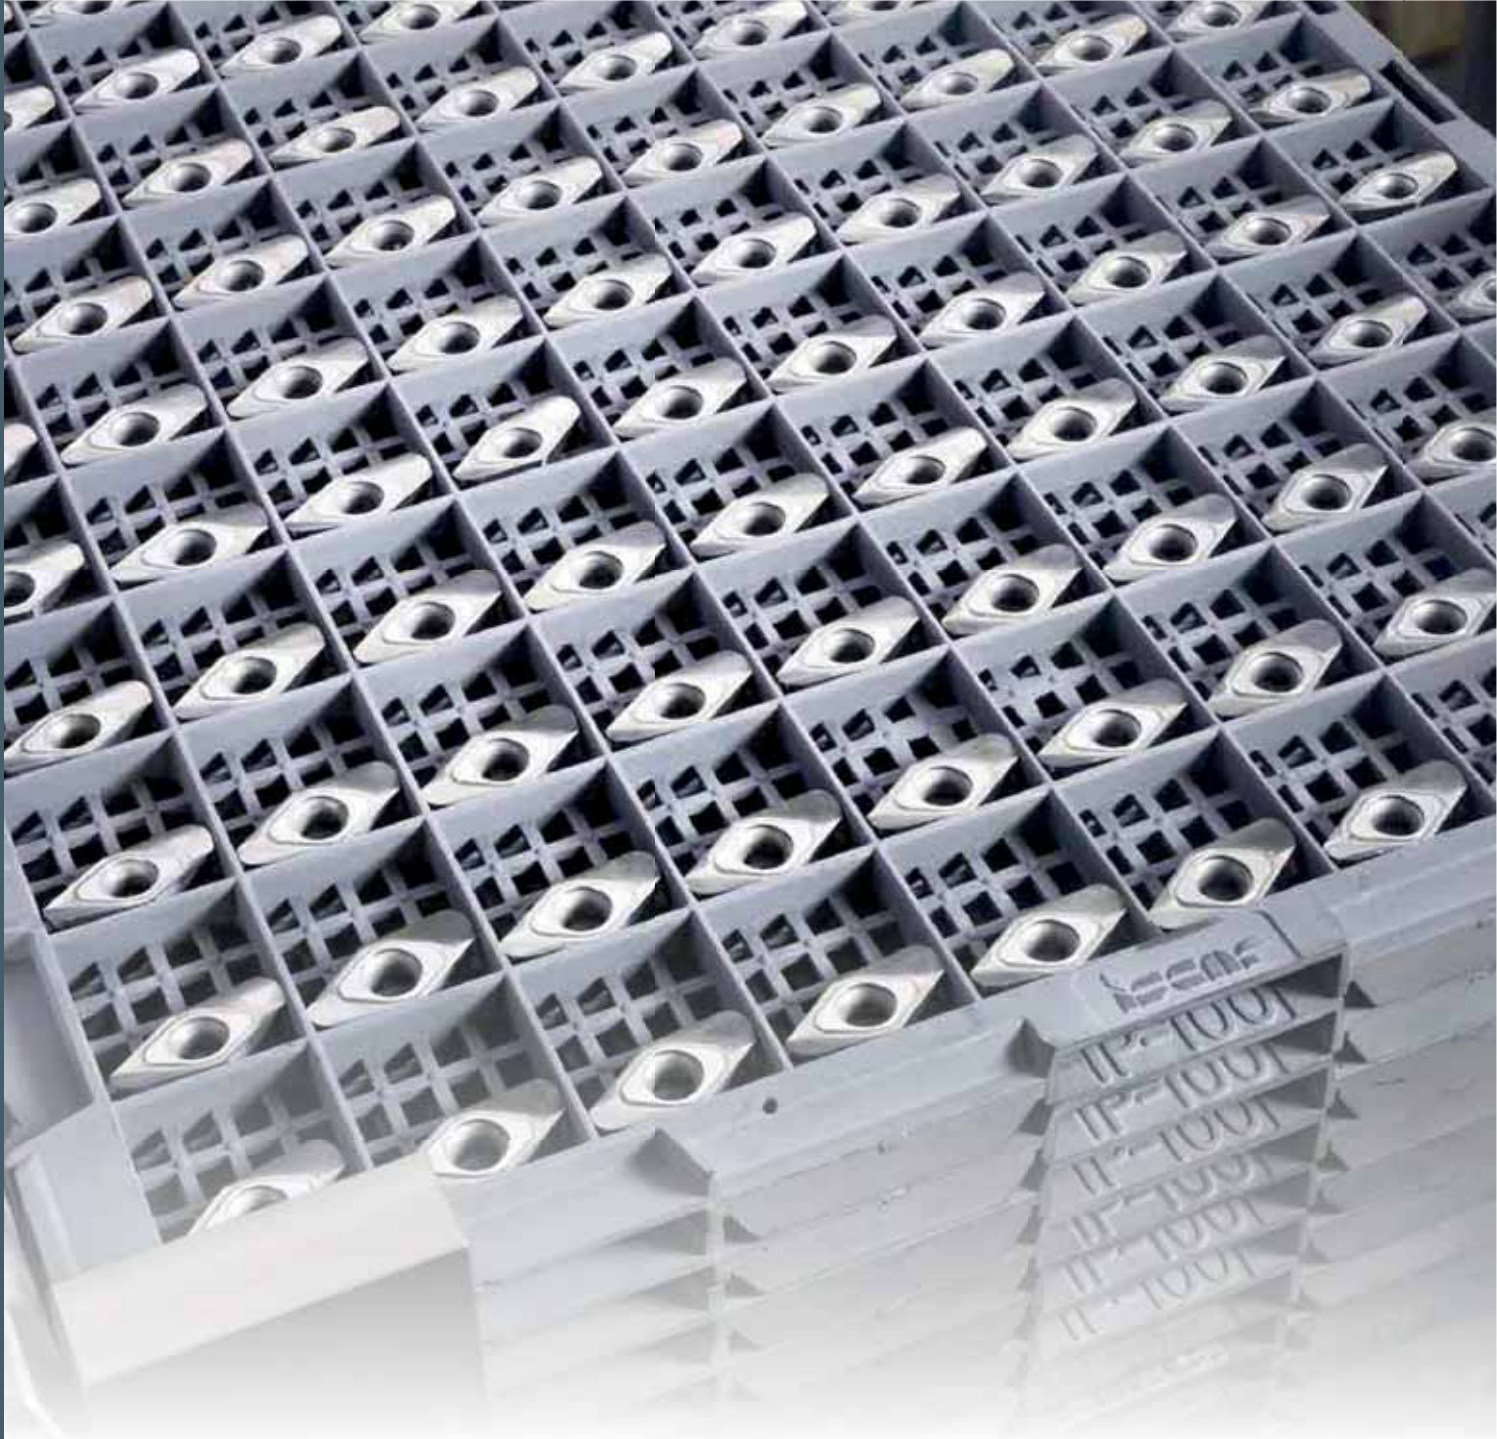

THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL

Quality Standard

ISCAR has been certified by the prestigious Standards Institution, as being in full compliance to ensure delivery of the finest quality goods. Quality control facilities include the metallurgical laboratory, raw metal testing, an online testing procedure and a machining center for tool performance testing and final product inspection. Only the finest products are packaged for entry into ISCAR's inventory.



CONTENTS

| | |
|--|-----------|
| Turning | 3 |
| ISOTURN | 4 |
| Indexable Inserts | 7 |
| PCD Indexable Inserts..... | 27 |
| Groove-Turn - Indexable Inserts | 32 |
| Parting - Indexable Inserts | 36 |
| Tools and Inserts for Machining Aluminum Wheels | 38 |
| Threading | 54 |
| Thread Turning | 55 |
| Thread Milling | 56 |
| Taps | 57 |
| Milling | 80 |
| Indexable Milling Inserts | 81 |
| Multi-Master - Solid Carbide Interchangeable Milling Heads | 92 |
| Solid Carbide Cutters | 96 |
| PCD Endmills | 104 |













| | |
|--|-----|
| Holemaking | 105 |
| Exchangeable Drilling Heads | 106 |
| Indexable Drilling Insert | 111 |
| PCD Indexable Drilling Inserts | 118 |
| Solid Carbide Drills with Brazed PCD Tips | 119 |
| Interchangeable High Precision Reaming Heads | 120 |
| Brazed Polycrystalline Diamond Reamer | 138 |
| ITS Bore Indexable Inserts | 139 |
| Aluminum Machining Applications | 143 |
| Control Valve Mount | 144 |
| Beam Structure | 145 |
| Cylinder Block | 146 |
| Cylinder Head | 148 |
| Aluminum Wheels | 150 |
| Electric Car Motor Housing | 152 |
| Electric Car Battery Case | 154 |
| Technical Information | 155 |
| Index | 164 |






Turning




| | | | |
|----------|----------|----------|----------|
| W | N | M | G |
| 1 | 2 | 3 | 4 |

| | | | | |
|-----------|-----------|-----------|----------|-----------|
| 08 | 04 | 08 | E | GN |
| 5 | 6 | 7 | 8 | 9 |





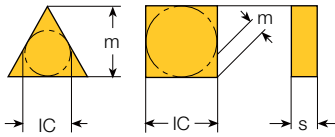


| 1. Shape | | | | |
|----------|---|-----|---|---|
| |  | 75° |  | 80°  |
| 90° |  | 55° |  |  |
| 60° |  | 35° |  | 55°  |
| 80°/100° |  | 25° |  | 80°  |






| 2. Clearance Angle | |
|---|---|
|  |  |
| 0° | 7° |
|  |  |
| 5° | 11° |
|  | |
| Other | |

| 3. Tolerance | | | | |
|---|-------------------------|----------|-----------|----------------------|
|  | | | | |
| | M | S | IC | |
| E | ±0.025 | ±0.025 | | ±0.025 |
| G | ±0.025 | ±0.13 | | ±0.025 |
| M | from ±0.08 | ±0.13 | from | ±0.05 |
| | to ±0.18 ⁽¹⁾ | | to | ±0.13 ⁽¹⁾ |
| U | from ±0.13 | ±0.13 | from | ±0.08 |
| | to ±0.38 ⁽¹⁾ | | to | ±0.25 ⁽¹⁾ |

⁽¹⁾ Exact tolerance depends on insert size


| IC | Tolerance in Mm | | | |
|-------|-----------------|---------|---------|---------|
| | On m | | On IC | |
| | Class M | Class U | Class M | Class U |
| 6.35 | ±0.08 | ±0.13 | ±0.05 | ±0.08 |
| 9.52 | ±0.08 | ±0.13 | ±0.05 | ±0.08 |
| 12.70 | ±0.13 | ±0.20 | ±0.08 | ±0.13 |
| 15.87 | ±0.15 | ±0.27 | ±0.10 | ±0.18 |
| 19.05 | ±0.15 | ±0.27 | ±0.10 | ±0.18 |
| 25.40 | ±0.18 | ±0.38 | ±0.13 | ±0.25 |

| 4. Type | |
|---|--|
|  | A without chipbreaker, with hole |
|  | G chipbreaker on both sides, with hole |
|  | M, S chipbreaker on one side, with hole |
|  | R chipbreaker on one side, without hole |
|  | B, W countersink on one side, with hole |
|  | T, H chipbreaker on one side, with hole and countersink |
|  | P neg./pos. on one or both sides, with hole |
| | Z, X special |

| 5. Cutting Edge Length | | | | | | | | | | |
|------------------------|---|--|---|---|---|----|----|----|-------------------|--|
| |  |  |  |  |  | | | | | |
| | L | L | L | L | L | | | | | |
| IC | Symbol (L) | | | | | | | | | |
| Inch | Mm | C | D | R | S | T | V | W | Q | |
| 5/32 | 3.97 | | 04 | | | 03 | 06 | 06 | 02 ⁽¹⁾ | |
| 7/32 | 5.56 | 05 | | | | 09 | | | | |
| 1/4 | 6.35 | 06 | 07 | | | 11 | 11 | | | |
| 9/32 | 7.15 | | | | | | 12 | | | |
| | 8.00 | | | 08 | | | | | | |
| 3/8 | 9.52 | 09 | 11 | | 09 | 16 | 16 | 06 | 09 | |
| | 10.00 | | | 10 | | | | | | |
| | 12.00 | | | 12 | | | | | | |
| 1/2 | 12.70 | 12 | 15 | | 12 | 22 | 22 | 08 | 12 | |
| 5/8 | 15.88 | 16 | | | 15 | 27 | | | | |
| | 16.00 | | | 16 | | | | | | |
| 3/4 | 19.05 | 19 | | | 19 | 33 | | 13 | | |
| | 20.00 | | | 20 | | | | | | |
| | 25.00 | | | 25 | | | | | | |
| 1 | 25.40 | | | | 25 | | | | | |


⁽¹⁾ WBM 06

6. Thickness







- 01 = 1.59 mm
- T1 = 1.98 mm
- 02 = 2.38 mm
- 03 = 3.18 mm
- T3 = 3.97 mm
- 04 = 4.76 mm
- 06 = 6.35 mm
- 07 = 7.94 mm

7. Corner Radius




- 02 = 0.2 mm
- 04 = 0.4 mm
- 08 = 0.8 mm
- 12 = 1.2 mm
- 16 = 1.6 mm
- 20 = 2.0 mm
- 24 = 2.4 mm

8. Cutting Edge (Optional)



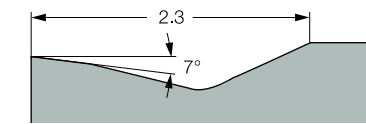

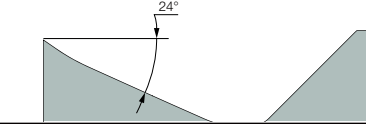

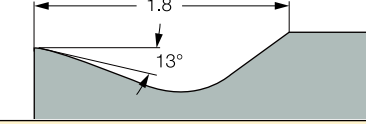

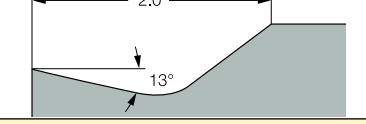

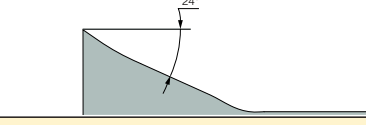

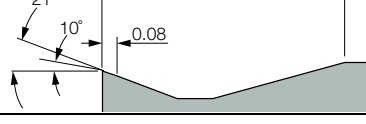

-  F sharp
-  E honed (rounded)
-  T chamfered (negative land)
-  S chamfered + honed

9. Chipformer Designation



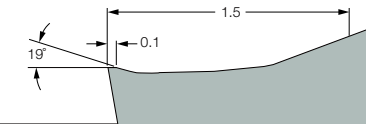

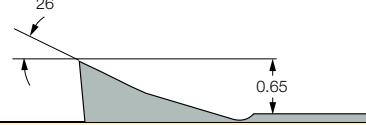

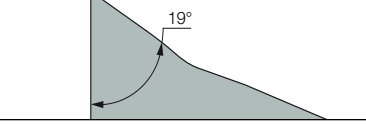

- | | |
|----|----|
| AS | TF |
| NF | PP |
| SM | GN |
| 14 | |

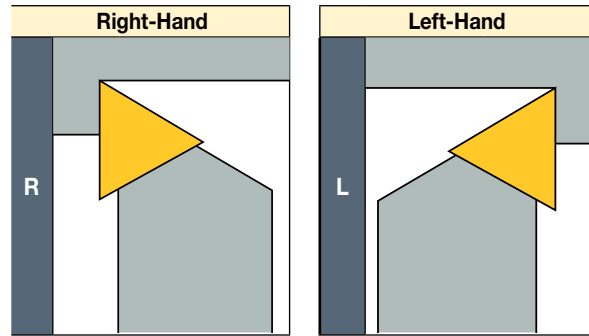

Negative Chipformers
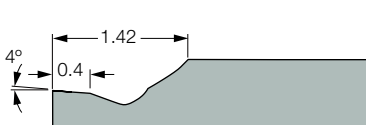
| | | |
|---|---|--|
| NF Chipformer | | |
|  |  | double-sided for semi-finishing and finishing applications. low cutting forces are due to a very sharp edge and positive rake. |
| Gn Chipformer | | |
|  |  | double-sided for general applications. |
| F3n Chipformer | | |
|  |  | polished and extra sharp positive insert for machining aluminum and non-ferrous materials for finishing applications. |
| Tf Chipformer | | |
|  |  | double-sided positive rake angles to prevent strain hardening. the rake angle varies along the edge to a negative angle which prevents chipping. |
| Pp Chipformer | | |
|  |  | double-sided, very positive rake, sharp- and positive radial edge for aluminum alloys. |
| M3n Chipformer | | |
|  |  | polished and extra sharp positive insert for machining aluminum and non-ferrous materials for medium applications. |
| 12 Chipformer | | |
|  |  | single-sided for medium to rough machining on aluminum and soft materials. |


Positive Chipformers
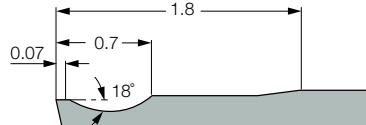
| | | |
|---|---|---|
| SM Chipformer | | |
|  |  | finishing and boring applications. feed range: 0.06-0.25 mm/rev. doc 0.5-2.5 mm. |
| 14 Chipformer | | |
|  |  | semi-finishing and finishing. medium feeds. |
| As Chipformer | | |
|  |  | for general use machining on aluminum and soft materials. |
| R3n Chipformer | | |
|  |  | 35° rhombic, double-sided sharp-edged positive and polished rake inserts. used for rough machining on soft and non-ferrous materials. soft cut and low cutting forces eliminate built-up edge |

Indexable Inserts

ISOTURN

CNMG-GN
Double-Sided 80° Rhombic
Inserts for General Applications

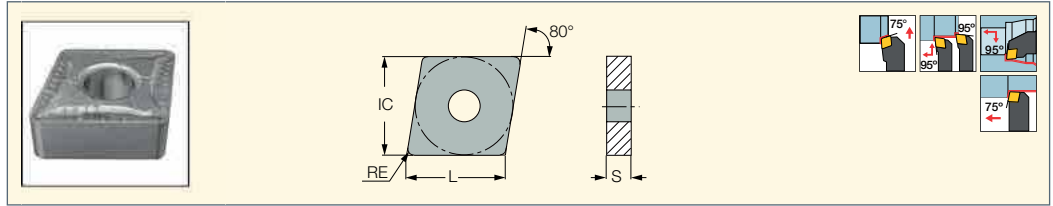


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | | a_p (mm) | f (mm/rev) |
| CNMG 120404-GN | 12.90 | 12.70 | 4.76 | 0.40 | ● | 1.00-4.00 | 0.14-0.40 |
| CNMG 120408-GN | 12.90 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.50 | 0.16-0.45 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

CNMG/CNGG-TF
Double-Sided 80° Rhombic
Inserts for Machining a Wide
Range of Materials under
Medium Cutting Conditions

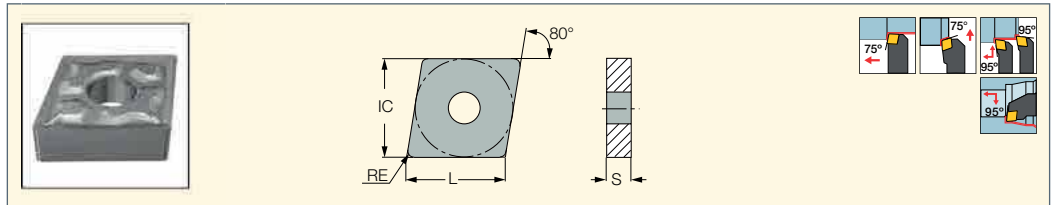


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | | a_p (mm) | f (mm/rev) |
| CNMG 120404-TF | 12.90 | 12.70 | 4.76 | 0.40 | ● | 1.00-4.00 | 0.12-0.35 |
| CNMG 120408-TF | 12.90 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.12-0.35 |
| CNMG 120412-TF | 12.90 | 12.70 | 4.76 | 1.20 | ● | 1.50-4.50 | 0.15-0.40 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

CNMG/CNGG-PP
Double-Sided 80° Rhombic
Inserts for Machining Very
Ductile Materials under
Medium Cutting Conditions

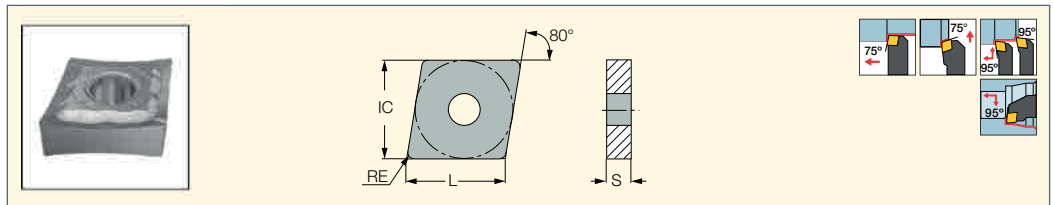


| Designation | Dimensions | | | | Tough ↔ Hard | | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | IC28 | IC10 | a_p (mm) | f (mm/rev) |
| CNMG 120404-PP | 12.90 | 12.70 | 4.76 | 0.40 | ● | ● | 1.00-4.00 | 0.14-0.30 |
| CNMG 120408-PP | 12.90 | 12.70 | 4.76 | 0.80 | ● | ● | 1.00-4.00 | 0.14-0.30 |

• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

CNMS-12
80° Rhombic Single-Sided
Inserts for Soft and
Nonferrous Materials

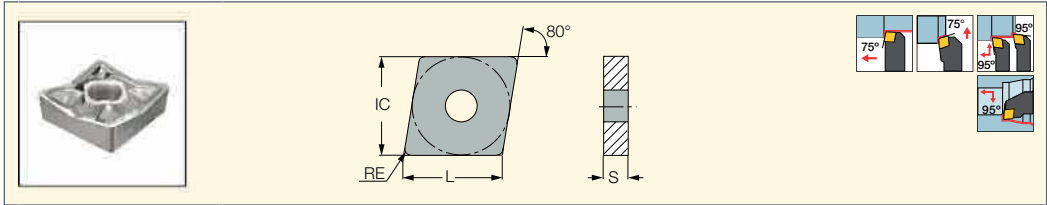


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| CNMS 120408-12 | 12.90 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.10-0.35 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

ALUPTURN
POSITIVE DOUBLE SIDED

CNGG-F3N
Double-Sided Sharp Edged
Positive and Polished Rake
Inserts for Finishing Aluminum
and Other Non-Ferrous Materials

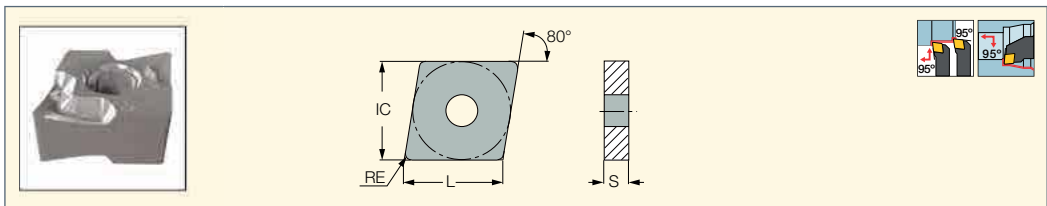


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|--------------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| CNGG 090402-F3N-P | 9.70 | 9.52 | 4.76 | 0.20 | ● | 0.30-3.00 | 0.10-0.30 | |
| CNGG 090404-F3N-P | 9.70 | 9.52 | 4.76 | 0.40 | ● | 0.40-3.00 | 0.10-0.30 | |
| CNGG 090408-F3N-P | 9.70 | 9.52 | 4.76 | 0.80 | ● | 0.80-3.00 | 0.10-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ALUPTURN
POSITIVE DOUBLE SIDED

CNGX-M3N
Double-Sided Positive Rake
Inserts with High Helical and
Sharp Edge for Medium
Machining Non-Ferrous Materials

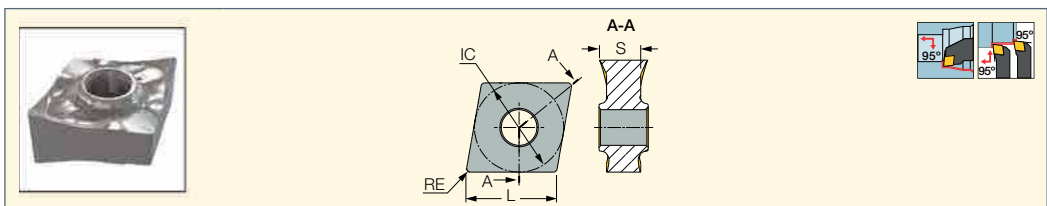


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|--------------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| CNGX 090604-M3N-P | 9.70 | 9.52 | 4.40 | 0.40 | ● | 0.40-3.00 | 0.10-0.30 | |
| CNGX 090608-M3N-P | 9.70 | 9.52 | 4.40 | 0.80 | ● | 0.80-3.00 | 0.10-0.30 | |

• PCLNR/LX and A-PCLNR/LX are most recommended as they were designed especially for this insert
• For user guide and cutting speed recommendations, see pages 4-6,26




WNMG-GN
Double-Sided Trigon Inserts
for General Applications

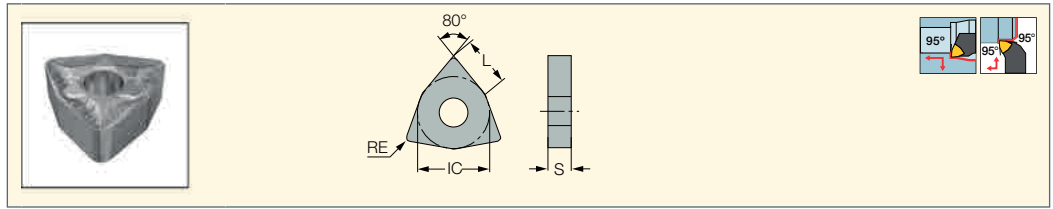

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| WNMG 06T304-GN | 6.52 | 9.52 | 3.97 | 0.40 | ● | 1.00-3.50 | 0.14-0.40 | |
| WNMG 080408-GN | 8.70 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.50 | 0.16-0.45 | |

• For user guide and cutting speed recommendations, see pages 4-6,26


WNMG-TF
Double-Sided Trigon Inserts
for Machining a Wide Range
of Materials under Medium
Cutting Conditions

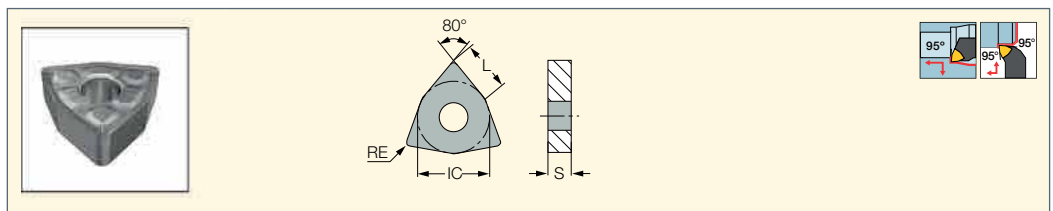

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| WNMG 06T304-TF | 6.52 | 9.52 | 3.97 | 0.40 | ● | 1.00-3.00 | 0.12-0.35 | |
| WNMG 06T308-TF | 6.52 | 9.52 | 3.97 | 0.80 | ● | 1.00-3.00 | 0.12-0.35 | |
| WNMG 080404-TF | 8.70 | 12.70 | 4.76 | 0.40 | ● | 1.00-4.00 | 0.12-0.35 | |
| WNMG 080408-TF | 8.70 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.12-0.35 | |
| WNMG 080412-TF | 8.70 | 12.70 | 4.76 | 1.20 | ● | 1.50-4.50 | 0.15-0.40 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ALUPTURN
POSITIVE DOUBLE SIDED
WNGG-F3N
Double-Sided Sharp Edged
Positive and Polished Rake
Inserts for Finishing Aluminum
and Other Non-Ferrous Materials

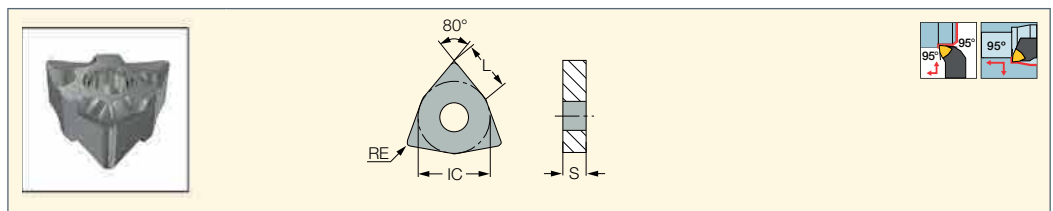

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| WNGG 060402-F3N-P | 6.52 | 9.52 | 4.76 | 0.20 | ● | 0.20-3.00 | 0.10-0.30 | |
| WNGG 060404-F3N-P | 6.52 | 9.52 | 4.76 | 0.40 | ● | 0.40-3.00 | 0.12-0.35 | |
| WNGG 060408-F3N-P | 6.52 | 9.52 | 4.76 | 0.80 | ● | 0.80-3.00 | 0.15-0.40 | |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

WNMG-PP

Double-Sided Trigon Inserts for Machining Very Ductile Materials under Medium Cutting Conditions

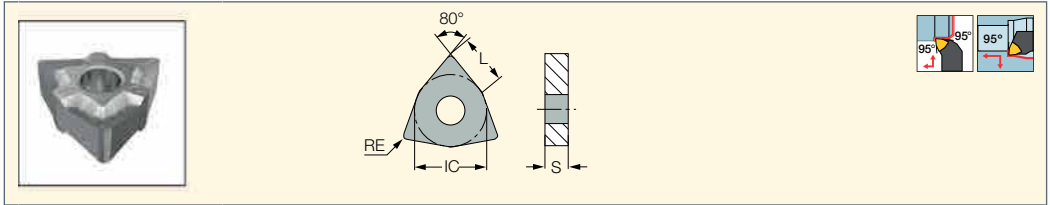


| Designation | Dimensions | | | | Tough ↔ Hard | | | Recommended Machining Data | |
|----------------|------------|-------|------|------|--------------|------|------|----------------------------|------------|
| | L | IC | S | RE | IC28 | IC10 | IC20 | a _p (mm) | f (mm/rev) |
| WNMG 06T304-PP | 6.52 | 9.52 | 3.97 | 0.40 | | ● | | 1.00-3.00 | 0.14-0.30 |
| WNMG 080404-PP | 8.70 | 12.70 | 4.76 | 0.40 | | ● | | 1.00-3.50 | 0.14-0.30 |
| WNMG 080408-PP | 8.70 | 12.70 | 4.76 | 0.80 | ● | ● | | 1.00-4.00 | 0.14-0.30 |
| WNMG 080412-PP | 8.70 | 12.70 | 4.76 | 1.20 | | | ● | 1.50-5.00 | 0.18-0.40 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

WNMG-NF

Double-Sided Trigon Inserts for Semi-Finishing and Finishing Applications

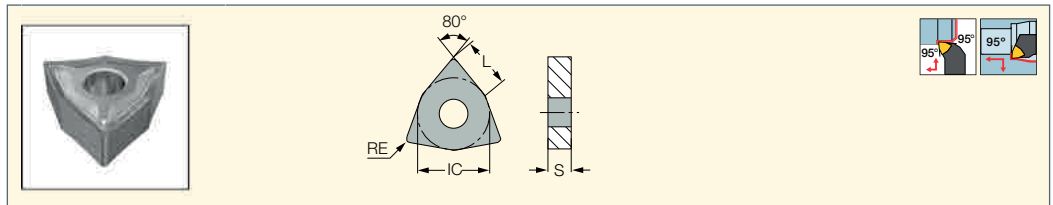


| Designation | Dimensions | | | | Tough ↔ Hard | | Recommended Machining Data | |
|----------------|------------|------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | IC10 | IC20 | a _p (mm) | f (mm/rev) |
| WNMG 06T302-NF | 6.52 | 9.52 | 3.97 | 0.20 | ● | | 0.30-1.50 | 0.08-0.17 |
| WNMG 06T304-NF | 6.52 | 9.52 | 3.97 | 0.40 | ● | ● | 0.40-2.50 | 0.07-0.25 |
| WNMG 06T308-NF | 6.52 | 9.52 | 3.97 | 0.80 | ● | ● | 0.60-3.00 | 0.08-0.25 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

DNMG/DNGG-TF

Double-Sided 55° Rhombic Inserts for Machining a Wide Range of Materials under Medium Cutting Conditions

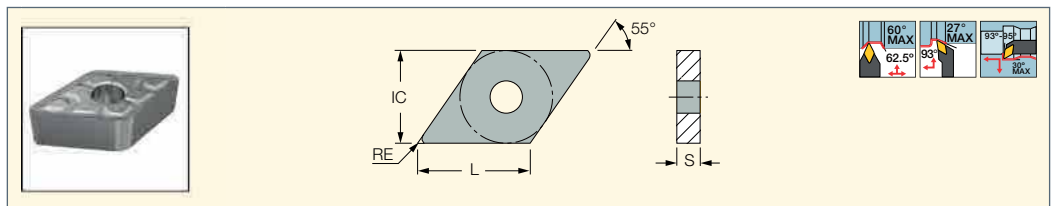


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | | a _p (mm) | f (mm/rev) |
| DNMG 110404-TF | 11.63 | 9.52 | 4.76 | 0.40 | ● | 1.00-3.00 | 0.12-0.30 |
| DNMG 150404-TF | 15.50 | 12.70 | 4.76 | 0.40 | ● | 1.00-3.00 | 0.15-0.30 |
| DNMG 150408-TF | 15.50 | 12.70 | 4.76 | 0.80 | ● | 1.00-3.50 | 0.15-0.30 |
| DNMG 150604-TF | 15.50 | 12.70 | 6.35 | 0.40 | ● | 1.00-3.00 | 0.14-0.30 |
| DNMG 150608-TF | 15.50 | 12.70 | 6.35 | 0.80 | ● | 1.00-3.50 | 0.15-0.30 |
| DNMG 150612-TF | 15.50 | 12.70 | 6.35 | 1.20 | ● | 1.50-4.00 | 0.11-0.35 |

• For user guide and cutting speed recommendations, see pages 4-6,26



DNMS-12
55° Rhombic Single-Sided
Inserts for Soft and
Nonferrous Materials

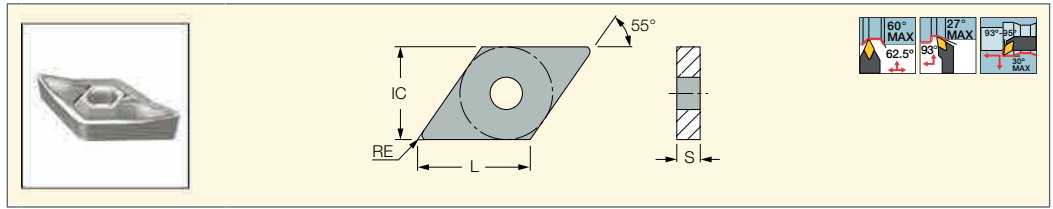


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| DNMS 150408-12 | 15.50 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.07-0.35 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ALUPTURN
POSITIVE DOUBLE SIDED


DNGG-M3N
Double-Sided Sharp-Edged
Positive and Polished Rake
Inserts for Finishing Aluminum
and Other Non-Ferrous Materials

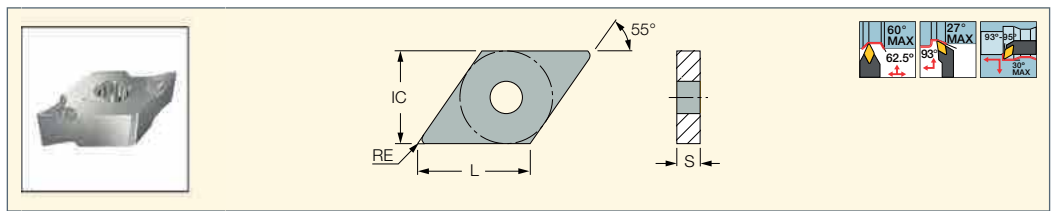

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|--------------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| DNGG 110402-M3N-P | 11.63 | 9.52 | 4.76 | 0.20 | ● | 0.30-3.00 | 0.10-0.30 | |
| DNGG 110404-M3N-P | 11.63 | 9.52 | 4.76 | 0.40 | ● | 0.30-3.00 | 0.10-0.30 | |
| DNGG 110408-M3N-P | 11.63 | 9.52 | 4.76 | 0.80 | ● | 0.30-3.00 | 0.10-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

DNMG/DNGG-PP
55° Double-Sided Rhombic
Inserts for Machining Very
Ductile Materials under
Medium Cutting Conditions

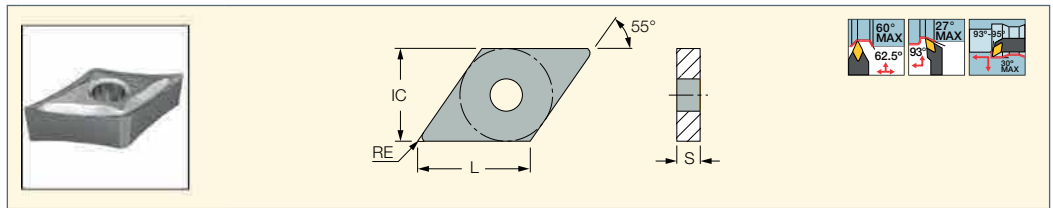

| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------|--------------|------------|----------------------------|--|
| | L | IC | S | RE | IC10 | IC20 | a_p (mm) | f (mm/rev) | |
| DNMG 110404-PP | 11.63 | 9.52 | 4.76 | 0.40 | | ● | 0.40-3.00 | 0.12-0.30 | |
| DNMG 110408-PP | 11.63 | 9.52 | 4.76 | 0.80 | ● | | 1.00-3.50 | 0.12-0.30 | |
| DNMG 150408-PP | 15.50 | 12.70 | 4.76 | 0.80 | | ● | 1.00-4.00 | 0.12-0.30 | |
| DNMG 150608-PP | 15.50 | 12.70 | 6.35 | 0.80 | | ● | 1.00-3.50 | 0.12-0.30 | |



• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

KNUX

55° Parallelogram Profiling Inserts



| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|------------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| KNUX 160405 L11 | 19.72 | 9.52 | 4.76 | 0.50 | ● | 1.00-4.00 | 0.10-0.40 | |
| KNUX 160405 R11 | 19.72 | 9.52 | 4.76 | 0.50 | ● | 1.00-4.00 | 0.10-0.40 | |



• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

ALUPTURN
POSITIVE DOUBLE SIDED

VNGG-M3N

Double-Sided Sharp Edged Positive and Polished Rake Inserts for Finishing on Aluminum and Other Non-Ferrous Materials

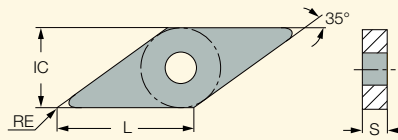



| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|--------------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| VNGG 160402-M3N-P | 16.60 | 9.52 | 4.76 | 0.20 | ● | 0.20-3.00 | 0.10-0.25 | |
| VNGG 160404-M3N-P | 16.60 | 9.52 | 4.76 | 0.40 | ● | 0.40-3.00 | 0.12-0.30 | |
| VNGG 160408-M3N-P | 16.60 | 9.52 | 4.76 | 0.80 | ● | 0.80-3.00 | 0.15-0.35 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

VNMM-PP

Single-Sided 35° Rhombic Inserts for Machining Very Ductile Materials under Medium Cutting Conditions

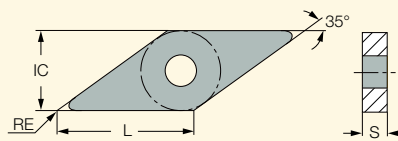

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| VNMM 12T304-PP | 12.40 | 7.15 | 3.97 | 0.40 | ● | 0.80-2.50 | 0.12-0.20 | |
| VNMM 12T308-PP | 12.40 | 7.15 | 3.97 | 0.80 | ● | 1.00-2.50 | 0.12-0.25 | |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

VNMG/VNGG-NF

Double-Sided 35° Rhombic Inserts for Semi-Finishing and Finishing Applications

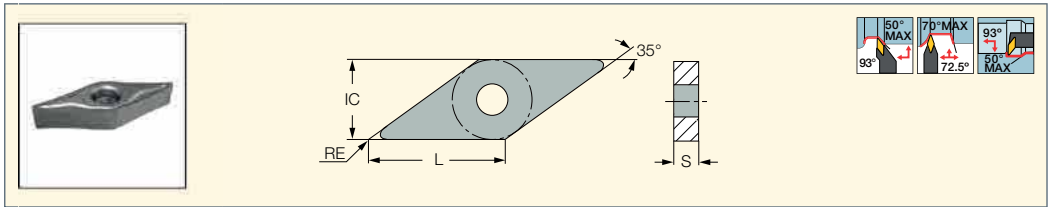


| Designation | Dimensions | | | | Tough ← Hard | | Recommended Machining Data | |
|----------------|------------|------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | IC10 | IC20 | a _p (mm) | f (mm/rev) |
| VNMG 12T302-NF | 12.40 | 7.15 | 3.97 | 0.20 | ● | | 0.40-2.50 | 0.07-0.18 |
| VNMG 12T304-NF | 12.40 | 7.15 | 3.97 | 0.40 | ● | | 0.70-2.00 | 0.07-0.24 |
| VNMG 12T308-NF | 12.40 | 7.15 | 3.97 | 0.80 | ● | | 1.00-3.00 | 0.08-0.24 |
| VNMG 160408-NF | 16.60 | 9.52 | 4.76 | 0.80 | | ● | 1.00-3.00 | 0.08-0.25 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

VNMS-12

35° Rhombic Single-Sided Inserts for Soft and Nonferrous Materials

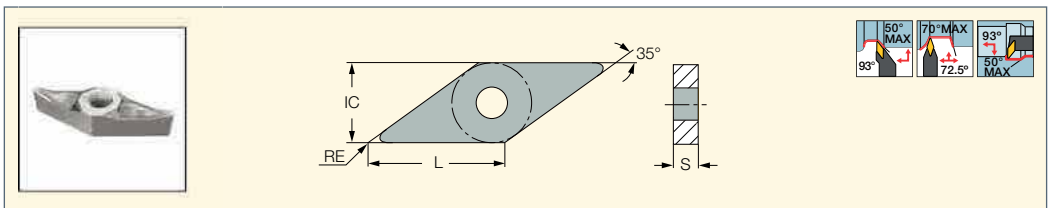

| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | | a _p (mm) | f (mm/rev) |
| VNMS 160404-12 | 16.60 | 9.52 | 4.76 | 0.40 | ● | 1.00-3.00 | 0.07-0.30 |
| VNMS 160408-12 | 16.60 | 9.52 | 4.76 | 0.80 | ● | 1.00-3.50 | 0.07-0.33 |


• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

ALUPTURN
POSITIVE DOUBLE SIDED

VNGU-R3N

Double-Sided Sharp Edged Positive Rake Inserts for Rough Machining Aluminum and Other Non-Ferrous Materials

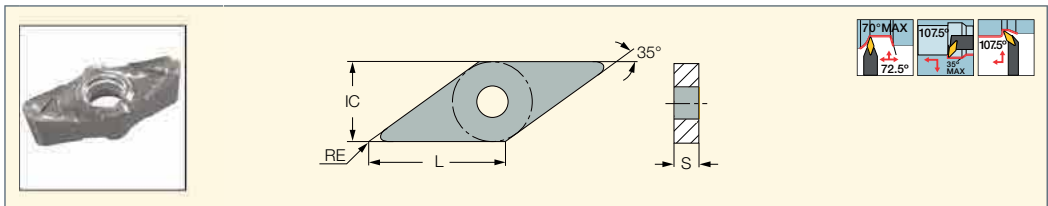

| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|-----------------|------------|-------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | | a _p (mm) | f (mm/rev) |
| VNGU 220612-R3N | 22.00 | 12.70 | 6.77 | 1.20 | ● | 1.00-4.50 | 0.10-0.30 |
| VNGU 220616-R3N | 22.00 | 12.70 | 6.51 | 1.60 | ● | 1.50-4.50 | 0.10-0.35 |
| VNGU 220630-R3N | 22.00 | 12.70 | 6.35 | 3.00 | ● | 1.50-4.50 | 0.15-0.40 |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

TNMG-GN

Double-Sided Triangular Inserts for General Applications

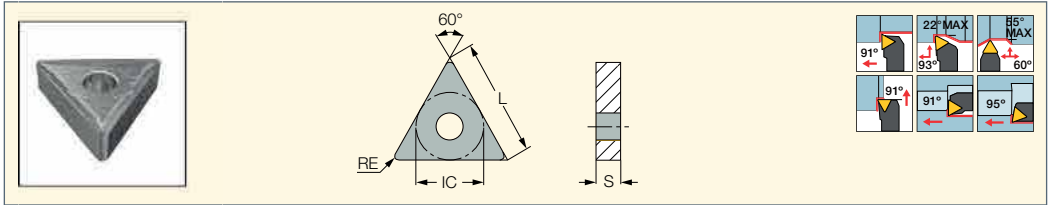


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNMG 160408-GN | 16.50 | 9.52 | 4.76 | 0.80 | ● | 1.00-3.50 | 0.18-0.39 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

TNMG/TNGG-PP

Double-Sided Triangular Inserts for Machining Very Ductile Materials under Medium Cutting Conditions

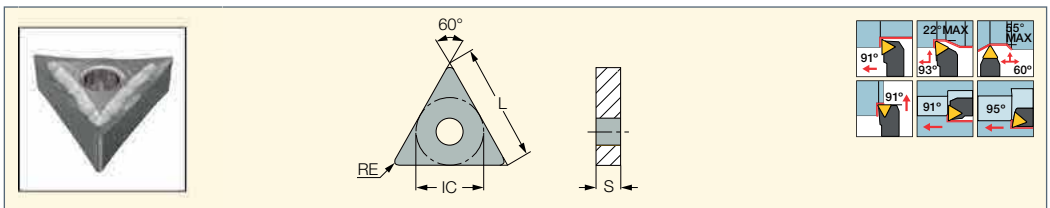


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNMG 160404-PP | 16.50 | 9.52 | 4.76 | 0.40 | ● | 0.50-3.00 | 0.13-0.30 | |
| TNMG 160408-PP | 16.50 | 9.52 | 4.76 | 0.80 | ● | 1.00-3.00 | 0.12-0.30 | |
| TNMG 220408-PP | 22.00 | 12.70 | 4.76 | 0.80 | ● | 1.00-3.50 | 0.14-0.32 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

TNMG-TF

Double-Sided Triangular Inserts for Machining a Wide Range of Materials under Medium Cutting Conditions

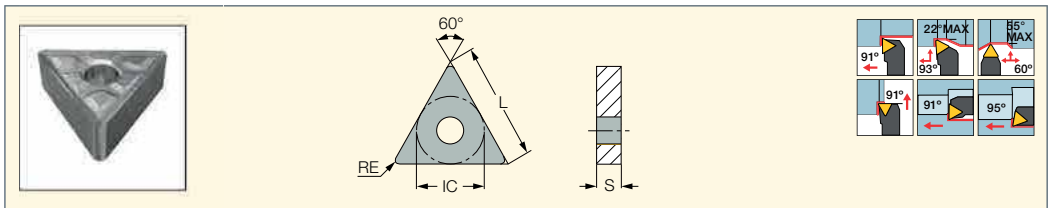


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNMG 160404-TF | 16.50 | 9.52 | 4.76 | 0.40 | ● | 1.00-3.00 | 0.12-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26



TNMA

Double-Sided Triangular Inserts with no Chipformer for Short Chipping Materials

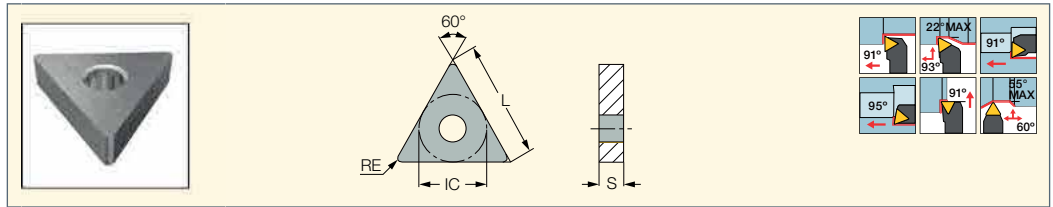


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNMA 160408 | 16.50 | 9.52 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.05-0.25 | |
| TNMA 220408 | 22.00 | 12.70 | 4.76 | 0.80 | ● | 1.50-5.00 | 0.05-0.33 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ALUPTURN
POSITIVE DOUBLE SIDED

TNGG-M3N

Double-Sided Sharp Edged Positive and Polished Rake Inserts for Finishing Aluminum and Other Non-Ferrous Materials

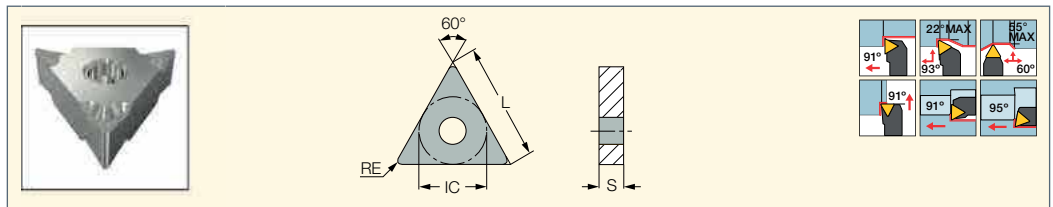


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------------|------------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNGG 160402-M3N-P | 16.50 | 9.52 | 4.76 | 0.20 | ● | 0.30-3.00 | 0.10-0.30 | |
| TNGG 160404-M3N-P | 16.50 | 9.52 | 4.76 | 0.40 | ● | 0.30-3.00 | 0.10-0.30 | |
| TNGG 160408-M3N-P | 16.50 | 9.52 | 4.76 | 0.80 | ● | 0.30-3.00 | 0.10-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

TNMS-12

Triangular Single-Sided Inserts for Soft and Nonferrous Materials

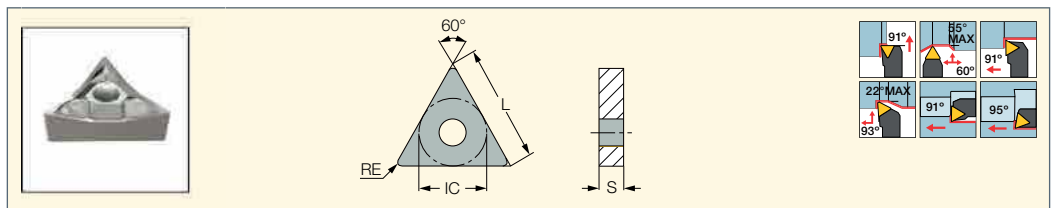


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| TNMS 160404-12 | 16.50 | 9.52 | 4.76 | 0.40 | ● | 0.50-3.00 | 0.07-0.32 | |
| TNMS 160408-12 | 16.50 | 9.52 | 4.76 | 0.80 | ● | 0.50-3.00 | 0.10-0.35 | |
| TNMS 220404-12 | 22.00 | 12.70 | 4.76 | 0.40 | ● | 1.00-4.00 | 0.07-0.32 | |
| TNMS 220408-12 | 22.00 | 12.70 | 4.76 | 0.80 | ● | 1.00-4.00 | 0.10-0.35 | |

• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN**SNMG-TF**

Double-Sided Square Inserts
for Machining a Wide Range
of Materials under Medium
Cutting Conditions

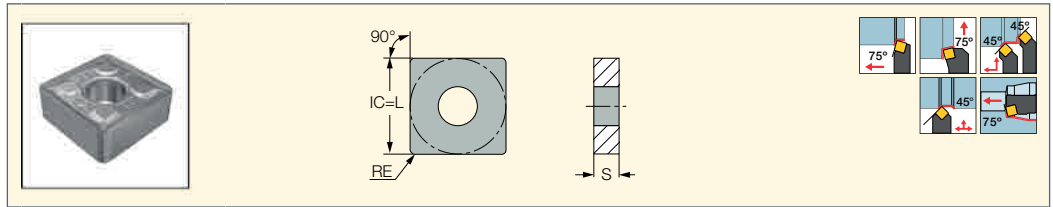


| Designation | Dimensions | | | IC20 | Recommended | Machining Data |
|-----------------------|------------|------|------|------|---------------|----------------|
| | IC | S | RE | | a_p (mm) | f (mm/rev) |
| SNMG 120412-TF | 12.70 | 4.76 | 1.20 | ● | 1.50-4.00 | 0.15-0.40 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN**SNMA**

Double-Sided Square Inserts
Without a Chipformer for
Short Chipping Materials

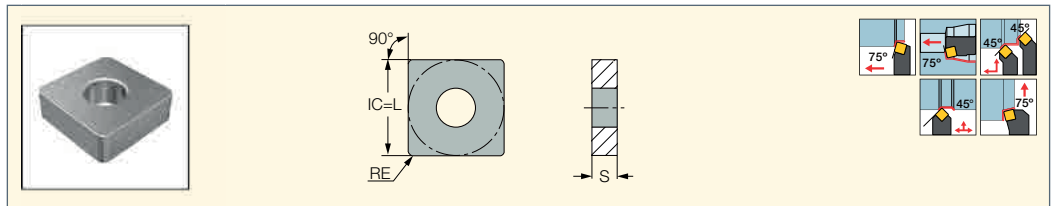


| Designation | Dimensions | | | IC20 | Recommended | Machining Data |
|--------------------|------------|------|------|------|---------------|----------------|
| | IC | S | RE | | a_p (mm) | f (mm/rev) |
| SNMA 120408 | 12.70 | 4.76 | 0.80 | ● | 1.50-5.00 | 0.05-0.50 |
| SNMA 120412 | 12.70 | 4.76 | 1.20 | ● | 1.50-5.00 | 0.10-0.50 |
| SNMA 190612 | 19.05 | 6.35 | 1.20 | ● | 2.00-7.00 | 0.10-0.60 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN**SNMG-GN**

Double-Sided Square Inserts
for General Applications

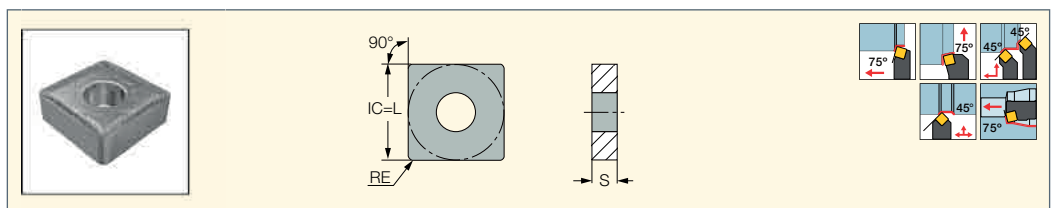


| Designation | Dimensions | | | IC20 | Recommended | Machining Data |
|-----------------------|------------|------|------|------|---------------|----------------|
| | IC | S | RE | | a_p (mm) | f (mm/rev) |
| SNMG 120408-GN | 12.70 | 4.76 | 0.80 | ● | 1.00-5.00 | 0.20-0.45 |
| SNMG 150612-GN | 15.88 | 6.35 | 1.20 | ● | 2.00-7.00 | 0.30-0.60 |

• For user guide and cutting speed recommendations, see pages 4-6,26



Scan the QR code for additional information.
Enter the item description in the search field to access additional related data.

CXGG-M3N-P
CXGG 80° Double-Sided
and Double-Positive
Polished rhombic inserts

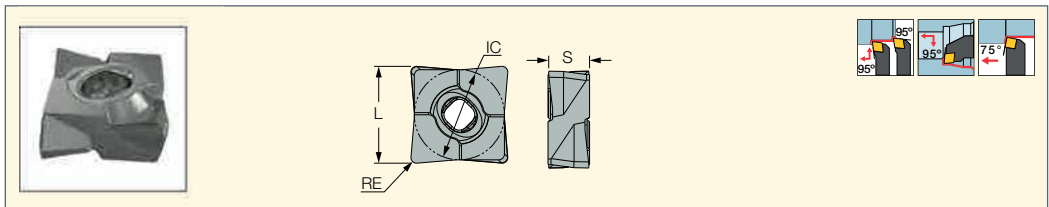


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------------|------------|-------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | a_p (mm) | | f (mm/rev) | |
| CXGG 090404-M3N-P | 10.40 | 9.35 | 4.66 | 0.40 | ● | 0.30-3.00 | 0.10-0.50 | |
| CXGG 090402-M3N-P | 10.44 | 9.35 | 4.66 | 0.20 | ● | 0.15-3.00 | 0.05-0.50 | |
| CXGG 12T508-M3N-P | 13.75 | 12.50 | 5.80 | 0.80 | ● | 0.50-5.00 | 0.15-0.50 | |
| CXGG 12T504-M3N-P | 13.83 | 12.50 | 5.80 | 0.40 | ● | 0.30-5.00 | 0.10-0.50 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

CCMT-14
80° Rhombic Inserts with a 7°
Positive Flank for Semi-Finish
and Finish Turning

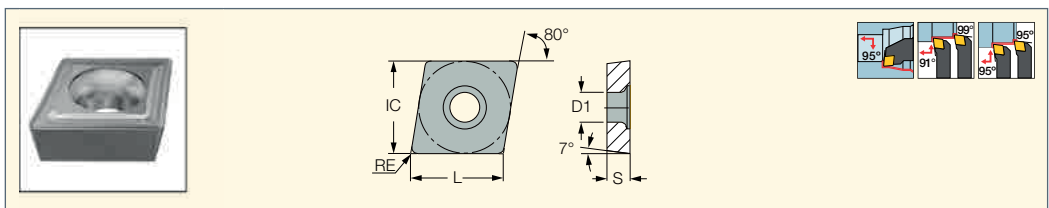


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a_p (mm) | | f (mm/rev) | |
| CCMT 060204-14 | 6.30 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.50-2.50 | 0.14-0.25 | |
| CCMT 09T308-14 | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.14-0.30 | |
| CCMT 120408-14 | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | 0.80-3.00 | 0.14-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

CCGT-AS
80° Rhombic Inserts with a 7°
Positive Flank, Very Positive
Rake Angle and Sharp Cutting
Edge for Machining Aluminum

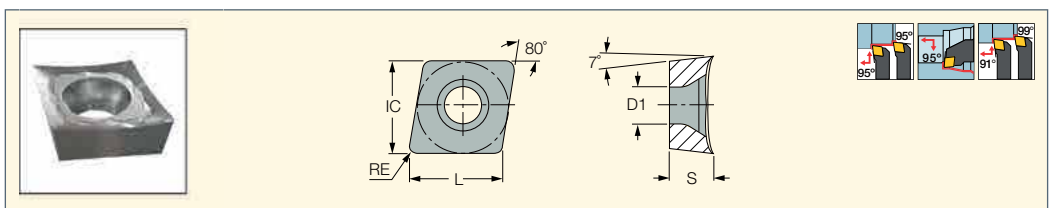

| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a_p (mm) | | f (mm/rev) | |
| CCGT 060201-AS | 6.40 | 6.35 | 2.38 | 0.10 | 2.80 | ● | 0.50-2.00 | 0.10-0.20 | |
| CCGT 060202-AS | 6.40 | 6.35 | 2.38 | 0.20 | 2.80 | ● | 0.50-2.00 | 0.10-0.20 | |
| CCGT 060204-AS | 6.40 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.50-2.00 | 0.10-0.25 | |
| CCGT 09T301-AS | 9.70 | 9.52 | 3.97 | 0.10 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T302-AS | 9.70 | 9.52 | 3.97 | 0.20 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T304-AS | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T308-AS | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.10-0.30 | |
| CCGT 120402-AS | 12.90 | 12.70 | 4.76 | 0.20 | 5.50 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 120404-AS | 12.90 | 12.70 | 4.76 | 0.40 | 5.50 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 120408-AS | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-3.50 | 0.10-0.30 | |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

CCMT/CCGT

80° Rhombic Inserts with a 7° Positive Flank for Semi-Finishing and Finish Turning

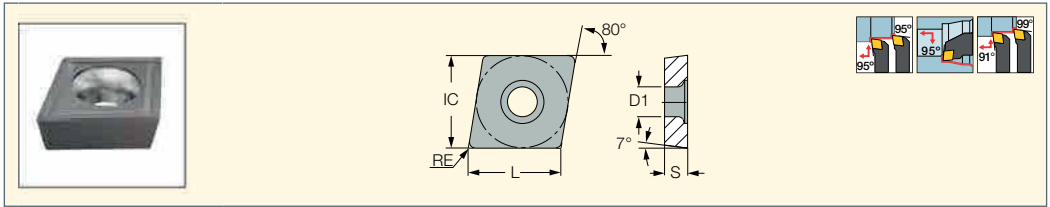


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|------------------------------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| CCGT 060202L ⁽¹⁾ | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | ● | 0.50-2.00 | 0.10-0.20 |

- Use left-hand inserts for left-hand external tools and for right-hand internal tools
- ⁽¹⁾ Left-hand insert

ISOTURN

CCGT-AF

80° Rhombic Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

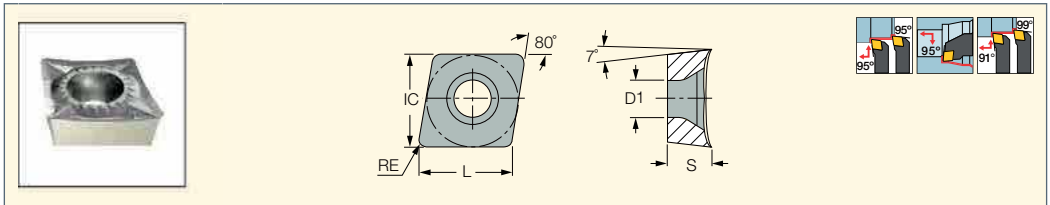


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| CCGT 09T308-AF | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.15-0.25 |
| CCGT 120408-AF | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-3.50 | 0.15-0.30 |

- For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

CCMT/CCGT-SM

Single-Sided Turning Inserts for Semi-Finish and Finishing on Soft Materials and Exotic Alloys

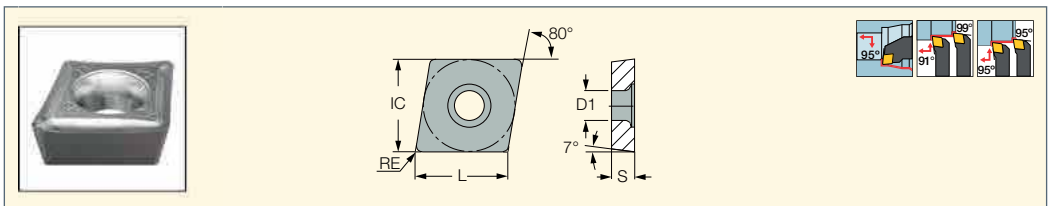


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| CCMT 09T304-SM | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-2.50 | 0.06-0.25 |

- For user guide and cutting speed recommendations, see pages 4-6,26



DCMT-14

55° Rhombic Inserts with a Positive Flank for Semi-Finish and Finish Turning on Soft Materials and Exotic Alloys

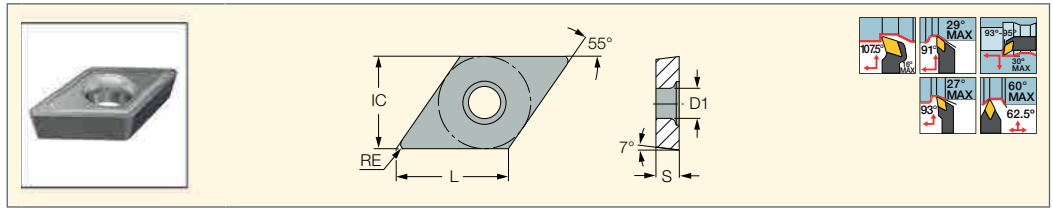


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| DCMT 11T304-14 | 11.60 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 1.00-2.50 | 0.14-0.25 | |
| DCMT 11T308-14 | 11.60 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 1.50-3.00 | 0.14-0.29 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

DCGT-AF

Inserts with a Very Positive Rake Angle and Sharp Cutting Edge for Semi-Finishing and Finishing Aluminum

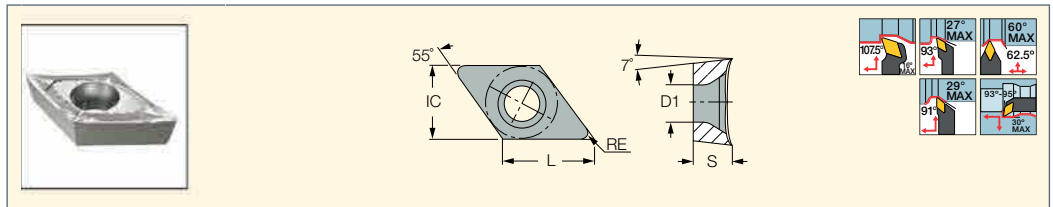


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| DCGT 11T304-AF | 11.60 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-2.50 | 0.05-0.25 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

DCGT-AS

55° Rhombic Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

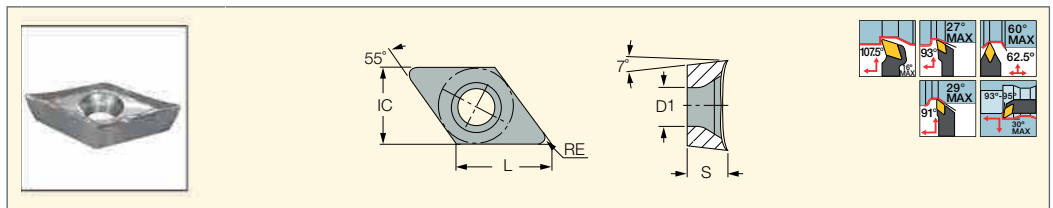

| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| DCGT 070201-AS | 7.75 | 6.35 | 2.38 | 0.10 | 2.80 | ● | 0.50-2.00 | 0.03-0.20 | |
| DCGT 070202-AS | 7.75 | 6.35 | 2.38 | 0.20 | 2.80 | ● | 0.50-2.00 | 0.05-0.20 | |
| DCGT 070204-AS | 7.75 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.50-2.50 | 0.05-0.25 | |
| DCGT 11T301-AS | 11.60 | 9.52 | 3.97 | 0.10 | 4.40 | ● | 0.50-2.50 | 0.05-0.25 | |
| DCGT 11T302-AS | 11.60 | 9.52 | 3.97 | 0.20 | 4.40 | ● | 0.50-2.50 | 0.05-0.26 | |
| DCGT 11T304-AS | 11.60 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-2.50 | 0.05-0.25 | |
| DCGT 11T308-AS | 11.60 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.08-0.30 | |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

VCMT-14

35° Rhombic Inserts with a 7° Positive Flank for Semi-Finish and Finish Turning on Soft Materials and Exotic Alloys

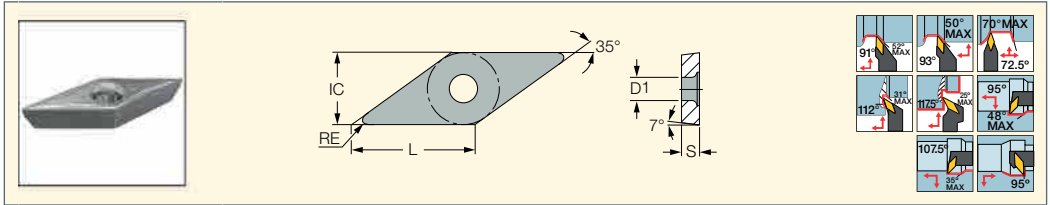


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| VCMT 160404-14 | 16.60 | 9.52 | 4.76 | 0.40 | 4.40 | ● | 1.00-5.00 | 0.12-0.25 |
| VCMT 160408-14 | 16.60 | 9.52 | 4.76 | 0.80 | 4.40 | ● | 1.00-5.00 | 0.12-0.30 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

VCGT-AS

35° Rhombic Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

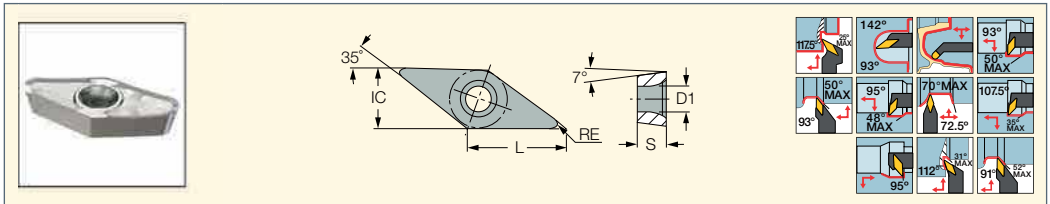


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| VCGT 110302-AS | 11.10 | 6.35 | 3.18 | 0.20 | 2.90 | ● | 0.20-2.50 | 0.05-0.20 |
| VCGT 110304-AS | 11.10 | 6.35 | 3.18 | 0.40 | 2.90 | ● | 0.50-3.00 | 0.05-0.25 |
| VCGT 160401-AS | 16.60 | 9.52 | 4.76 | 0.10 | 4.40 | ● | 0.20-2.50 | 0.05-0.20 |
| VCGT 160402-AS | 16.60 | 9.52 | 4.76 | 0.20 | 4.40 | ● | 0.50-2.50 | 0.05-0.25 |
| VCGT 160404-AS | 16.60 | 9.52 | 4.76 | 0.40 | 4.40 | ● | 0.50-3.00 | 0.05-0.25 |
| VCGT 160408-AS | 16.60 | 9.52 | 4.76 | 0.80 | 4.40 | ● | 0.50-3.00 | 0.10-0.25 |
| VCGT 160412-AS | 16.60 | 9.52 | 4.76 | 1.20 | 4.40 | ● | 0.50-3.00 | 0.10-0.25 |
| VCGT 220530-AS | 22.10 | 12.70 | 5.56 | 3.00 | 5.50 | ● | 1.50-4.50 | 0.15-0.30 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

VCGT-AF

Inserts with a Very Positive Rake Angle and Sharp Cutting Edge for Semi-Finishing and Finishing Aluminum

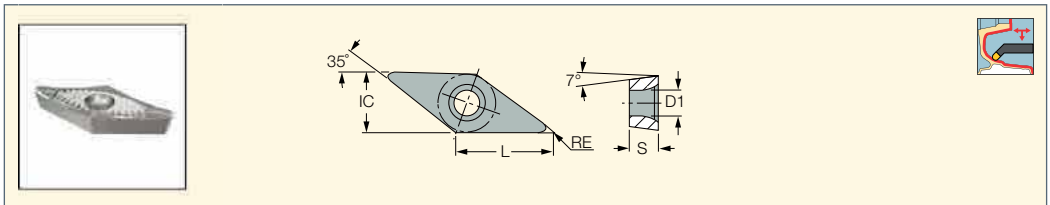


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| VCGT 220508-AF | 22.10 | 12.70 | 5.56 | 0.80 | 5.50 | ● | 1.00-4.50 | 0.10-0.25 |
| VCGT 220512-AF | 22.10 | 12.70 | 5.56 | 1.20 | 5.50 | ● | 1.00-4.50 | 0.10-0.30 |
| VCGT 220516-AF | 22.10 | 12.70 | 5.56 | 1.60 | 5.50 | ● | 1.50-4.50 | 0.10-0.35 |

• For user guide and cutting speed recommendations, see pages 4-6,26



VCMW

35° Rhombic Inserts with a 7° Positive Flank

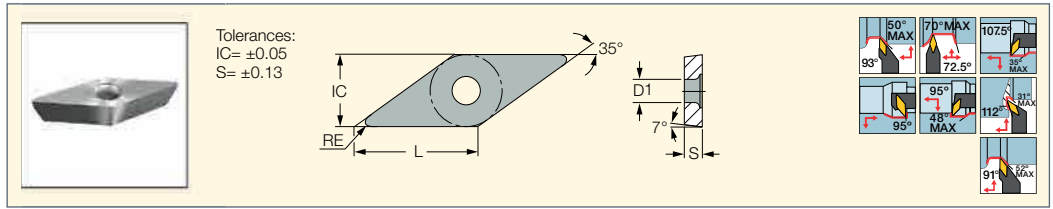


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|--------------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| VCMW 160404 | 16.60 | 9.52 | 4.76 | 0.40 | 4.40 | ● | 0.70-4.00 | 0.05-0.25 |
| VCMW 160408 | 16.60 | 9.52 | 4.76 | 0.80 | 4.40 | ● | 1.00-5.00 | 0.05-0.25 |

• For user guide and cutting speed recommendations, see pages 4-6,26

SCGT-AS

Square Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

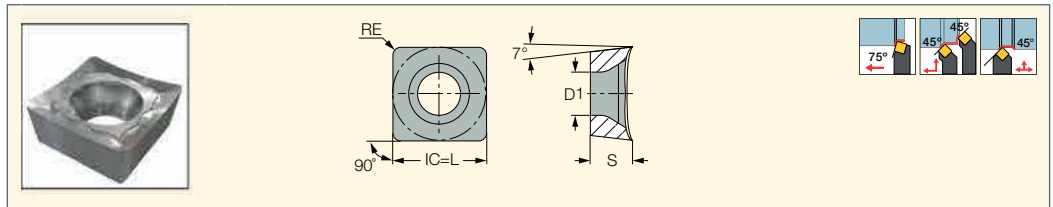


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------|----------------------------|------------|
| | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| SCGT 09T308-AS | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.50-3.00 | 0.10-0.30 |
| SCGT 120404-AS | 12.70 | 4.76 | 0.40 | 5.50 | ● | 1.00-4.00 | 0.10-0.30 |
| SCGT 120408-AS | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-4.00 | 0.10-0.30 |

• For user guide and cutting speed recommendations, see pages 4-6,26

SCMW

Square 7° Positive Flank, Flat Rake Inserts, for Short Chipping Materials

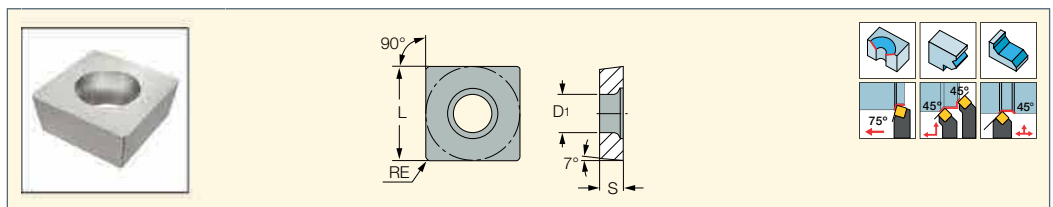


| Designation | Dimensions | | | | IC20 |
|--------------------|------------|------|------|------|------|
| | L | S | RE | D1 | |
| SCMW 09T304 | 9.52 | 3.97 | 0.40 | 4.40 | ● |
| SCMW 120408 | 12.70 | 4.76 | 0.80 | 5.50 | ● |



ISOTURN

TCMT-19

Triangular Inserts with a 7° Positive Flat Rake for Semi-Roughing Applications at Medium to High Feeds

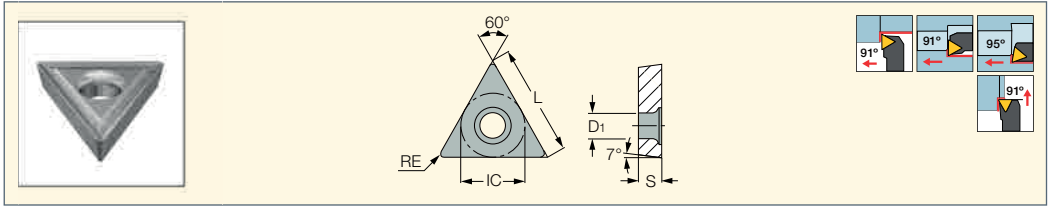


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| TCMT 110204-19 | 11.00 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.50-3.00 | 0.10-0.30 | |
| TCMT 16T308-19 | 16.50 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 1.00-4.00 | 0.20-0.35 | |

ISOTURN

TCGT-AS

Triangular Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

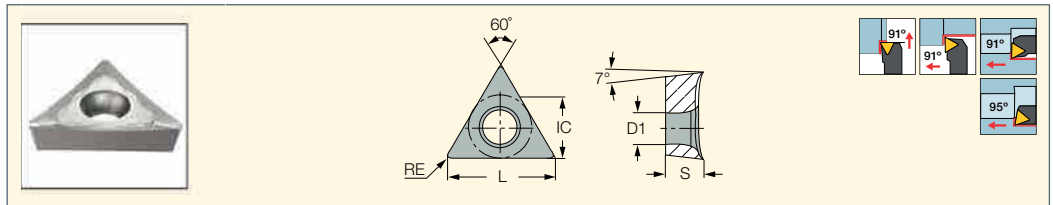


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| TCGT 110204-AS | 11.00 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.20-3.00 | 0.05-0.30 | |
| TCGT 16T304-AS | 16.50 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-3.00 | 0.05-0.30 | |
| TCGT 16T308-AS | 16.50 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.50-3.00 | 0.10-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN

TCMT-14

Triangular 7° Positive Flank Inserts, for Semi-Finish and Finish Turning on Soft Materials and Exotic Alloys

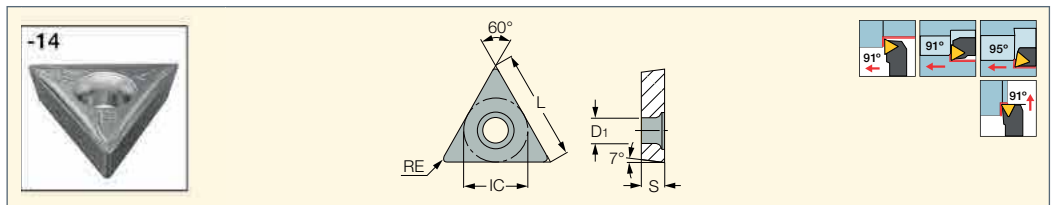


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| TCMT 16T304-14 | 16.50 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 1.00-4.00 | 0.18-0.40 | |

• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN**RCGT-AS**

Round Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

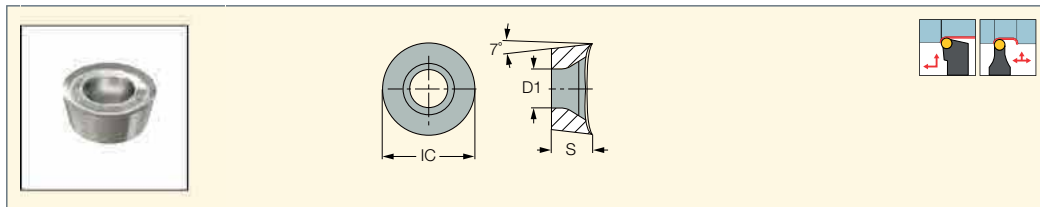


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------------|-----------|----------------------------|--|
| | IC | S | D1 | a_p (mm) | | f (mm/rev) | |
| RCGT 0803M0-AS | 8.00 | 3.18 | 3.40 | ● | 1.00-4.00 | 0.20-0.40 | |
| RCGT 1003M0-AS | 10.00 | 3.18 | 4.00 | ● | 1.00-5.00 | 0.20-0.40 | |
| RCGT 10T3M0-AS | 10.00 | 3.97 | 4.40 | ● | 1.00-5.00 | 0.20-0.40 | |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN**RCMT-14**

Round Inserts with a 7° Positive Flank for Medium and Finish Profiling on a Wide Range of Materials

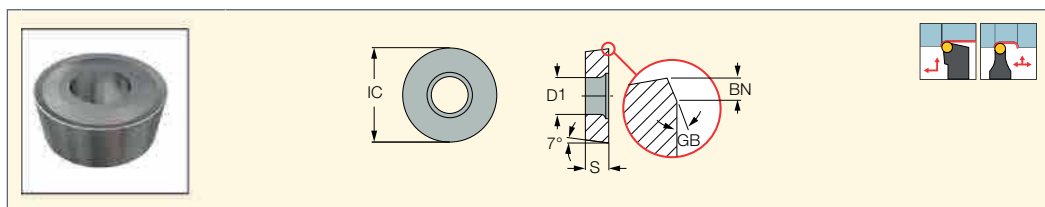


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|------|----------------------------|------------|
| | IC | S | D1 | GB | BN | | a_p (mm) | f (mm/rev) |
| RCMT 0803M0-14 | 8.00 | 3.18 | 3.40 | 15.0 | 0.15 | ● | 1.00-4.00 | 0.30-0.45 |
| RCMT 10T3M0-14 | 10.00 | 3.97 | 4.40 | 15.0 | 0.15 | ● | 1.50-5.00 | 0.30-0.50 |
| RCMT 1204M0-14 | 12.00 | 4.76 | 5.50 | 15.0 | 0.15 | ● | 1.50-6.00 | 0.30-0.50 |
| RCMT 1606M0-14 | 16.00 | 6.35 | 5.50 | 15.0 | 0.25 | ● | 2.00-8.00 | 0.40-0.60 |
| RCMT 2006M0-14 | 20.00 | 6.35 | 6.50 | 15.0 | 0.25 | ● | 2.50-10.00 | 0.50-0.70 |

• For user guide and cutting speed recommendations, see pages 4-6,26

ISOTURN**TPGB**

Triangular Inserts with an 11° Positive Flank for Short Chipping Materials

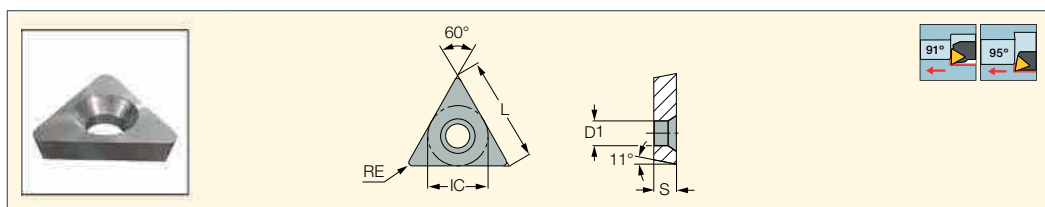

| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a_p (mm) | f (mm/rev) |
| TPGB 110204 | 11.00 | 6.35 | 2.38 | 0.40 | 3.00 | ● | 1.00-3.00 | 0.05-0.25 |


• For user guide and cutting speed recommendations, see pages 4-6,26



ISOTURN

TPGH-R/L

Triangular Inserts with an 11° Positive and Ground Chipformer for Finish Turning

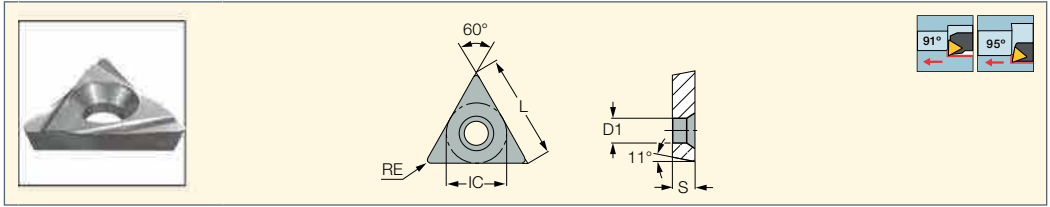


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|---------------|------------|------|------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | IC20 | IC70 | a _p (mm) | f (mm/rev) |
| TPGH 110204-L | 11.00 | 6.35 | 2.38 | 0.40 | 3.00 | ● | ● | 1.00-3.00 | 0.05-0.25 |
| TPGH 160304-L | 16.50 | 9.52 | 3.18 | 0.40 | 4.30 | ● | ● | 1.00-4.00 | 0.05-0.30 |
| TPGH 160304-R | 16.50 | 9.52 | 3.18 | 0.40 | 4.30 | ● | ● | 1.00-4.00 | 0.05-0.30 |
| TPGH 160308-L | 16.50 | 9.52 | 3.18 | 0.80 | 4.30 | ● | ● | 1.00-4.00 | 0.05-0.30 |

- For user guide and cutting speed recommendations, see pages 4-6,26
- First choice grade

ISOTURN

TPGX

Triangular Inserts with an 11° Positive Flank and Ground Chipformer for Finish Turning

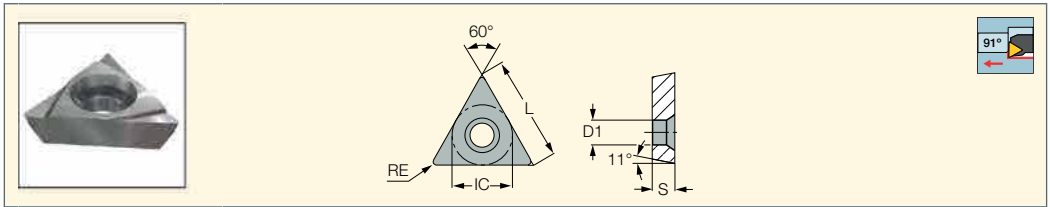


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|---------------|------------|------|------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | IC54 | IC20 | a _p (mm) | f (mm/rev) |
| TPGX 090202-L | 9.52 | 5.56 | 2.38 | 0.20 | 3.00 | ● | ● | 1.00-2.00 | 0.10-0.20 |
| TPGX 090204-L | 9.52 | 5.56 | 2.38 | 0.40 | 3.00 | ● | ● | 1.00-2.50 | 0.15-0.20 |
| TPGX 110302-L | 11.00 | 6.35 | 3.18 | 0.20 | 3.50 | ● | ● | 1.00-2.50 | 0.10-0.20 |
| TPGX 110304-L | 11.00 | 6.35 | 3.18 | 0.40 | 3.50 | ● | ● | 1.00-3.00 | 0.15-0.20 |
| TPGX 110308-L | 11.00 | 6.35 | 3.18 | 0.80 | 3.50 | ● | ● | 1.00-3.50 | 0.15-0.25 |

- For user guide and cutting speed recommendations, see pages 4-6,26
- First choice grade

ISOTURN

TPMT

Triangular 11° Positive Inserts with a Positive Chipformer Exerts Low Cutting Forces for Internal Finish Turning

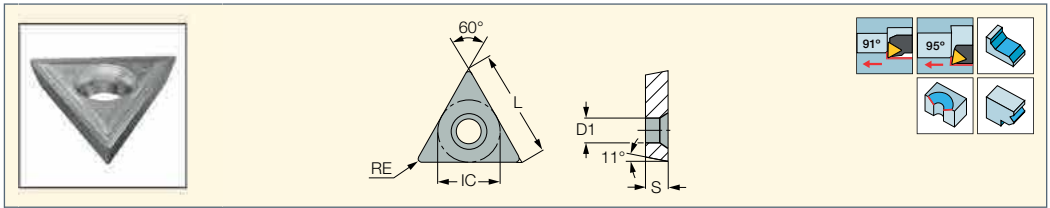

| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|-------------|------------|------|------|------|------|--------------|------|------------------------------------|---------------------------|
| | L | IC | S | RE | D1 | IC20 | IC70 | a _p (mm) ⁽¹⁾ | f (mm/rev) ⁽²⁾ |
| TPMT 110204 | 11.00 | 6.35 | 2.38 | 0.40 | 3.00 | ● | ● | 1.00-3.00 | 0.12-0.30 |
| TPMT 110208 | 11.00 | 6.35 | 2.38 | 0.80 | 3.00 | ● | ● | 1.00-4.00 | 0.15-0.30 |
| TPMT 160304 | 16.50 | 9.52 | 3.18 | 0.40 | 4.30 | ● | ● | 1.00-4.00 | 0.12-0.30 |
| TPMT 160308 | 16.50 | 9.52 | 3.18 | 0.80 | 4.30 | ● | ● | 5.00-12.00 | 0.15-0.35 |

- For cutting speed recommendations, see pages 4-6,26

⁽¹⁾ For turning


⁽²⁾ For turning

- First choice grade



TPGH-XL

Triangular Inserts with an 11° Positive and Ground Chipformer for Finish Turning

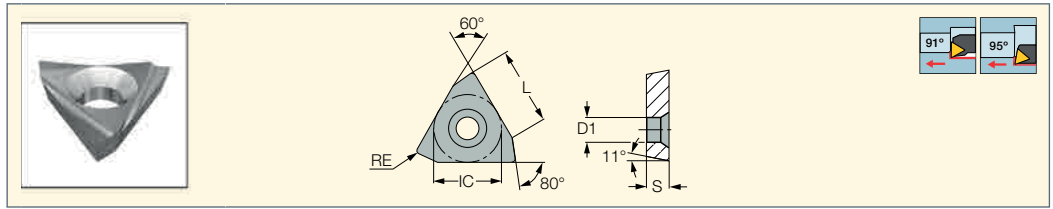


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------|--------------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | IC20 | IC70 | a _p (mm) | f (mm/rev) |
| TPGH 110204-XL | 11.00 | 6.35 | 2.38 | 0.40 | 3.00 | ● | ● | 1.00-3.00 | 0.05-0.25 |

- For user guide and cutting speed recommendations, see pages 4-6,26
- First choice grade

TPGB-XL

Triangular Inserts with an 11° Positive Flank for Short Chipping Materials

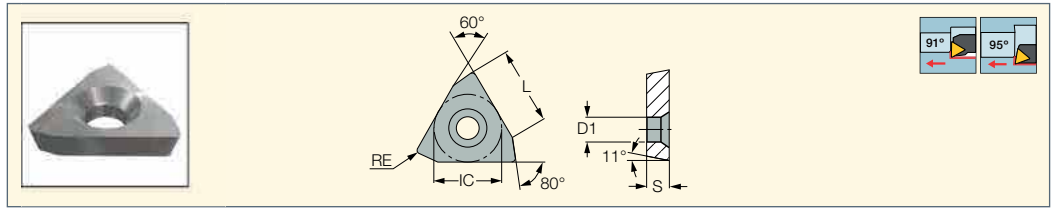


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------|------|----------------------------|------------|
| | L | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| TPGB 110204-XL | 11.00 | 6.35 | 2.38 | 0.40 | 3.00 | ● | 1.00-3.00 | 0.05-0.25 |

- For user guide and cutting speed recommendations, see pages 4-6,26

WPEX

80° and 84° Precision Trigon Inserts with Positive 8° and 12° Clearance for Finishing Applications

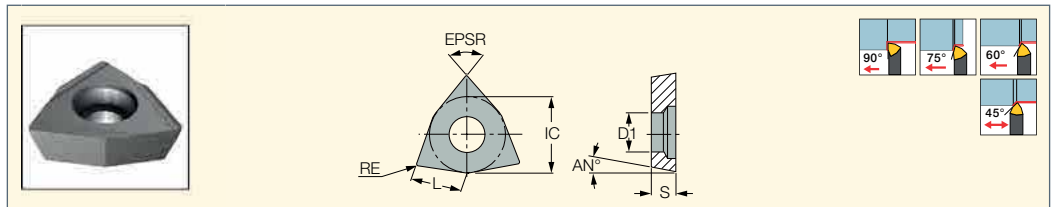


| Designation | Dimensions | | | | | | | IC08 | Recommended Machining Data | |
|-------------------------|------------|------|------|------|------|------|------|------|----------------------------|------------|
| | L | S | RE | IC | D1 | EPSR | AN | | a _p (mm) | f (mm/rev) |
| WPEX 040200R/L08 | 4.00 | 2.50 | 0.00 | 6.60 | 3.20 | 84.0 | 8.0 | ● | 0.20-2.00 | 0.05-0.20 |
| WPEX 040200R12 | 4.00 | 2.50 | 0.00 | 6.60 | 3.20 | 84.0 | 12.0 | ● | 0.20-2.00 | 0.05-0.20 |
| WPEX 040202R/L08 | 4.00 | 2.50 | 0.20 | 6.60 | 3.20 | 84.0 | 8.0 | ● | 0.20-2.00 | 0.05-0.20 |
| WPEX 050300R/L08 | 5.00 | 3.18 | 0.00 | 7.94 | 3.70 | 80.0 | 8.0 | ● | 0.20-2.50 | 0.05-0.20 |
| WPEX 050300R12 | 5.00 | 3.18 | 0.00 | 7.94 | 3.70 | 80.0 | 12.0 | ● | 0.20-2.50 | 0.05-0.20 |
| WPEX 050302R/L08 | 5.00 | 3.18 | 0.20 | 7.94 | 3.70 | 80.0 | 8.0 | ● | 0.20-2.50 | 0.05-0.20 |
| WPEX 050304R/L08 | 5.00 | 3.18 | 0.40 | 7.94 | 3.70 | 80.0 | 8.0 | ● | 0.20-2.50 | 0.05-0.20 |
| WPEX 060400R/L08 | 6.00 | 4.00 | 0.00 | 9.52 | 3.70 | 80.0 | 8.0 | ● | 0.20-3.00 | 0.05-0.20 |
| WPEX 060400R/L12 | 6.00 | 4.00 | 0.00 | 9.52 | 3.70 | 80.0 | 12.0 | ● | 0.20-3.00 | 0.05-0.20 |
| WPEX 060402R/L08 | 6.00 | 4.00 | 0.20 | 9.52 | 3.70 | 80.0 | 8.0 | ● | 0.20-3.00 | 0.05-0.20 |
| WPEX 060402R/L12 | 6.00 | 4.00 | 0.20 | 9.52 | 3.70 | 80.0 | 12.0 | ● | 0.20-3.00 | 0.05-0.20 |
| WPEX 060404R/L08 | 6.00 | 4.00 | 0.40 | 9.52 | 3.70 | 80.0 | 8.0 | ● | 0.20-3.00 | 0.05-0.20 |
| WPEX 060404R12 | 6.00 | 4.00 | 0.40 | 9.52 | 3.70 | 80.0 | 12.0 | ● | 0.20-3.00 | 0.05-0.20 |

- For user guide and cutting speed recommendations, see pages 4-6,26




Machining Data and Speed Recommendations for Turning

| ISO | Material | Condition | Hardness HB | Material No. | Cutting Speed V_c m/min |
|-----|-------------------------|------------------------------|-------------|--------------|------------------------------|
| | aluminum-wrought alloys | not cureable | 60 | 21 | 1000-2500 |
| | | cured | 100 | 22 | 300-1000 |
| N | aluminum-cast alloys | $\leq 12\%$ Si | 75 | 23 | 300-1000 |
| | | cured | 90 | 24 | 200-600 |
| | $> 12\%$ Si | high temp. | 130 | 25 | |
| | $> 1\%$ Pb | free cutting | 110 | 26 | 250-600 |
| Z | copper alloys | brass | 90 | 27 | 180-400 |
| | | electrolytic copper | 100 | 28 | 150-300 |
| | | duroplastics, fiber plastics | | 29 | |
| | non-metallic | hard rubber | | 30 | |

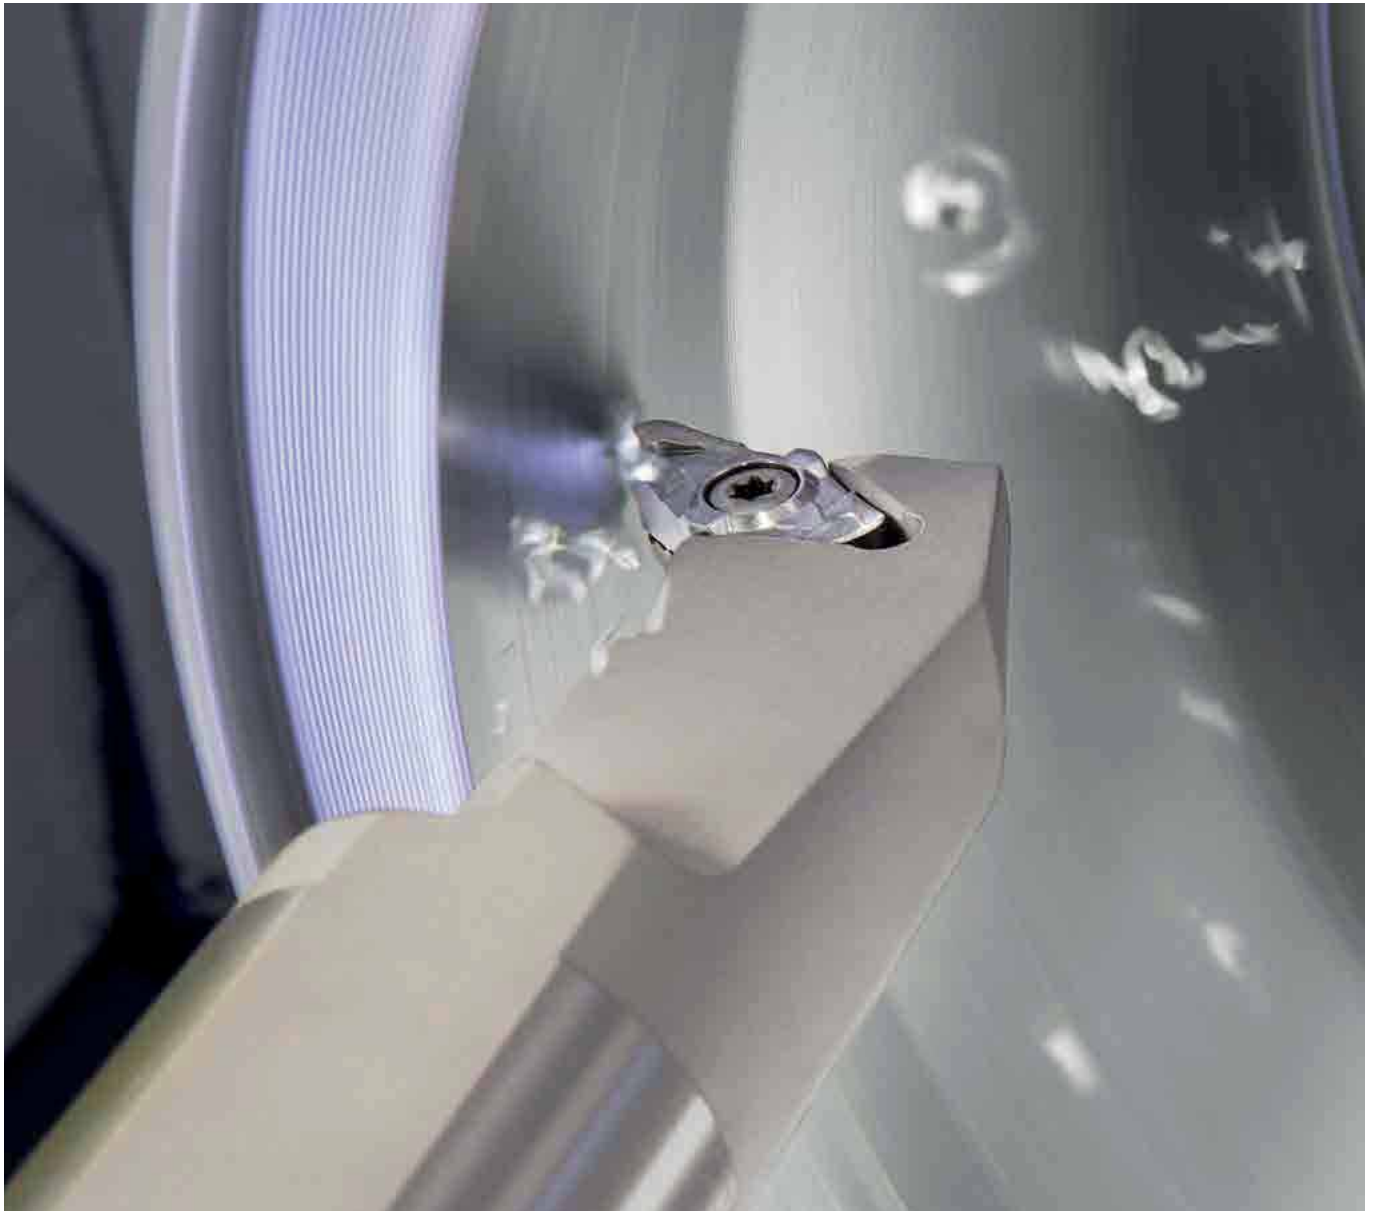

PCD

PCD has become a global industry standard for enhanced part quality and significant cost reductions in the overall production cycle.

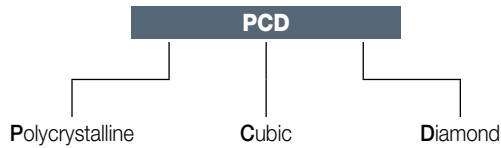

Non-Ferrous Machining

When it comes to non-ferrous materials processing such as aluminum alloys, titanium, carbon fiber, reinforced plastics, ceramic and other non-metallic materials, PCD (polycrystalline cubic diamond) is an advanced material that significantly reduces machining time and provides excellent surface quality due to excellent abrasion resistance and low coefficient of friction.

PCD has a high thermal conductivity and good heat dissipation from the cutting area. PCD possesses the highest flexural strength of all cutting materials. PCD is very well adapted for aluminum machining with high Si content or other abrasive filler materials.

Temperature hardness up to approximately 650 °C.

High grinding efficiency, low grinding force: Less heat will be generated by the hole in the grinding process. This can decrease or prevent burns and cracks on the surface of the workpiece, and decrease the equipment's wear and energy consumption.

High wear resistance: Diamond grinding tools' change in dimension is small. This can lead to good grinding quality and high grinding precision.


Long lifespan, long dressing period: This can greatly increase work efficiency and decrease the product's labor intensity. Low comprehensive cost: The processing cost of each workpiece is lower.



Recommended Cutting Conditions for PCD Grades

Materials on Hardness Scales

PCD is characterized by a hardness that is comparable to natural diamond, and it can achieve hardness of 6000HV and more.

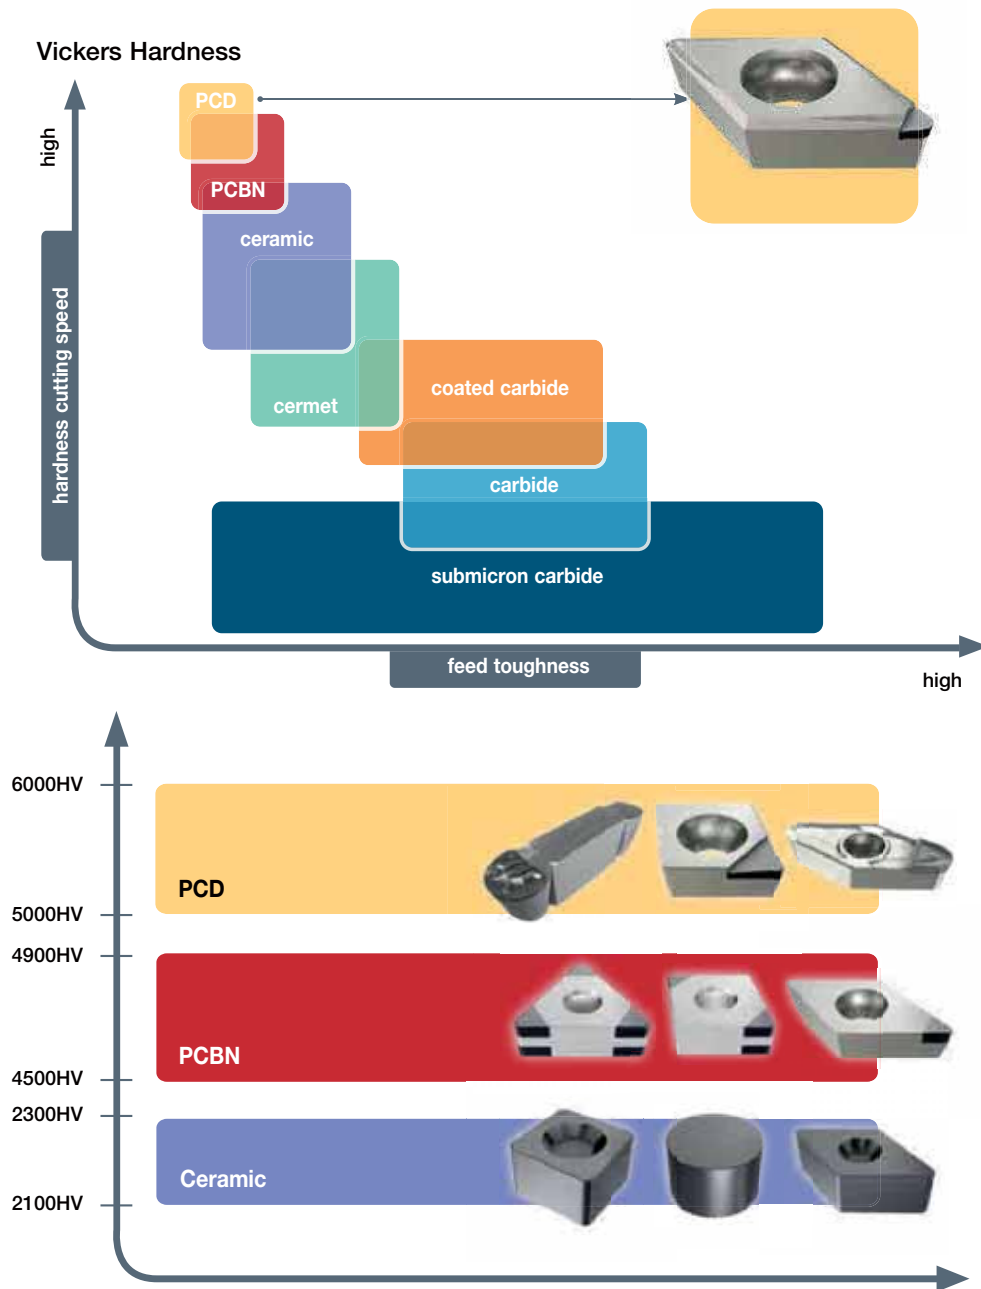


| Work Material | Grade | Cutting Speed (m/min) | Feed (mm/rev) | Depth of Cut (mm) |
|----------------------|----------|-----------------------|---------------|-------------------|
| Al Alloy (4-9% Si) | ID5 | 800-2500 | 0.1-0.3 | |
| Al Alloy (9-14% Si) | ID5, ID6 | 600-1300 | 0.1-0.3 | 0.05-0.3 |
| Al Alloy (14-18% Si) | ID5, ID6 | 300-600 | 0.1-0.3 | |
| Cemented Carbide | ID5, ID6 | 20-40 | 0.05-0.2 | 0.02-0.5 |
| Wood | ID5, ID4 | 1000-5000 | 0.1-0.5 | 0.2-5.0 |
| Cu Alloy | ID5 | 600-1000 | 0.05-0.2 | 0.05-3.0 |
| Plastic, FRP | ID5, ID4 | 300-1000 | 0.05-0.25 | 0.05-3.0 |

* ID4 and ID6 grades can be offered as special options

CNMA (PCD)

80° Rhombic Inserts with a Single PCD Top Corner Tip and Positive Rake for Finishing Applications

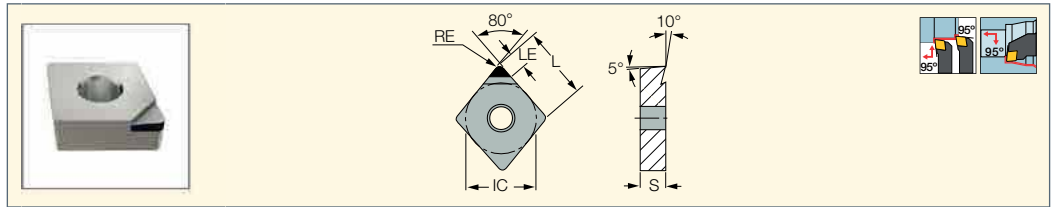


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|-------|------|------|-----|------------|-----------|----------------------------|--|
| | L | IC | S | RE | LE | a_p (mm) | | f (mm/rev) | |
| CNMA 120404D | 12.90 | 12.70 | 4.76 | 0.40 | 3.9 | ● | 0.10-3.00 | 0.05-0.26 | |
| CNMA 120408D | 12.90 | 12.70 | 4.76 | 0.80 | 3.6 | ● | 0.10-3.00 | 0.05-0.26 | |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

CCMT (PCD)

Inserts with a Single PCD Top Corner Tip, 7° Clearance and Positive Rake Angle for Finishing Aluminum

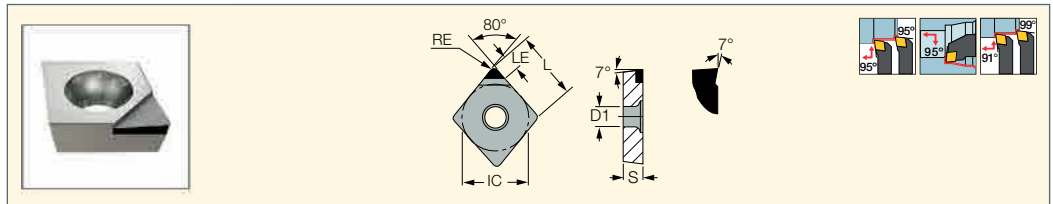


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|------|-----|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a_p (mm) | f (mm/rev) |
| CCMT 060202D | 6.30 | 6.35 | 2.38 | 0.20 | 3.1 | 2.80 | ● | 0.08-3.00 | 0.05-0.30 |
| CCMT 060204D | 6.30 | 6.35 | 2.38 | 0.40 | 3.0 | 2.80 | ● | 0.10-3.00 | 0.05-0.30 |
| CCMT 09T304D | 9.70 | 9.52 | 3.97 | 0.40 | 3.9 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

DCMT (PCD)

55° Rhombic Inserts with a PCD Single Top Corner Tip, 7° Clearance and Positive Rake Angle for Finishing Applications

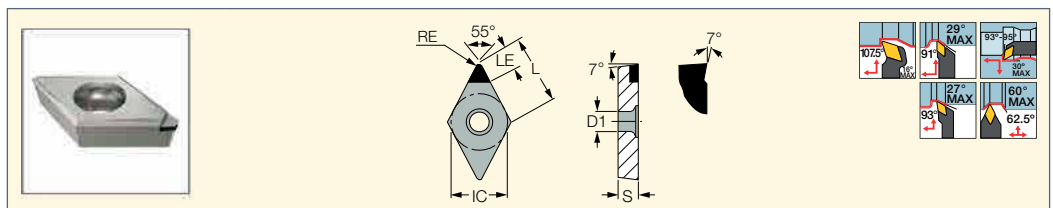

| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|------|-----|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a_p (mm) | f (mm/rev) |
| DCMT 11T302D | 11.60 | 9.52 | 3.97 | 0.20 | 3.7 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| DCMT 11T304D | 11.60 | 9.52 | 3.97 | 0.40 | 3.6 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| DCMT 11T308D | 11.60 | 9.52 | 3.97 | 0.80 | 3.3 | 4.40 | ● | 0.10-3.00 | 0.05-0.29 |


• For user guide and cutting speed recommendations, see pages 4-5,27-28,31



ISOTURN

VCGT-DW (PCD)

Inserts with 7° Clearance and a Single PCD Top Corner Tip Chipformer for Machining Aluminum

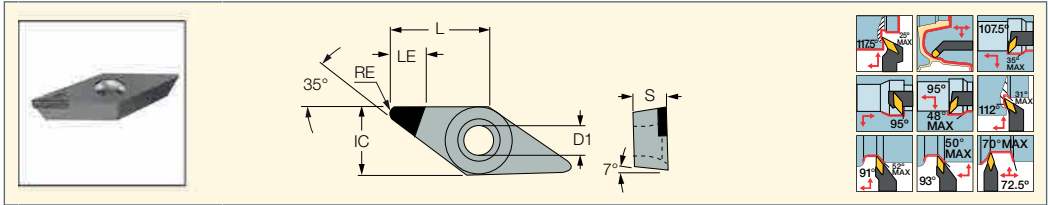


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a _p (mm) | f (mm/rev) |
| VCGT 160404-DW | 16.60 | 9.52 | 4.76 | 0.40 | 6.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 160408-DW | 16.60 | 9.52 | 4.76 | 0.80 | 6.40 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 160412-DW | 16.60 | 9.52 | 4.76 | 1.20 | 6.30 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 220516-DW | 22.10 | 12.70 | 5.56 | 1.60 | 6.30 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 220520-DW | 22.10 | 12.70 | 5.56 | 2.00 | 6.20 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 220530-DW | 22.10 | 12.70 | 5.56 | 3.00 | 6.00 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

ISOTURN

TCMT (PCD)

Inserts with a Single PCD Top Corner Tip, 7° Clearance and Positive Rake Angle for Finishing Aluminum

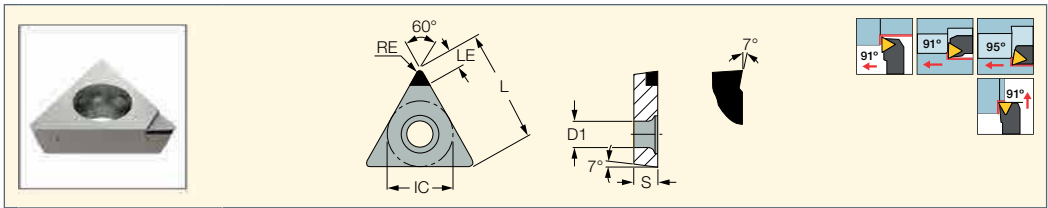


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|------|-----|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a _p (mm) | f (mm/rev) |
| TCMT 110204D | 11.00 | 6.35 | 2.38 | 0.40 | 3.8 | 2.80 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

ISOTURN

TPGX (PCD)

Triangular Inserts with PCD Single Top Corner Brazed Tip, 11° Clearance and Positive Rake Angle for Finishing Aluminum

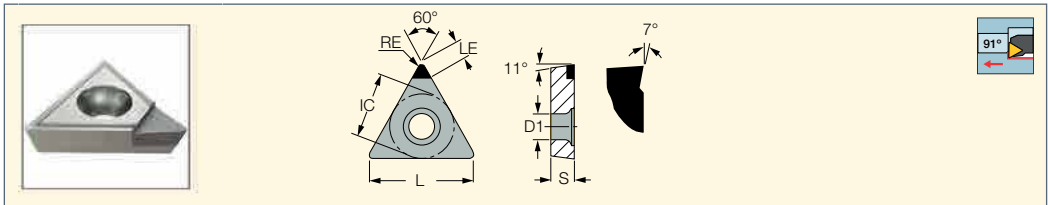


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|-------------|------------|------|------|------|-----|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a _p (mm) | f (mm/rev) |
| TPGX 090202 | 9.52 | 5.56 | 2.38 | 0.20 | 3.0 | 2.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 090204 | 9.52 | 5.56 | 2.38 | 0.40 | 3.0 | 2.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 110302 | 11.00 | 6.35 | 3.18 | 0.20 | 3.4 | 3.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 110304 | 11.00 | 6.35 | 3.18 | 0.40 | 3.8 | 3.50 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

ISOTURN

VCGT (PCD)

35° Rhombic Single Brazed Tip Corner Inserts for Aluminum Finishing (PCD)

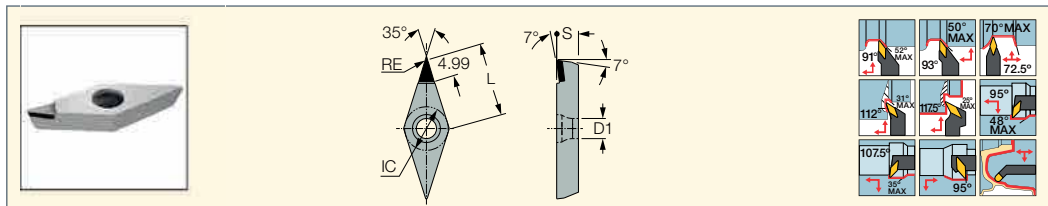

| Designation | Dimensions | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|-------|------|-----|----------------------------|------------|
| | IC | S | RE | L | D1 | | a _p (mm) | f (mm/rev) |
| VCGT 160404D | 9.52 | 4.76 | 0.40 | 16.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 160408D | 9.52 | 4.76 | 0.80 | 16.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31



Machining Data and Speed Recommendations for Turning

| ISO | Material | Condition | Hardness HB | Material No. | PCD | |
|-----|-------------------------|----------------|------------------------------|--------------|----------|----------|
| | | | | | ID5 | |
| N | aluminum-wrought alloys | not hardenable | 60 | 21 | 600-2500 | |
| | | hardenable | 100 | 22 | 600-2500 | |
| | aluminum-cast alloys | ≤12% Si | not hardenable | 75 | 23 | 600-2500 |
| | | | hardenable | 90 | 24 | 600-2500 |
| | | >12% Si | high temperature | 130 | 25 | |
| | | | >1% Pb | free cutting | 110 | 26 |
| | copper alloys | | brass | 90 | 27 | 600-800 |
| | | | electrolytic copper | 100 | 28 | 600-800 |
| | | | duroplastics, fiber plastics | 70 shore D | 29 | |
| | non metallic | | hard rubber | 55 shore D | 30 | |



Groove-Turn - Indexable Inserts

Chipbreaker Selection

Problematic and Specific Materials

PA-Type

- First choice for machining aluminum.
- High positive rake.
- Peripheral ground and polished top rake with a very sharp edge.
- Suitable also for finish operations on titanium and heat resistant alloys.
- Width range external: 3-8 mm.



Profiling (full Radius)

PA-Type

- First choice for profiling aluminum.
- High positive rake.
- Peripheral ground and polished top rake with a very sharp edge.
- Suitable also for finish operations on titanium and heat resistant alloys.
- Width range external: 3-8 mm.




YZ-Type

- First choice for profiling ductile aluminum.
- Peripheral ground and polished top rake with a very sharp edge.
- Width range external: 3-8 mm.




GRIPA
Ground Double-Ended
Inserts for External, Internal
and Face Machining

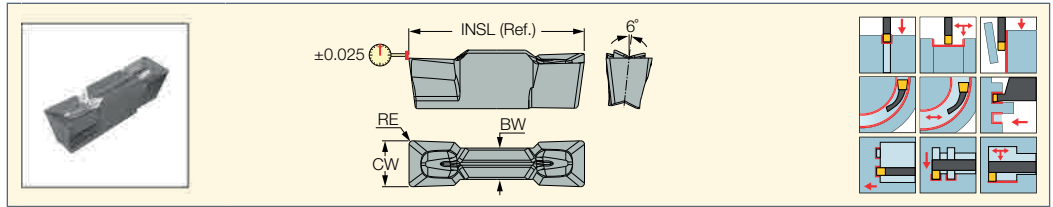

| Designation | Dimensions | | | | | | IC07 | Recommended Machining Data | | | | |
|------------------------|------------|----------------------|------|----------------------|-------|------|------|----------------------------|--------------------|----------------------|---------------------------|-------------------------|
| | CW | CWTOL ⁽¹⁾ | RE | RETOL ⁽²⁾ | INSL | BW | | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) | f face-groove (mm/rev) | f face-turn (mm/rev) |
| GRIPA 3.00-0.40 | 3.00 | 0.020 | 0.40 | 0.030 | 16.00 | 2.28 | ● | 0.25-1.80 | 0.15-0.19 | 0.07-0.11 | 0.08-0.14 | 0.12-0.20 |
| GRIPA 4.00-0.40 | 4.00 | 0.020 | 0.40 | 0.030 | 19.02 | 2.82 | ● | 0.50-2.40 | 0.18-0.24 | 0.09-0.15 | 0.10-0.20 | 0.14-0.31 |
| GRIPA 5.00-0.40 | 5.00 | 0.020 | 0.40 | 0.030 | 19.02 | 3.40 | ● | 0.50-3.00 | 0.20-0.30 | 0.11-0.20 | 0.11-0.23 | 0.16-0.34 |
| GRIPA 6.00-0.80 | 6.00 | 0.020 | 0.80 | 0.050 | 19.00 | 4.20 | ● | 0.50-3.60 | 0.24-0.42 | 0.13-0.25 | 0.11-0.26 | 0.19-0.41 |

- For user guide, see page 32
- ⁽¹⁾ Cutting width tolerance (+/-)
- ⁽²⁾ Corner radius tolerance (+/-)

GRIPA (full radius)
Ground Double-Ended Full
Radius Inserts for External,
Internal and Face Machining

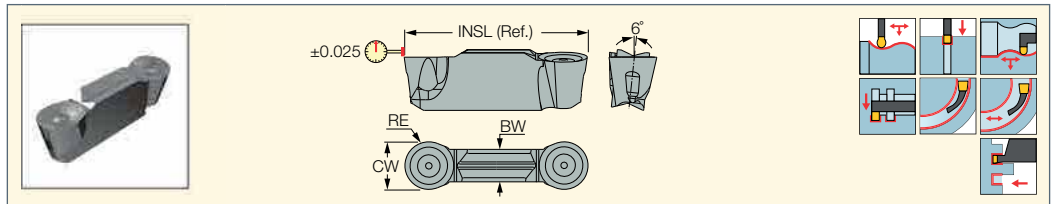

| Designation | Dimensions | | | | | | IC07 | Recommended Machining Data | | | | |
|------------------------|------------|----------------------|------|----------------------|-------|------|------|----------------------------|--------------------|----------------------|---------------------------|-------------------------|
| | CW | CWTOL ⁽¹⁾ | RE | RETOL ⁽²⁾ | INSL | BW | | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) | f face-groove (mm/rev) | f face-turn (mm/rev) |
| GRIPA 3.00-1.50 | 3.00 | 0.020 | 1.50 | 0.050 | 15.96 | 2.28 | ● | 0.25-1.80 | 0.18-0.26 | 0.07-0.13 | 0.08-0.14 | 0.12-0.20 |
| GRIPA 4.00-2.00 | 4.00 | 0.020 | 2.00 | 0.050 | 19.16 | 2.82 | ● | 0.50-2.40 | 0.20-0.34 | 0.09-0.17 | 0.10-0.20 | 0.14-0.31 |
| GRIPA 5.00-2.50 | 5.00 | 0.020 | 2.50 | 0.050 | 19.16 | 3.40 | ● | 0.50-3.00 | 0.23-0.42 | 0.11-0.21 | 0.11-0.23 | 0.16-0.34 |
| GRIPA 6.00-3.00 | 6.00 | 0.020 | 3.00 | 0.050 | 19.16 | 3.97 | ● | 0.50-3.60 | 0.24-0.50 | 0.13-0.25 | 0.11-0.26 | 0.19-0.41 |


- For user guide, see page 32
- ⁽¹⁾ Cutting width tolerance (+/-)
- ⁽²⁾ Corner radius tolerance (+/-)



CUTGRIP

GIPA (W=3-6)

Double-Ended Precision Ground Inserts with a Polished Top Rake for Machining Aluminum

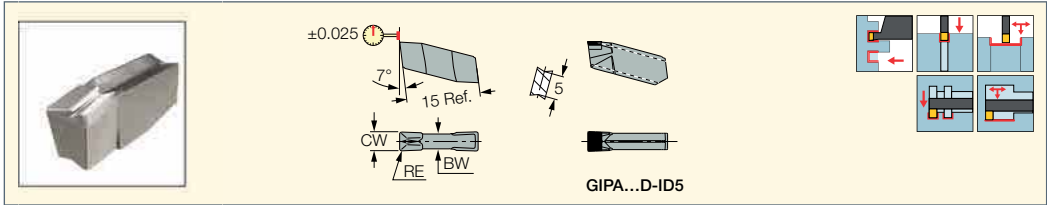

| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | | |
|---------------------------------|------------|------|----------------------|----------------------|------|--------------|-----|----------------------------|-----------------|-------------------|
| | CW | RE | CWTOL ⁽²⁾ | RETOL ⁽³⁾ | BW | IC20 | ID5 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GIPA 3.00-0.20 | 3.00 | 0.20 | 0.020 | 0.030 | 2.40 | ● | | 0.25-1.80 | 0.12-0.20 | 0.08-0.14 |
| GIPA 3.00-0.20-D ⁽¹⁾ | 3.00 | 0.20 | 0.020 | 0.030 | 2.40 | | ● | 0.25-1.80 | 0.12-0.25 | 0.09-0.16 |
| GIPA 4.00-0.40 | 4.00 | 0.40 | 0.020 | 0.030 | 3.20 | ● | | 0.50-2.40 | 0.14-0.31 | 0.10-0.20 |
| GIPA 5.00-0.40 | 5.00 | 0.40 | 0.020 | 0.030 | 4.00 | ● | | 0.50-3.00 | 0.16-0.34 | 0.11-0.23 |
| GIPA 6.00-0.40 | 6.00 | 0.40 | 0.020 | 0.030 | 4.80 | ● | | 0.50-3.60 | 0.19-0.41 | 0.11-0.26 |

• DMIN for internal machining = 70 mm • For user guide, see page 32

⁽¹⁾ Single-ended PCD tipped insert


⁽²⁾ Cutting width tolerance (+/-)

⁽³⁾ Corner radius tolerance (+/-)

CUTGRIP

GIPA (full radius W=3-6)

Precision Double-Ended Inserts with Polished Top Rake for Machining Aluminum

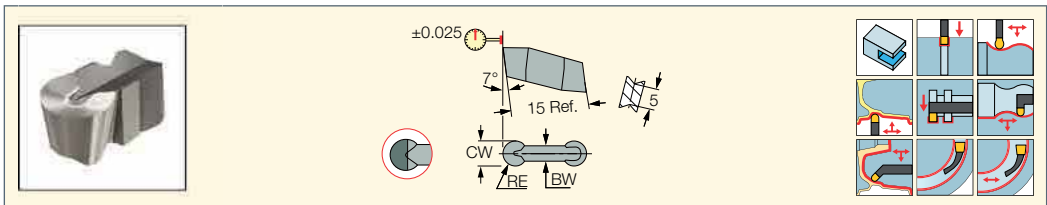

| Designation | Dimensions | | | | | Tough ↔ Hard | | | | Recommended Machining Data | | |
|-----------------------------------|------------|------|----------------------|----------------------|------|--------------|-------|-----|-----|----------------------------|-----------------|-------------------|
| | CW | RE | CWTOL ⁽⁴⁾ | RETOL ⁽⁵⁾ | BW | IC20 | IC806 | IC4 | ID5 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GIPA 3.00-1.50 | 3.00 | 1.50 | 0.020 | 0.050 | 2.40 | ● | | | | 0.00-1.50 | 0.15-0.30 | 0.08-0.16 |
| GIPA 3.00-1.50-D ⁽¹⁾ | 3.00 | 1.50 | 0.020 | 0.050 | 2.40 | | | | ● | 0.00-1.50 | 0.19-0.36 | 0.09-0.19 |
| GIPA 4.00-2.00 | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | ● | ● | | | 0.00-2.00 | 0.20-0.43 | 0.10-0.22 |
| GIPA 4.00-2.00-D ⁽¹⁾ | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | | | | ● | 0.00-2.00 | 0.25-0.53 | 0.12-0.26 |
| GIPA 4.00-2.00YZ-D ⁽²⁾ | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | | | | ● | 0.00-2.00 | 0.25-0.53 | 0.12-0.26 |
| GIPA 5.00-2.50 | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | ● | ● | | | 0.00-2.50 | 0.21-0.48 | 0.09-0.24 |
| GIPA 5.00-2.50-D ⁽¹⁾ | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | | | | ● | 0.00-2.50 | 0.22-0.60 | 0.11-0.30 |
| GIPA 5.00-2.50YZ-D ⁽²⁾ | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | ● | | | ● | 0.00-2.50 | 0.22-0.60 | 0.11-0.30 |
| GIPA 6.00-3.00 | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | ● | | | ● | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |
| GIPA 6.00-3.00-D ⁽¹⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | | ● | 0.00-3.00 | 0.26-0.72 | 0.13-0.36 |
| GIPA 6.00-3.00YZ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | ● | | | | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |
| GIPA 6.00-3.00YZ-D ⁽²⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | | ● | 0.00-3.00 | 0.26-0.72 | 0.13-0.36 |
| GIPA 6.00-3.00CB ⁽³⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | | ● | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |

• For user guide, see page 32

⁽¹⁾ Single-ended PCD tipped insert

⁽²⁾ Single-ended molded PCD chipformer tipped insert

⁽³⁾ Single-ended flat PCD tipped insert with chip deflector

⁽⁴⁾ Cutting width tolerance (+/-)


⁽⁵⁾ Corner radius tolerance (+/-)

● First choice grade



CUTGRIP

GIPA/GIDA 8 (full radius)
Precision Double-Ended
Inserts with Polished Top Rake
for Machining Aluminum

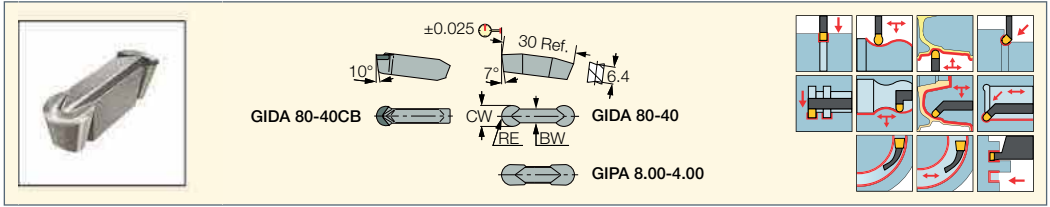


| Designation | Dimensions | | | | | Tough ↔ Hard | | | Recommended Machining Data | | |
|--------------------------------------|------------|------|----------------------|----------------------|------|--------------|-----|-----|----------------------------|--------------------|----------------------|
| | CW | RE | CWTOL ⁽²⁾ | RETOL ⁽³⁾ | BW | IC20 | IC4 | ID5 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GIDA 80-40 | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | ● | ● | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40-D | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40CB-D ⁽¹⁾ | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40YZ | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | ● | ● | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40YZ-D | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.35-0.96 | 0.18-0.48 |
| GIPA 8.00-4.00 | 8.00 | 4.00 | 0.020 | 0.050 | 6.00 | ● | | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |

- ID5 is a single-ended PCD tipped insert • For user guide, see page 32
- ⁽¹⁾ Should not be clamped on tools with "A" suffix
- ⁽²⁾ Cutting width tolerance (+/-)
- ⁽³⁾ Corner radius tolerance (+/-)



CUTGRIP

GDMA
Utility Double-Ended Insert
for Machining Aluminum

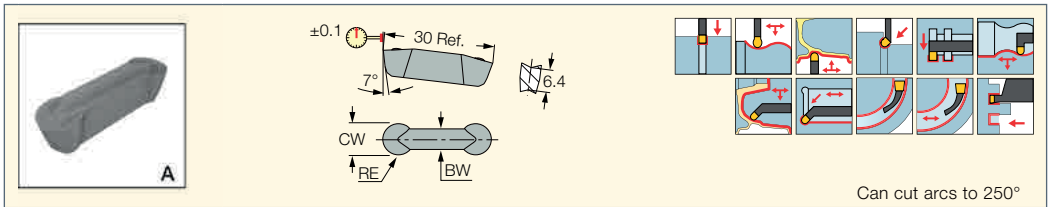

| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | | |
|-----------------|------------|------|----------------------|----------------------|------|--------------|-------|----------------------------|--------------------|----------------------|
| | CW | RE | CWTOL ⁽¹⁾ | RETOL ⁽²⁾ | BW | IC07 | IC507 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GDMA 840 | 8.00 | 4.00 | 0.050 | 0.050 | 5.60 | ● | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |

- For heavy-duty machining • DMIN for internal machining = 65 mm • For user guide, see page 32
- ⁽¹⁾ Cutting width tolerance (+/-)
- ⁽²⁾ Corner radius tolerance (+/-)
- First choice grade



Parting - Indexable Inserts



TANG-GRIP
PARTING LINE
TAG N-A



TANG-GRIP
PARTING LINE
TAG N-J/JS



TANG-GRIP
PARTING LINE
TAG R/L-J/JS



DO-GRIP
TWISTED 2-SIDED
DGN/DGNM-J/JS



DO-GRIP
TWISTED 2-SIDED
DGN-P




DO-GRIP
TWISTED 2-SIDED
DGR/L-J/JS



DO-GRIP
TWISTED 2-SIDED
DGR-P




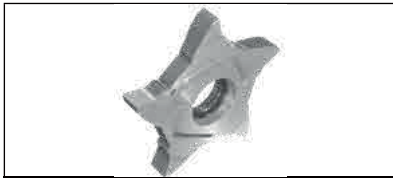

PENTACUT
PARTING & GROOVING LINE
PENTA 24N-PF/P



PENTACUT
PARTING & GROOVING LINE
PENTA 24R-P

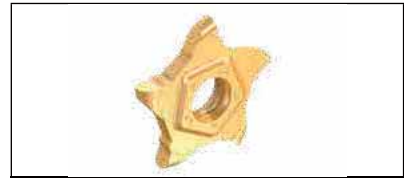

PENTACUT
PARTING & GROOVING LINE
PENTA 17-P-RS/LS (full radius)



PENTACUT
PARTING & GROOVING LINE
PENTA 17 R/L-P-RS



PENTACUT
PARTING & GROOVING LINE
PENTA 24N-J



PENTACUT
PARTING & GROOVING LINE
PENTA 24R/L-J



PENTACUT
PARTING & GROOVING LINE
PENTA 24N-J (full radius)



PENTACUT
PARTING & GROOVING LINE
PENTA 34N-J



PENTACUT
PARTING & GROOVING LINE
PENTA 34R/L-J



PENTA IQGRIP
PARTING LINE
PENTA D-N-J



PENTA IQGRIP
PARTING LINE
PENTA D-R/L-J



PENTACUT
PARTING & GROOVING LINE
PENTA 24N-J-RS



PENTACUT
PARTING & GROOVING LINE
PENTA 24N-Z



PENTACUT
PARTING & GROOVING LINE
PENTA 24R/L-Z




Tools and Inserts for Machining Aluminum Wheels

CUTGRIP

GHIUR/L-C-A (15° & 27.5°) Bars

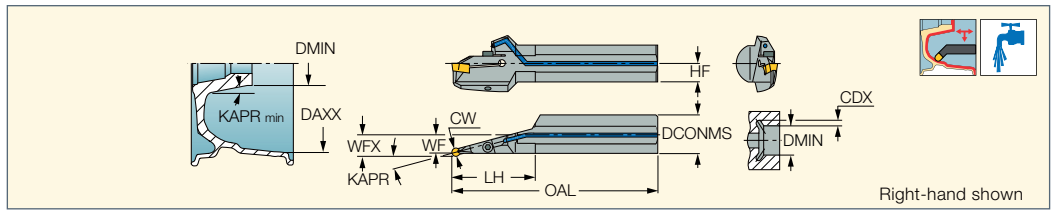


Internal Grooving and Turning Bars for Machining Aluminum Wheels



| Designation | CW | DCONMS | DMIN | CDX ⁽¹⁾ | OAL | LH | WFX | WF | HF | KAPR ⁽²⁾ |
|---------------------|------|--------|--------|---------------------|--------|------|-------|------|------|---------------------|
| GHIUR/L 40C-15A-6 | 6.00 | 40.00 | 160.00 | - | 320.00 | 83.0 | 21.20 | 19.0 | 18.0 | 15.0 |
| GHIUR/L 40C-15A-8 | 8.00 | 40.00 | 160.00 | 0.00 ⁽³⁾ | 320.00 | 83.0 | 21.00 | 18.0 | 18.0 | 15.0 |
| GHIUR/L 40C-15A-8 | 8.00 | 50.00 | 100.00 | 0.00 ⁽⁴⁾ | 350.00 | 83.0 | 26.00 | 23.0 | 23.0 | 15.0 |
| GHIUR/L 40C-27.5A-6 | 6.00 | 40.00 | 90.00 | 0.60 ⁽⁵⁾ | 320.00 | 80.0 | 25.10 | 23.5 | 18.0 | 27.5 |
| GHIUR/L 50C-27.5A-8 | 8.00 | 50.00 | 120.00 | 1.80 ⁽⁵⁾ | 350.00 | 82.0 | 30.20 | 28.0 | 23.0 | 27.5 |

- Upper jaw with hard coating to sustain chip deflection
- ⁽¹⁾ Dimension for minimum bore diameter
- ⁽²⁾ Tool cutting edge angle
- ⁽³⁾ For bore diameter D>200, CDX is 0.5 mm
- ⁽⁴⁾ For bore diameter D>200, CDX is 1.4 mm
- ⁽⁵⁾ For bore diameter D>200, CDX is 4.0 mm


Spare Parts

| Designation |  |  |  |
|---------------------|---|---|---|
| GHIUR/L 40C-15A-6 | SR M5X20 DIN912 | HW 4.0 | PL 40 |
| GHIUR/L 40C-15A-8 | SR M6X20 DIN912 | HW 5.0 | PL 40 |
| GHIUR/L 50C-15A-8 | SR M6X25 DIN912 | HW 5.0 | PL 40 |
| GHIUR/L 40C-27.5A-6 | SR M6X25 DIN912 | HW 5.0 | PL 40 |
| GHIUR/L 40C-27.5A-6 | SR M6X20 DIN912 | HW 5.0 | PL 40 |
| GHIUR/L 50C-27.5A-8 | SR M6X25 DIN912 | HW 5.0 | PL 40 |

CUTGRIP

GHIUR/L-C-22.5A-8V

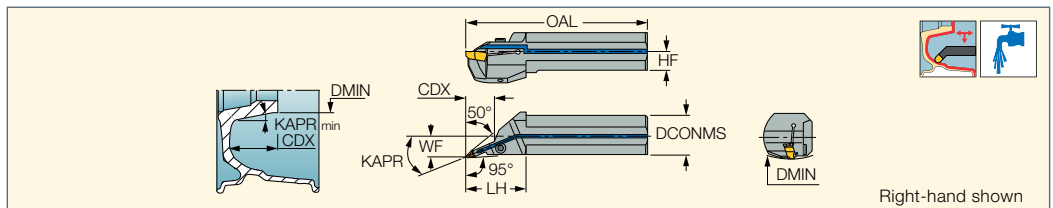


22.5° Approach Angle Bars for Facing and Internal Machining



| Designation | CW | DCONMS | DMIN | CDX | OAL | LH | HF | WF | KAPR ⁽¹⁾ |
|----------------------|------|--------|--------|-------|--------|------|------|-------|---------------------|
| GHIUR/L 40C-22.5A-8V | 8.00 | 40.00 | 300.00 | 28.50 | 250.00 | 60.0 | 18.0 | 21.00 | 22.5 |

- Upper jaw with hard coating to sustain chip deflection
- ⁽¹⁾ Tool cutting edge angle

Spare Parts


| Designation |  |  |  |
|--------------------|---|---|---|
| GHIUR/L-C-22.5A-8V | SR M6X20 DIN912 | HW 5.0 | PL 40 |



CUTGRIP

GHIUR/L-UC

45° Undercutting Bars for Internal Turning Aluminum Wheels

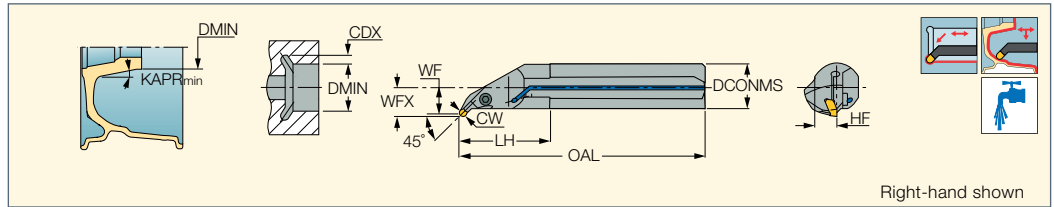

| Designation | CW | DCONMS | DMIN | CDX ⁽¹⁾ | OAL | LH | WFX | WF | HF | | | |
|----------------|------|--------|-------|---------------------|--------|------|-------|------|------|-----------------|--------|-------|
| GHIUR/L 40UC-6 | 6.00 | 40.00 | 70.00 | 0.00 ⁽²⁾ | 350.00 | 75.0 | 23.80 | 24.7 | 18.0 | SR M6X20 DIN912 | HW 5.0 | PL 40 |
| GHIUR 50UC-6 | 6.00 | 50.00 | 78.00 | 0.00 ⁽³⁾ | 350.00 | 75.0 | 28.80 | 29.7 | 23.0 | SR M6X20 DIN912 | HW 5.0 | PL 40 |
| GHIUR/L 40UC-8 | 8.00 | 40.00 | 68.00 | 0.00 ⁽⁴⁾ | 350.00 | 79.0 | 28.80 | 26.0 | 18.0 | SR M6X20 DIN912 | HW 5.0 | PL 40 |
| GHIUR 50UC-8 | 8.00 | 50.00 | 58.00 | 0.00 ⁽⁵⁾ | 350.00 | 80.0 | 30.20 | 31.4 | 23.0 | SR M6X20 DIN912 | HW 5.0 | PL 40 |

⁽¹⁾ Cutting depth maximum

⁽²⁾ For bore diameter more than 200, CDX is 1.3 mm

⁽³⁾ For bore diameter more than 200, CDX is 2.0 mm


⁽⁴⁾ For bore diameter more than 200, CDX is 2.8 mm

⁽⁵⁾ For bore diameter more than 200, CDX is 6.0 mm

CUTGRIP

GHIFR/L-A

8° / 10° Approach Angle Bars for Facing and Internal Machining

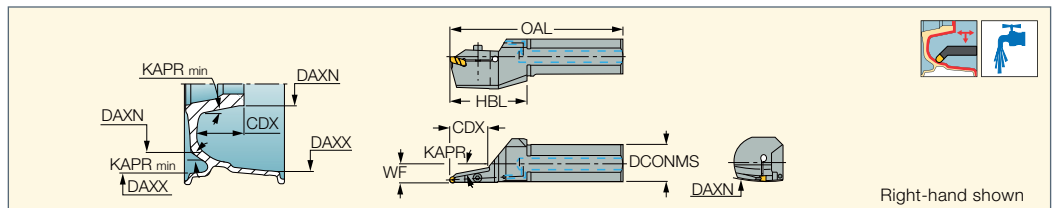

| Designation | CW | DAXN ⁽¹⁾ | DAXX ⁽²⁾ | OAL | HBL | CDX | WF | KAPR ⁽³⁾ | DCONMS | | | |
|-------------------|------|---------------------|---------------------|--------|-------|-------|-------|---------------------|--------|-----------------|--------|-------|
| GHIFR/L 40C-10A-6 | 6.00 | 300.00 | 360.0 | 300.00 | 80.0 | 40.00 | 19.30 | 10.0 | 40.00 | SR M5X20DIN912 | HW 4.0 | PL 40 |
| GHIFR/L 40C-8A-8 | 8.00 | 300.00 | 360.0 | 320.00 | 100.0 | 70.00 | 19.50 | 8.0 | 40.00 | SR M6X25 DIN912 | HW 5.0 | PL 40 |

• Upper jaw with hard coating to sustain chip deflection

⁽¹⁾ Minimum axial grooving diameter


⁽²⁾ Maximum axial grooving diameter

⁽³⁾ Tool cutting edge angle

CUTGRIP

GHDR/L-8A

External Tools for Turning, Grooving and Parting; Upper Jaw with Hard Coating to Sustain Chip Deflection

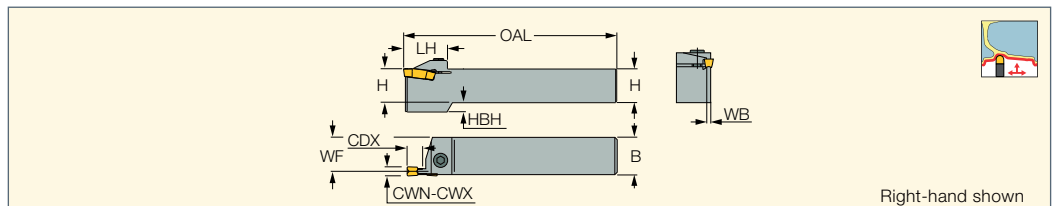

| Designation | H | CWN ⁽¹⁾ | CWX ⁽²⁾ | CDX ⁽³⁾ | B | OAL | WF | WB | LH | HBH | | |
|--------------|------|--------------------|--------------------|--------------------|------|--------|-------|------|------|-----|-----------------|-----------------------|
| GHDR/L 25-8A | 25.0 | 8.00 | 8.00 | 25.00 | 25.0 | 150.00 | 22.00 | 6.00 | 40.0 | 7.6 | SR M6X16 DIN912 | HW 5.0 ⁽⁴⁾ |
| GHDR 32-8A | 32.0 | 8.00 | 8.00 | 25.00 | 32.0 | 170.00 | 29.00 | 6.00 | 40.0 | - | SR M6X16 DIN912 | HW 5.0 ⁽⁴⁾ |

• Upper jaw with hard coating to sustain chip deflection

⁽¹⁾ Minimum cutting width

⁽²⁾ Maximum cutting width

⁽³⁾ Cutting depth maximum


⁽⁴⁾ For optional key with limited tightening torque click on "More Info"





CUTGRIP

GHVR/L

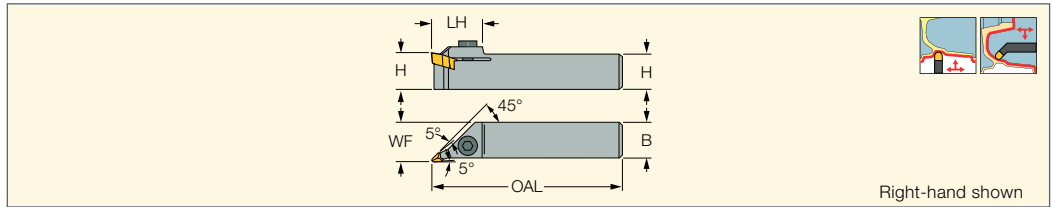Internal and External Profiling
Holders for Machining
Aluminum Wheels




Right-hand shown

| Designation | H | B | OAL | WF | LH |  |  |
|--------------------|------|------|--------|-------|------|---|---|
| GHVR/L 25-8 | 25.0 | 25.0 | 150.00 | 29.00 | 41.0 | SR M6X16 DIN912 | HW 5.0 |



CUTGRIP

GHDKR/L

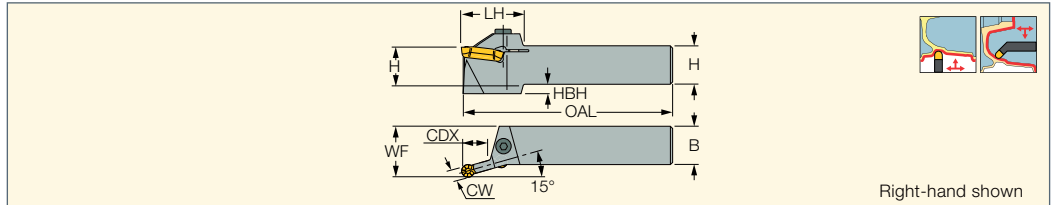External and Internal Profiling
Holders for Machining
Aluminum Wheels



Right-hand shown


| Designation | CW | H | B | LF | LH | WF | HBH |  |  |
|------------------------------------|------|------|------|--------|------|-------|-----|---|---|
| GHDKR/L 25-6 ⁽¹⁾ | 6.00 | 25.0 | 25.0 | 150.00 | 40.0 | 32.20 | 6.0 | SR M6X20 DIN912 | HW 5.0 |
| GHDKR/L 25-8 | 8.00 | 25.0 | 25.0 | 150.00 | 44.0 | 33.00 | 6.0 | SR M6X20 DIN912 | HW 5.0 |
| GHDKR/L 32-8 | 8.00 | 32.0 | 32.0 | 170.00 | 44.0 | 40.00 | - | SR M6X20 DIN912 | HW 5.0 |

⁽¹⁾ Only insert GIPA 6.00-3.00 is suitable for this tool



CUTGRIP

GIPA (full radius W=3-6)
Precision Double-Ended
Inserts with Polished Top Rake
for Machining Aluminum

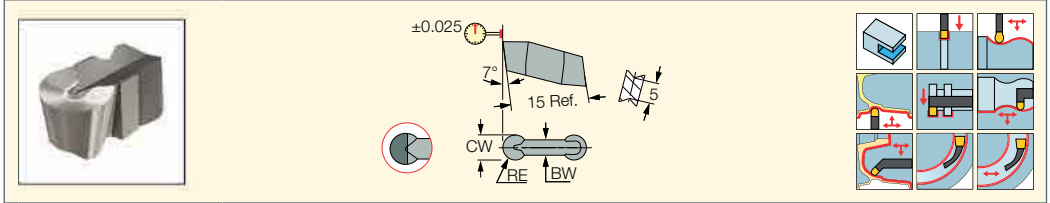

| Designation | Dimensions | | | | | Tough ↔ Hard | | | Recommended Machining Data | | |
|--|------------|------|----------------------|----------------------|------|--------------|-----|-----|----------------------------|--------------------|----------------------|
| | CW | RE | CWTOL ⁽⁴⁾ | RETOL ⁽⁵⁾ | BW | IC20 | IC4 | ID5 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GIPA 3.00-1.50 | 3.00 | 1.50 | 0.020 | 0.050 | 2.40 | ● | | | 0.00-1.50 | 0.15-0.30 | 0.08-0.16 |
| GIPA 3.00-1.50-D ⁽¹⁾ | 3.00 | 1.50 | 0.020 | 0.050 | 2.40 | | | ● | 0.00-1.50 | 0.19-0.36 | 0.09-0.19 |
| GIPA 4.00-2.00 | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | ● | | | 0.00-2.00 | 0.20-0.43 | 0.10-0.22 |
| GIPA 4.00-2.00-D ⁽¹⁾ | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | | | ● | 0.00-2.00 | 0.25-0.53 | 0.12-0.26 |
| GIPA 4.00-2.00YZ-D ⁽²⁾ | 4.00 | 2.00 | 0.020 | 0.050 | 3.20 | | | ● | 0.00-2.00 | 0.25-0.53 | 0.12-0.26 |
| GIPA 5.00-2.50 | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | ● | | | 0.00-2.50 | 0.21-0.48 | 0.09-0.24 |
| GIPA 5.00-2.50-D ⁽¹⁾ | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | | | ● | 0.00-2.50 | 0.22-0.60 | 0.11-0.30 |
| GIPA 5.00-2.50YZ-D ⁽²⁾ | 5.00 | 2.50 | 0.020 | 0.050 | 3.90 | | | ● | 0.00-2.50 | 0.22-0.60 | 0.11-0.30 |
| GIPA 6.00-3.00 | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | ● | ● | | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |
| GIPA 6.00-3.00-D ⁽¹⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | ● | 0.00-3.00 | 0.26-0.72 | 0.13-0.36 |
| GIPA 6.00-3.00YZ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | ● | | | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |
| GIPA 6.00-3.00YZ-D ⁽²⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | ● | 0.00-3.00 | 0.26-0.72 | 0.13-0.36 |
| GIPA 6.00-3.00CB ⁽³⁾ | 6.00 | 3.00 | 0.020 | 0.050 | 4.80 | | | ● | 0.00-3.00 | 0.21-0.58 | 0.11-0.29 |

⁽¹⁾ Single-ended PCD tipped insert

⁽²⁾ Single-ended molded PCD chipformer tipped insert

⁽³⁾ Single-ended flat PCD tipped insert with chip deflector

⁽⁴⁾ Cutting width tolerance (+/-)

⁽⁵⁾ Corner radius tolerance (+/-)




Scan the QR code for additional information.

Enter the item description in the search field to access additional related data.



CUTGRIP

GIPA/GIDA 8 (full radius)
Precision Double-Ended
Inserts with Polished Top Rake
for Machining Aluminum

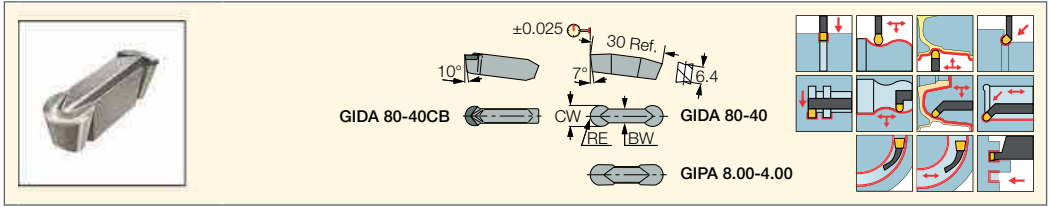


| Designation | Dimensions | | | | | Tough ↔ Hard | | | Recommended Machining Data | | |
|--------------------------------------|------------|------|----------------------|----------------------|------|--------------|-----|-----|----------------------------|--------------------|----------------------|
| | CW | RE | CWTOL ⁽²⁾ | RETOL ⁽³⁾ | BW | IC20 | IC4 | ID5 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GIDA 80-40 | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | ● | ● | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40-D | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40CB-D ⁽¹⁾ | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40YZ | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | ● | ● | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |
| GIDA 80-40YZ-D | 8.00 | 4.00 | 0.020 | 0.050 | 5.60 | | | ● | 0.00-4.00 | 0.35-0.96 | 0.18-0.48 |
| GIPA 8.00-4.00 | 8.00 | 4.00 | 0.020 | 0.050 | 6.00 | ● | | | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |

- ID5 is a single-ended PCD tipped insert
- ⁽¹⁾ Should not be clamped on tools with "A" suffix
- ⁽²⁾ Cutting width tolerance (+/-)
- ⁽³⁾ Corner radius tolerance (+/-)



CUTGRIP

GIPA 8-35V (V-shape)
V-Shaped Inserts for Machining
Aluminum Wheels

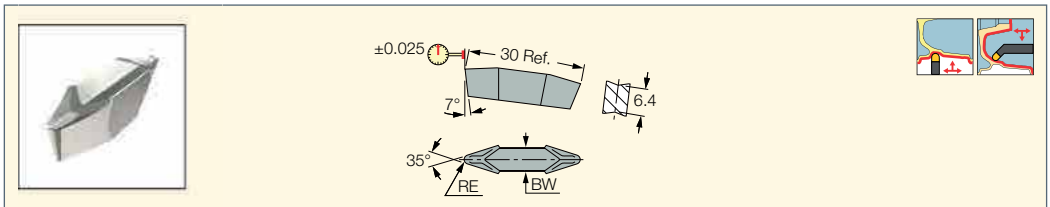


| Designation | Dimensions | | | Tough ↔ Hard | | | Recommended Machining Data | |
|---|------------|----------------------|------|--------------|-----|-----|----------------------------|--------------------|
| | RE | RETOL ⁽²⁾ | BW | IC20 | IC4 | ID5 | a _p (mm) | f turn (mm/rev) |
| GIPA 6.0-35V-0.8 | 0.80 | 0.050 | 4.80 | ● | | | 1.00-3.60 | 0.21-0.48 |
| GIPA 8YZ-35V-0.80 | 0.80 | 0.050 | 6.00 | | ● | | 1.00-4.80 | 0.24-0.56 |
| GIPA 8YZ-35V-1.20 | 1.20 | 0.050 | 6.00 | | ● | | 1.45-4.80 | 0.24-0.62 |
| GIPA 8YZ-35V-1.20-D ⁽¹⁾ | 1.20 | 0.050 | 6.00 | | | ● | 1.45-4.80 | 0.35-0.88 |
| GIPA 8-35V-1.20 | 1.20 | 0.050 | 6.00 | ● | | | 1.45-4.80 | 0.24-0.62 |
| GIPA 8-35V-1.20-D ⁽¹⁾ | 1.20 | 0.050 | 6.00 | | | ● | 1.45-4.80 | 0.35-0.88 |
| GIPA 8-35V-3.0 | 3.00 | 0.050 | 6.00 | ● | | | 3.60-4.80 | 0.24-0.67 |

- Precision ground and polished rake to avoid built-up edge
- Toolholder seat needs to be modified according to insert profile to ensure clearance
- ⁽¹⁾ Single-ended PCD tipped insert
- ⁽²⁾ Corner radius tolerance (+/-)



CUTGRIP

GDMA
Utility Double-Ended Insert
for Machining Aluminum

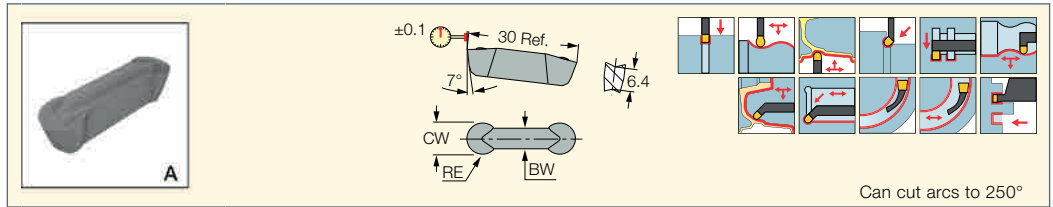


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | | |
|-----------------|------------|------|----------------------|----------------------|------|--------------|-------|----------------------------|-----------------|-------------------|
| | CW | RE | CWTOL ⁽¹⁾ | RETOL ⁽²⁾ | BW | IC07 | IC507 | a _p (mm) | f turn (mm/rev) | f groove (mm/rev) |
| GDMA 840 | 8.00 | 4.00 | 0.050 | 0.050 | 5.60 | ● | ● | 0.00-4.00 | 0.24-0.67 | 0.14-0.38 |

- For heavy-duty machining • DMIN for internal machining = 65 mm
- ⁽¹⁾ Cutting width tolerance (+/-)
- ⁽²⁾ Corner radius tolerance (+/-)
- First choice grade

FIXGRIP


FSHIUR
10° / 15° Approach Angle
Bars for Facing and Internal
Profiling of Aluminum

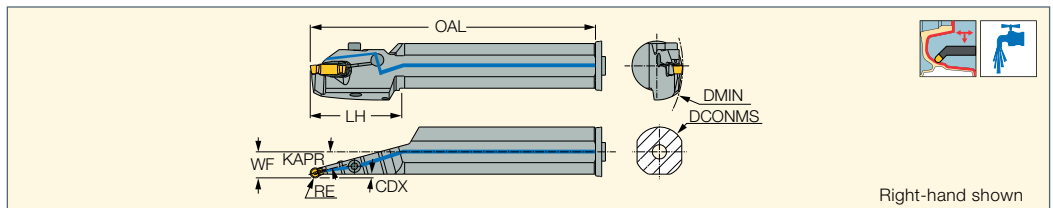

| Designation | CW | DCONMS | DMIN | OAL | LH | CDX ⁽¹⁾ | WF | KAPR ⁽²⁾ | | | | | |
|-------------------------|------|--------|--------|--------|------|--------------------|-------|---------------------|---------------|--------|---------|---------------|-------|
| FSHIUR 40C-15A-6 | 6.00 | 40.00 | 160.00 | 320.00 | 68.0 | 2.20 | 21.00 | 15.0 | SR M6X1-28509 | HW 5.0 | OR 5X1N | PU SEAL-28510 | PL 40 |
| FSHIUR 40C-10A-8 | 8.00 | 40.00 | 160.00 | 320.00 | 68.0 | 2.40 | 24.30 | 10.0 | SR M6X1-28509 | HW 5.0 | OR 5X1N | PU SEAL-28510 | PL 40 |
| FSHIUR 40C-15A-8 | 8.00 | 40.00 | 160.00 | 320.00 | 68.0 | 3.00 | 21.00 | 15.0 | SR M6X1-28509 | HW 5.0 | OR 5X1N | PU SEAL-28510 | PL 40 |

- Clamping torque for FSHIUR-6: 9 Nxm, for FSHDR-8: 10.5 Nxm
- ⁽¹⁾ Cutting depth maximum
- ⁽²⁾ Tool cutting edge angle

Insert Clamping Instructions

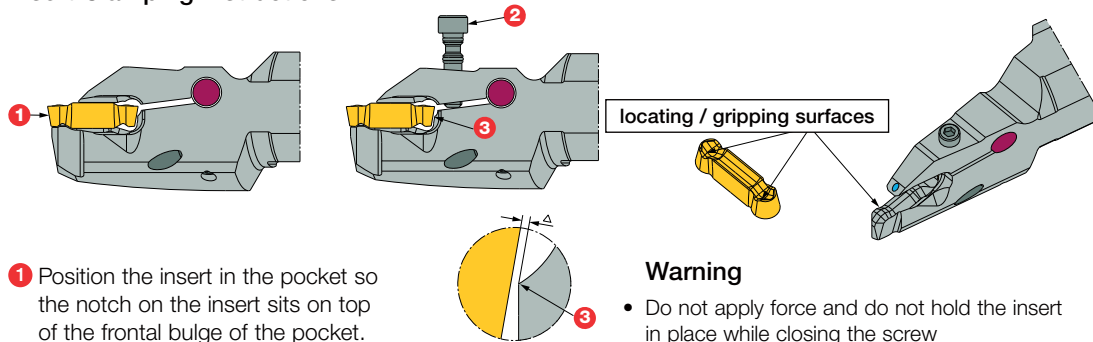

- 1 Position the insert in the pocket so the notch on the insert sits on top of the frontal bulge of the pocket.
- 2 Close the clamping screw Warning.


- Warning**
- Do not apply force and do not hold the insert in place while closing the screw
 - There is no contact between the insert and pocket rear wall 3 .





FSHDR


Tools with a Very Strong Insert Grip for Interrupted Cuts and Back Turning Aluminum Wheels

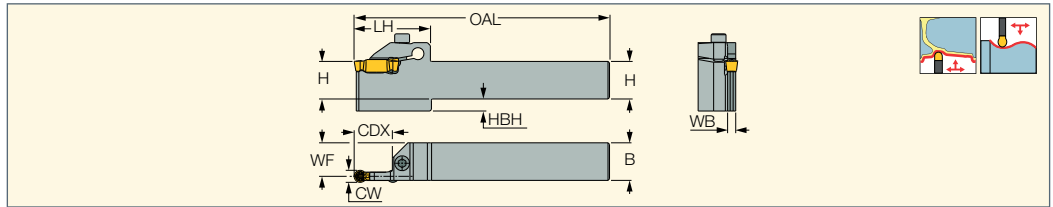


| Designation | CW | CDX ⁽¹⁾ | H | B | WF | WB | LH | HBH | OAL | | |
|-------------------|------|--------------------|------|------|-------|------|------|-----|--------|-----------------|--------|
| FSHDR 25-6 | 6.00 | 21.00 | 25.0 | 25.0 | 22.80 | 4.40 | 51.0 | 8.0 | 150.00 | SR M5X20DIN912 | HW 4.0 |
| FSHDR 25-8 | 8.00 | 25.50 | 25.0 | 25.0 | 22.30 | 5.40 | 51.5 | 8.0 | 170.00 | SR M6X25 DIN912 | HW 5.0 |

- Clamping torque for FSHDR-6: 7.5 Nxm, for FSHDR-8: 10 Nxm
- ⁽¹⁾ Cutting depth maximum

Insert Clamping Instructions

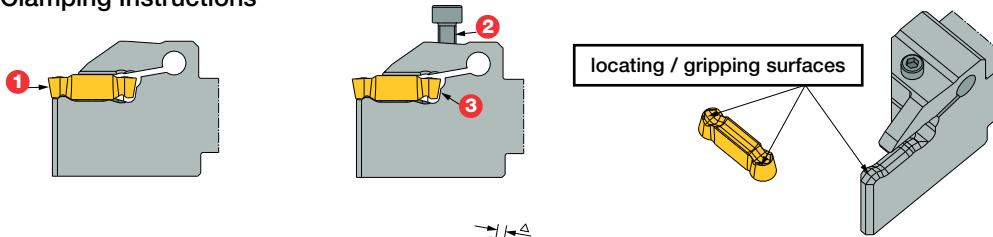

- 1 Position the insert in the pocket so the notch on the insert sits on top of the front bulge of the pocket.
- 2 Close the clamping screw.




Warning

- Do not apply force and do not hold the insert in place while closing the screw.
- There is no contact between the insert and pocket rear wall 3.



FSPA/FSMA

Full Radius Precision Inserts for Machining Aluminum at Medium to High Feeds

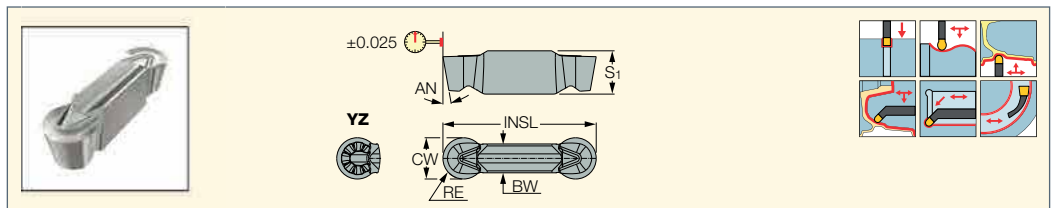

| Designation | Dimensions | | | | | | | | Tough ↔ Hard | | | Recommended Machining Data | |
|----------------------------------|-----------------------|----------------------|-------|------|------|-------|-------|------|--------------|-----|---------------------|----------------------------|-----------|
| | CW | CWTOL ⁽²⁾ | RE | S1 | BW | INSL | AN | IC20 | IC07 | ID5 | a _p (mm) | f turn (mm/rev) | |
| | FSPA 6.00-3.00 | 6.00 | 0.020 | 3.00 | 7.50 | 4.60 | 25.00 | 9.0 | ● | | | 0.05-3.00 | 0.30-0.55 |
| FSPA 6.00-3.00YZ | 6.00 | 0.020 | 3.00 | 7.50 | 4.60 | 25.00 | 9.0 | ● | | | 0.05-3.00 | 0.30-0.55 | |
| FSPA 6.00-3.00YZ-D | 6.00 | 0.020 | 3.00 | 7.50 | 4.60 | 25.00 | 9.0 | | | ● | 0.05-3.00 | 0.30-0.55 | |
| FSPA 80-40 | 8.00 | 0.020 | 4.00 | 8.40 | 5.60 | 29.70 | 10.0 | ● | | | 0.05-4.00 | 0.40-0.72 | |
| FSPA 80-40-D | 8.00 | 0.020 | 4.00 | 8.40 | 5.60 | 29.70 | 10.0 | | | ● | 0.05-4.00 | 0.40-0.72 | |
| FSPA 80-40YZ | 8.00 | 0.020 | 4.00 | 8.40 | 5.60 | 29.70 | 10.0 | ● | | | 0.05-4.00 | 0.40-0.72 | |
| FSPA 80-40YZ-D | 8.00 | 0.020 | 4.00 | 8.40 | 5.60 | 29.70 | 10.0 | | | ● | 0.05-4.00 | 0.40-0.72 | |
| FSMA 80-40 ⁽¹⁾ | 8.00 | 0.040 | 4.00 | 8.40 | 5.60 | 29.70 | 10.0 | | ● | | 0.05-4.00 | 0.40-0.72 | |


- ⁽¹⁾ Utility insert
- ⁽²⁾ Cutting width tolerance (+/-)



FIXGRIP

FGHDUR

Tools for Interrupted Cuts and Back Turning Aluminum Wheels

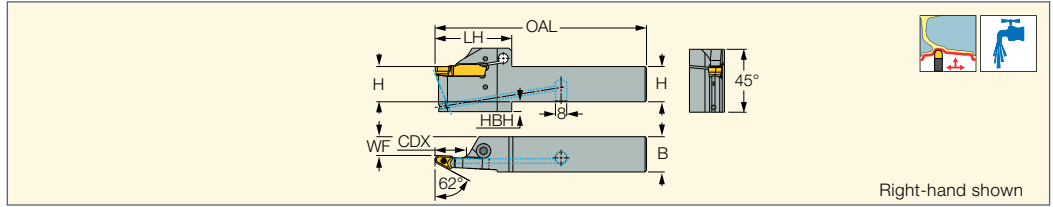

Right-hand shown


| Designation | CDX ⁽¹⁾ | H | B | OAL | WF | LH | HBH | | |
|--------------------------|--------------------|------|------|--------|-------|------|-----|-----------------|--------|
| FGHDUR 25C-3A-10S | 22.30 | 25.0 | 25.0 | 150.00 | 13.30 | 54.4 | 7.0 | SR M6X25 DIN912 | HW 5.0 |

- Upper jaw with hard coating to sustain chip deflection
- (1) Cutting depth maximum

FIXGRIP

FGPAM

V-Shaped Inserts for Machining Aluminum Wheels

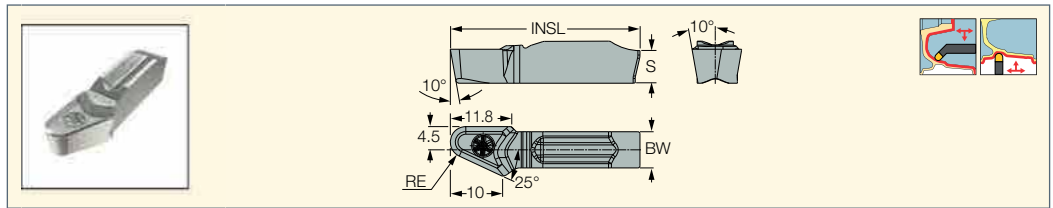


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|-------------------------|------------|------|------|-------|------------|------------|----------------------------|--|
| | RE | BW | S | INSL | a_p (mm) | | f turn (mm/rev) | |
| FGPAM 10S-3R-25A | 3.00 | 7.00 | 8.20 | 36.50 | ● | 0.05-12.00 | 0.40-0.72 | |

FIXGRIP

DTF50 FSHDR-8

CUT-GRIP Heads with Dovetail Connection for External Turning Aluminum Wheels

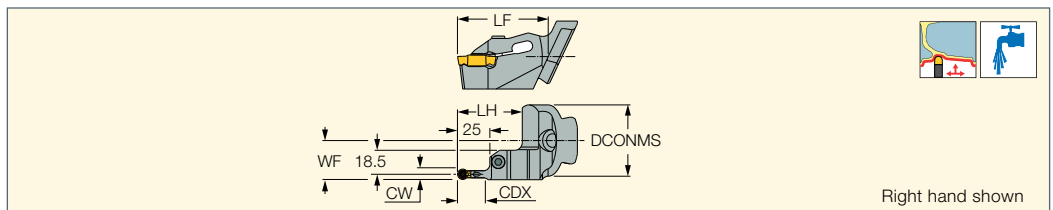

Right hand shown

| Designation | CW | CDX | LH | WF | LF | DCONMS | Insert |
|----------------------|------|-------|------|-------|-------|--------|-----------|
| DTF50 FSHDR-8 | 8.00 | 21.50 | 50.0 | 30.00 | 70.00 | 55.00 | FSPA 8... |


Spare Parts

| Designation | | |
|----------------------|----------------|---------------|
| DTF50 FSHDR-8 | SR M6X25DIN912 | HW 5.0X120 MM |



FIXGRIP

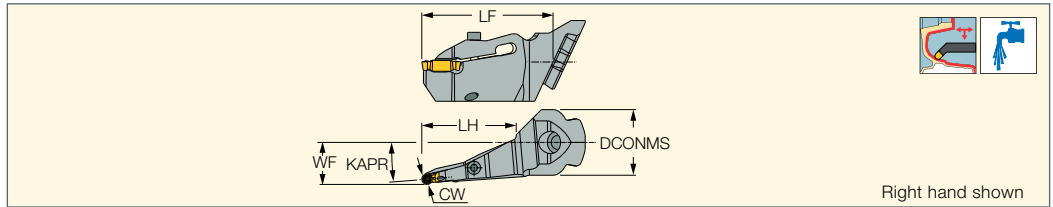


DTF50 FSHIUR
 CUT-GRIP Heads for Internal Profiling, Undercutting and Facing of Aluminum Wheels



| Designation | DMIN | CW | KAPR ⁽¹⁾ | LH | WF | LF | DCONMS | Insert |
|----------------------|--------|------|---------------------|------|-------|--------|--------|-----------|
| DTF50 FSHIUR-5A-8 | 250.00 | 8.00 | 5.0 | 72.0 | 32.00 | 100.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-8A-8 | 250.00 | 8.00 | 8.0 | 72.0 | 32.00 | 100.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-15A-8 | 250.00 | 8.00 | 15.0 | 80.0 | 36.00 | 100.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-22.5A-8 | 250.00 | 8.00 | 22.5 | 50.0 | 36.00 | 70.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-27.5A-8 | 250.00 | 8.00 | 27.5 | 60.0 | 40.00 | 80.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-45A-8 | 250.00 | 8.00 | 45.0 | - | 55.00 | 70.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-67.5A-8 | 250.00 | 8.00 | 67.5 | - | 60.00 | 70.00 | 50.00 | FSPA 8... |
| DTF50 FSHIUR-80A-8 | 250.00 | 8.00 | 80.0 | - | 60.00 | 70.00 | 50.00 | FSPA 8... |


⁽¹⁾ Tool cutting edge angle

Spare Parts

| Designation |  |  |  |
|----------------------|---|--|---|
| DTF50 FSHIUR-5A-8 | SR M6X25DIN912 | SR M5X6 DIN913 | HW 5.0X120 MM |
| DTF50 FSHIUR-8A-8 | SR M6X25DIN912 | SR M6X6 DIN913 | HW 5.0X120 MM |
| DTF50 FSHIUR-15A-8 | SR M6X25DIN912 | SR M6X6 DIN913 | HW 5.0X120 MM |
| DTF50 FSHIUR-22.5A-8 | SR M6X25DIN912 | | HW 5.0X120 MM |
| DTF50 FSHIUR-27.5A-8 | SR M6X25DIN912 | | HW 5.0X120 MM |
| DTF50 FSHIUR-45A-8 | SR M6X25DIN912 | | HW 5.0X120 MM |
| DTF50 FSHIUR-67.5A-8 | SR M6X25DIN912 | SR M5X6 DIN913 | HW 5.0X120 MM |
| DTF50 FSHIUR-80A-8 | SR M6X25DIN912 | | HW 5.0X120 MM |



ISOTURN

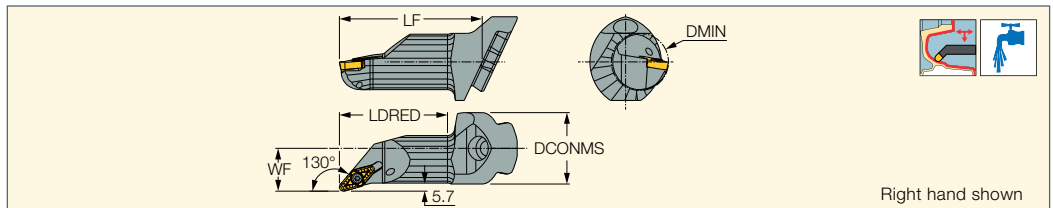DTF50 SVXCR-22
 ISO Boring Heads with Dovetail Connection VCGT 22 Inserts for Machining Aluminum Wheels



| Designation | DMIN | WF | LF | LDRED | DCONMS | Insert |
|----------------|-------|-------|--------|-------|--------|------------|
| DTF50 SVXCR-22 | 40.00 | 30.00 | 100.00 | 76.0 | 50.00 | VCGT 22... |

Spare Parts


| Designation |  |  |
|----------------|---|---|
| DTF50 SVXCR-22 | SR 16-212 | T-20/5 |



ISOTURN



DTF50 SVXCR-16X2

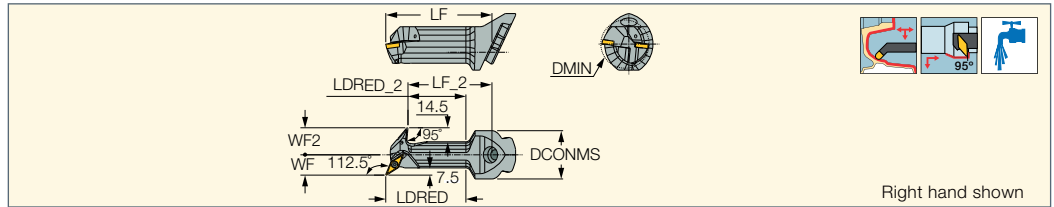ISO Double Pocket Boring Heads with Dovetail Connection
VCGT 16 Inserts for Machining Aluminum Wheels



| Designation | DMIN | WF | WF2 | LF | LF_2 | LDRED | LDRED_2 | DCONMS | Insert |
|------------------|-------|-------|------|--------|-------|-------|---------|--------|------------|
| DTF50 SVXCR-16X2 | 50.00 | 21.00 | 28.0 | 110.00 | 87.00 | 83.0 | 60.0 | 50.00 | VCGT 16... |


Spare Parts

| Designation |  |  |
|------------------|---|---|
| DTF50 SVXCR-16X2 | SR 16-236 | T-15/5 |

VDI

VDI-DTF50E-L60R

QUICK-CHANGE Holder with a Dovetail Connection for External Turning Aluminum Wheels with CUT-GRIP Heads

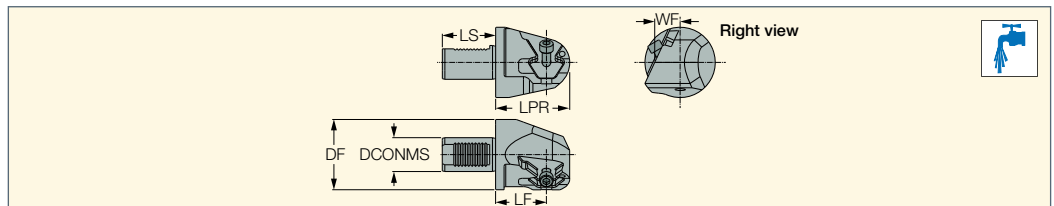

| Designation | WF | LF | LPR | LS | DF | DCONMS |
|----------------------------------|-------|-------|-------|------|-------|--------|
| VDI40-DTF50E-L60R | 30.00 | 60.00 | 87.50 | 63.0 | 83.00 | 40.00 |
| VDI50-DTF50E-L60R ⁽¹⁾ | 37.00 | 60.00 | 87.50 | 78.0 | 98.00 | 50.00 |

⁽¹⁾ on request


Spare Parts

| Designation |  |  |  |
|-----------------|---|---|---|
| VDI-DTF50E-L60R | SR M10X45 DIN912 | HW8 L208 | OR 5X1N |

VDI

VDI-DTF50


QUICK-CHANGE Holder with Dovetail Connection Internal Turning Aluminum Wheels with CUT-GRIP and ISOTURN Heads

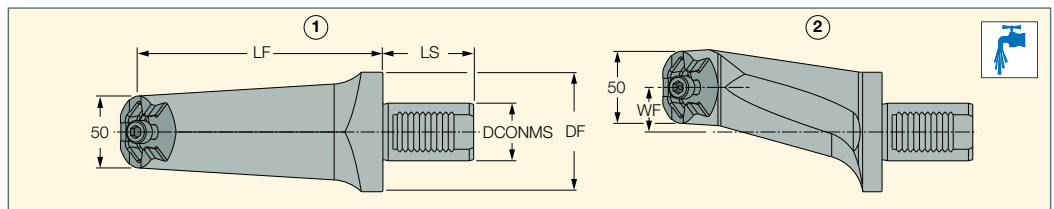

| Designation | WF | LF | LS | DF | DCONMS | Fig. |
|------------------------------------|-------|--------|------|-------|--------|------|
| VDI40-DTF50F31L140R | 31.00 | 140.00 | 63.0 | 83.00 | 40.00 | 2 |
| VDI40-DTF50L110 | 0.00 | 110.00 | 63.0 | 83.00 | 40.00 | 1 |
| VDI40-DTF50L140 | 0.00 | 140.00 | 63.0 | 83.00 | 40.00 | 1 |
| VDI40-DTF50L170 | 0.00 | 170.00 | 63.0 | 83.00 | 40.00 | 1 |
| VDI50-DTF50F31L140R ⁽¹⁾ | 31.00 | 140.00 | 78.0 | 98.00 | 50.00 | 2 |
| VDI50-DTF50L110 ⁽¹⁾ | 0.00 | 110.00 | 78.0 | 98.00 | 50.00 | 1 |
| VDI50-DTF50L140 ⁽¹⁾ | 0.00 | 140.00 | 78.0 | 98.00 | 50.00 | 1 |
| VDI50-DTF50L170 ⁽¹⁾ | 0.00 | 170.00 | 78.0 | 98.00 | 50.00 | 1 |

⁽¹⁾ on request

Spare Parts


| Designation |  |  |
|-------------|---|---|
| VDI-DTF50 | SR M10X45 DIN912 | HW8 L208 |



ISOTURN

SVJCR/L

93° Lead Angle Screw Lock
Tools Carrying 35° Diamond
Inserts with 7° Clearance Angle

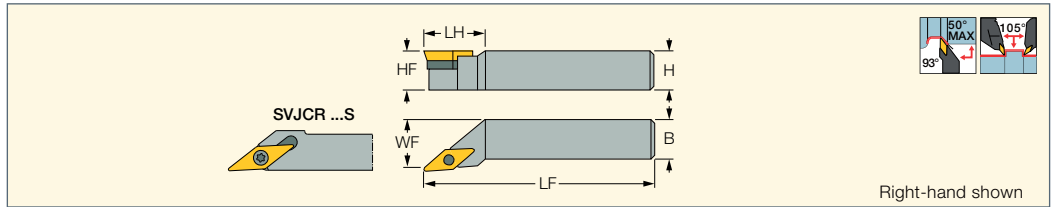


Right-hand shown

| Designation | H | HF | B | LF | LH | WF | Insert | | | | | |
|----------------------------------|------|------|------|--------|------|-------|----------|-------------|--------|---------|---------|--------|
| SVJCR/L 0808K-11S ⁽¹⁾ | 8.0 | 8.0 | 8.0 | 125.00 | 11.5 | 8.20 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 1010K-11S ⁽¹⁾ | 10.0 | 10.0 | 10.0 | 125.00 | 22.0 | 10.20 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 1212K-11S ⁽¹⁾ | 12.0 | 12.0 | 12.0 | 125.00 | - | 12.20 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 1616K-11 | 16.0 | 16.0 | 16.0 | 125.00 | 25.0 | 20.00 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 2020K-11 | 20.0 | 20.0 | 20.0 | 125.00 | 30.0 | 25.00 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 2525M-11 | 25.0 | 25.0 | 25.0 | 150.00 | 30.0 | 32.00 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVJCR/L 2020K-16 | 20.0 | 20.0 | 20.0 | 125.00 | 30.0 | 25.00 | VC..1604 | SR 16-236 P | T-15/5 | TVC 3-1 | SR TC-3 | HW 2.5 |
| SVJCR/L 2525M-16 | 25.0 | 25.0 | 25.0 | 150.00 | 30.0 | 32.00 | VC..1604 | SR 16-236 P | T-15/5 | TVC 3-1 | SR TC-3 | HW 2.5 |

⁽¹⁾ For Swiss-type machines

ISOTURN JETCUT

SVJCR/L-16-JHP
Screw Lock Tools with Channels
for High-Pressure Coolant
Carrying 35° Rhombic Inserts
with 7° Clearance Angle

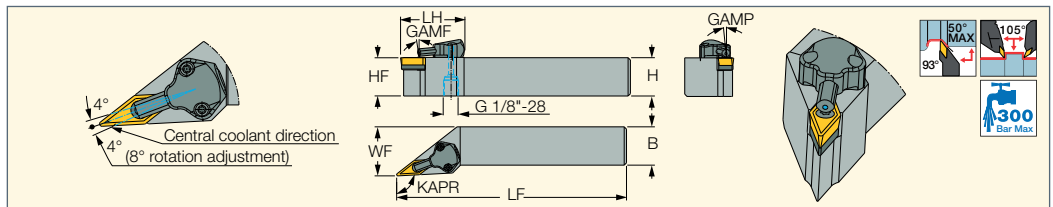

| Designation | H | B | HF | LF | LH | WF | KAPR ⁽¹⁾ | GAMP | GAMF | Insert |
|----------------------|------|------|------|--------|------|-------|---------------------|------|------|-----------|
| SVJCR/L 2525M-16-JHP | 25.0 | 25.0 | 25.0 | 150.00 | 42.0 | 32.00 | 93.0 | 0.0 | 0.0 | VCMT 1604 |

⁽¹⁾ Tool cutting edge angle


Spare Parts

| Designation | | | | | | | |
|----------------------|---------|---------|-------------|----------|--------|--------|-------|
| SVJCR/L 2525M-16-JHP | TVC 3-1 | SR TC-3 | SR 16-236 P | CU-V-JHP | T-15/5 | HW 2.5 | T-8/5 |

ISOTURN

SVVCN

72.5° Lead Angle Screw Lock
Tools Carrying 35° Diamond
Inserts with 7° Clearance Angle

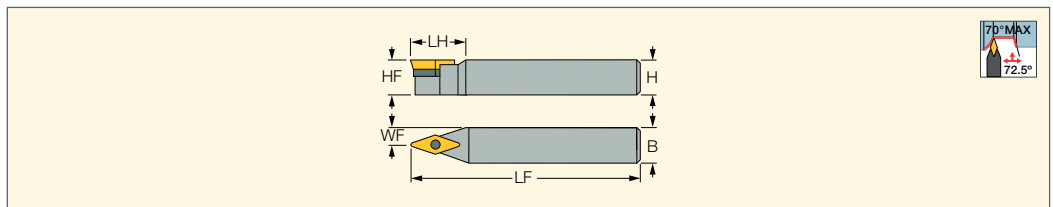

| Designation | H | HF | B | LF | LH | WF | Insert | | | | | |
|--------------------------------|------|------|------|--------|------|-------|----------|-------------|--------|---------|---------|--------|
| SVVCN 0808K-11S ⁽¹⁾ | 8.0 | 8.0 | 8.0 | 125.00 | - | 4.30 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVVCN 1010K-11S ⁽¹⁾ | 10.0 | 10.0 | 10.0 | 125.00 | - | 5.30 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVVCN 1212K-11S ⁽¹⁾ | 12.0 | 12.0 | 12.0 | 125.00 | - | 6.30 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVVCN 1616K-11S ⁽¹⁾ | 16.0 | 16.0 | 16.0 | 125.00 | - | 8.30 | VC..1103 | SR 14-560 | T-8/5 | | | |
| SVVCN 2020K-16 | 20.0 | 20.0 | 20.0 | 125.00 | 34.0 | 10.00 | VC..1604 | SR 16-236 P | T-15/5 | TVC 3-1 | SR TC-3 | HW 2.5 |
| SVVCN 2525M-16 | 25.0 | 25.0 | 25.0 | 150.00 | 38.1 | 12.50 | VC..1604 | SR 16-236 P | T-15/5 | TVC 3-1 | SR TC-3 | HW 2.5 |


⁽¹⁾ For Swiss-type machines



ISOTURN

SVXCR/L

112° Lead Angle Screw Lock Tools Carrying 35° Diamond Inserts with 7° Clearance Angle

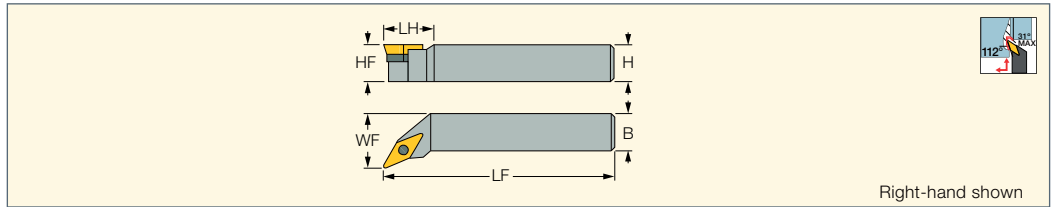


Right-hand shown

| Designation | H | HF | B | LF | LH | WF | Insert | | | | | |
|------------------|------|------|------|--------|------|-------|----------|---------|---------|--------|-------------|--------|
| SVXCR/L 2020K-16 | 20.0 | 20.0 | 20.0 | 125.00 | 25.0 | 25.00 | VC..1604 | TVC 3-1 | SR TC-3 | HW 2.5 | SR 16-236 P | T-15/5 |
| SVXCR/L 2525M-16 | 25.0 | 25.0 | 25.0 | 150.00 | 30.0 | 32.00 | VC..1604 | TVC 3-1 | SR TC-3 | HW 2.5 | SR 16-236 P | T-15/5 |

ISOTURN

A/S-SVQCR/L

Screw Lock Boring Bars Carrying 35° Rhombic Inserts with 7° Clearance

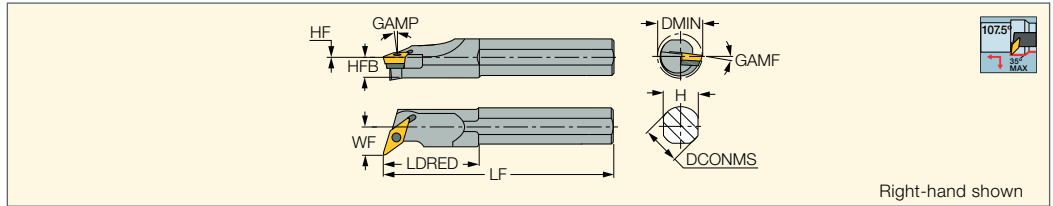

Right-hand shown

| Designation | DCONMS | LF | LDRED | H | HFB | WF | HF | DMIN | GAMP | GAMF | CSP ⁽¹⁾ | Insert |
|-----------------|--------|--------|-------|------|------|-------|-----|-------|------|------|--------------------|-----------|
| S25S SVQCR/L-16 | 25.00 | 250.00 | 61.0 | 23.0 | 12.0 | 17.00 | 0.5 | 32.00 | 0.0 | -5.0 | 0 | VC.. 1604 |
| S32T SVQCR/L-16 | 32.00 | 300.00 | 70.0 | 30.0 | 15.0 | 22.00 | 0.0 | 40.00 | 0.0 | -5.0 | 0 | VC.. 1604 |
| A40U SVQCR/L-22 | 40.00 | 350.00 | 64.0 | 36.0 | 18.0 | 27.00 | 0.0 | 47.50 | 0.0 | -8.0 | 1 | VCQT 2205 |

⁽¹⁾ 0 - Without coolant supply, 1 - With coolant supply


Spare Parts

| Designation | | | | | | |
|-----------------|-------------|--------|------------|----------|--------|-------|
| S25S SVQCR/L-16 | SR 16-236 P | T-15/5 | | | | |
| S32T SVQCR/L-16 | SR 16-236 P | T-15/5 | TVC 3-1P | SR TC-3P | HW 4.0 | |
| A40U SVQCR/L-22 | SR 14-536 | T-20/5 | TVC 22T330 | SR TC-3 | HW 2.5 | PL 40 |

ISOTURN

A/S-SVLFCR/L; A-SVUCR/L

Screw Lock Boring Bars Carrying 35° Rhombic Inserts with 7° Clearance

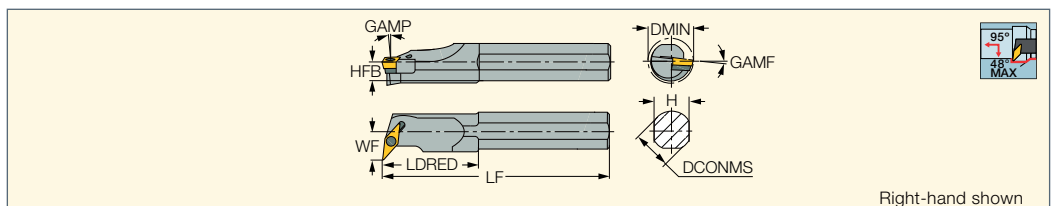

Right-hand shown

| Designation | DCONMS | LF | LDRED | H | HFB | WF | DMIN | GAMP | GAMF | CSP ⁽²⁾ | Insert |
|--------------------------------|--------|--------|-------|------|------|-------|-------|------|------|--------------------|-----------|
| A32T SVUCR/L-16 ⁽¹⁾ | 32.00 | 300.00 | 50.0 | 29.0 | 14.5 | 22.00 | 40.00 | 0.0 | -8.0 | 1 | VC.. 1604 |
| S32T SVLFCR/L-16 | 32.00 | 300.00 | 56.0 | 29.0 | 14.5 | 22.00 | 39.50 | 0.0 | -8.0 | 0 | VC.. 1604 |
| S40U SVLFCR/L-16 | 40.00 | 350.00 | - | 36.0 | 18.0 | 27.00 | 49.00 | 0.0 | -5.0 | 0 | VC.. 1604 |
| A40U SVLFCR/L-22 | 40.00 | 350.00 | 70.0 | 36.0 | 18.0 | 27.00 | 48.00 | 0.0 | -8.0 | 1 | VC.. 2205 |

⁽¹⁾ 93° approach angle

⁽²⁾ 0 - Without coolant supply, 1 - With coolant supply

Spare Parts

| Designation | | | | | | | |
|-----------------|------------|----------|--------|--------|-------------|-------|--------|
| A32T SVUCR/L-16 | TVC 3-1P | SR TC-3P | HW 1.5 | HW 4.0 | SR 16-236 P | PL 32 | T-15/5 |
| S32T SVLFCR-16 | TVC 3-1P | SR TC-3P | HW 4.0 | | SR 16-236 P | | T-15/5 |
| S32T SVLFCR-16 | TVC 3-1P | SR TC-3P | HW 4.0 | | SR 16-236 P | | T-15/5 |
| S40U SVLFCR-16 | TVC 3-1P | SR TC-3P | HW 4.0 | | SR 16-236 P | | T-15/5 |
| S40U SVLFCR-16 | TVC 3-1P | SR TC-3P | HW 4.0 | | SR 16-236 P | | T-15/5 |
| A40U SVLFCR-22 | TVC 22T330 | SR TC-3 | HW 2.5 | | SR 14-536 | PL 40 | T-20/5 |
| A40U SVLFCR-22 | TVC 22T330 | SR TC-3 | HW 2.5 | | SR 14-536 | PL 40 | T-20/5 |

Scan the QR code for additional information.


Enter the item description in the search field to access additional related data.



ISOTURN

A/S-SVLBCR/L

Screw Lock Back Boring
Bars Carrying 35° Rhombic
Inserts with 7° Clearance

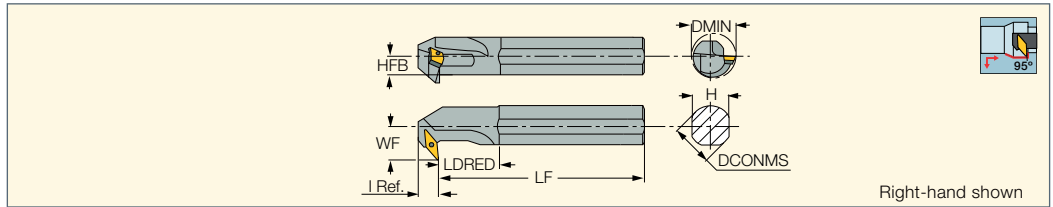

| Designation | DCONMS | LF | LDRED | I Ref. | H | HFB | WF | DMIN | CSP ⁽¹⁾ | Insert |
|-------------------------|--------|--------|-------|--------|------|------|-------|-------|--------------------|-----------|
| A32T SVLBCL-16 | 32.00 | 300.00 | 76.5 | 18.50 | 29.0 | 14.5 | 27.50 | 40.00 | 1 | VC.. 1604 |
| A32T SVLBCR-16 | 32.00 | 300.00 | 76.5 | 18.50 | 29.0 | 14.5 | 27.50 | 40.00 | 0 | VC.. 1604 |
| S32T SVLBCR/L-16 | 32.00 | 300.00 | 63.2 | 18.50 | 29.0 | 14.5 | 22.00 | 40.00 | 0 | VC.. 1604 |
| S40U SVLBCR/L-16 | 40.00 | 350.00 | 60.0 | 20.00 | 36.0 | 18.0 | 27.00 | 49.50 | 0 | VC.. 1604 |

⁽¹⁾ 0 - Without coolant supply, 1 - With coolant supply


Spare Parts

| Designation | | | | | |
|---------------------|----------|----------|--------|-------------|--------|
| A/S-SVLBCR/L | TVC 3-1P | SR TC-3P | HW 4.0 | SR 16-236 P | T-15/5 |

ISOTURN

VCGT-AS

35° Rhombic Inserts with a 7°
Positive Flank, Very Positive
Rake Angle and Sharp Cutting
Edge for Machining Aluminum

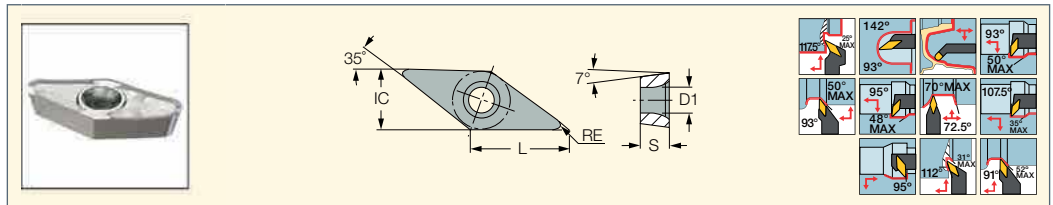

| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|-----------------------|------------|-------|------|------|------|------------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| VCGT 110302-AS | 11.10 | 6.35 | 3.18 | 0.20 | 2.90 | ● | 0.20-2.50 | 0.05-0.20 | |
| VCGT 110304-AS | 11.10 | 6.35 | 3.18 | 0.40 | 2.90 | ● | 0.50-3.00 | 0.05-0.25 | |
| VCGT 160401-AS | 16.60 | 9.52 | 4.76 | 0.10 | 4.40 | ● | 0.20-2.50 | 0.05-0.20 | |
| VCGT 160402-AS | 16.60 | 9.52 | 4.76 | 0.20 | 4.40 | ● | 0.50-2.50 | 0.05-0.25 | |
| VCGT 160404-AS | 16.60 | 9.52 | 4.76 | 0.40 | 4.40 | ● | 0.50-3.00 | 0.05-0.25 | |
| VCGT 160408-AS | 16.60 | 9.52 | 4.76 | 0.80 | 4.40 | ● | 0.50-3.00 | 0.10-0.25 | |
| VCGT 160412-AS | 16.60 | 9.52 | 4.76 | 1.20 | 4.40 | ● | 0.50-3.00 | 0.10-0.25 | |
| VCGT 220530-AS | 22.10 | 12.70 | 5.56 | 3.00 | 5.50 | ● | 1.50-4.50 | 0.15-0.30 | |


• For user guide and cutting speed recommendations, see pages 4-5,26



ISOTURN

VCGT-AF

Inserts with a Very Positive Rake Angle and Sharp Cutting Edge for Semi-Finishing and Finishing on Aluminum

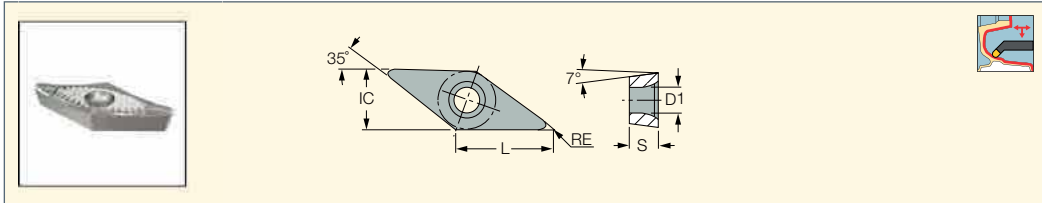


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a_p (mm) | | f (mm/rev) | |
| VCGT 220508-AF | 22.10 | 12.70 | 5.56 | 0.80 | 5.50 | ● | 1.00-4.50 | 0.10-0.25 | |
| VCGT 220512-AF | 22.10 | 12.70 | 5.56 | 1.20 | 5.50 | ● | 1.00-4.50 | 0.10-0.30 | |
| VCGT 220516-AF | 22.10 | 12.70 | 5.56 | 1.60 | 5.50 | ● | 1.50-4.50 | 0.10-0.35 | |

• For user guide and cutting speed recommendations, see pages 4-5,26

ISOTURN

VCGT-DW (PCD)

Inserts with 7° Clearance and a Single PCD Top Corner Tip Chipformer for Machining Aluminum

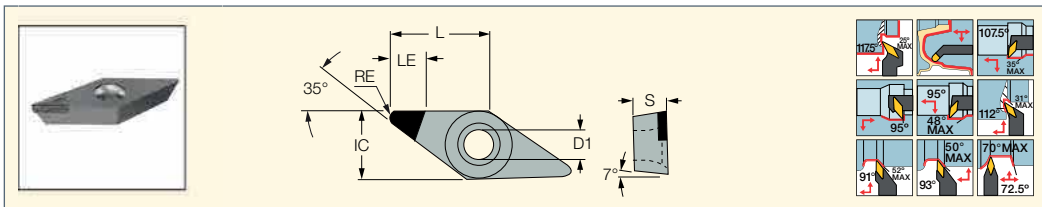


| Designation | Dimensions | | | | | | | ID5 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|------|------------|-----------|----------------------------|--|
| | L | IC | S | RE | LE | D1 | a_p (mm) | | f (mm/rev) | |
| VCGT 160404-DW | 16.60 | 9.52 | 4.76 | 0.40 | 6.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 | |
| VCGT 160408-DW | 16.60 | 9.52 | 4.76 | 0.80 | 6.40 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 | |
| VCGT 160412-DW | 16.60 | 9.52 | 4.76 | 1.20 | 6.30 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 | |
| VCGT 220516-DW | 22.10 | 12.70 | 5.56 | 1.60 | 6.30 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 | |
| VCGT 220520-DW | 22.10 | 12.70 | 5.56 | 2.00 | 6.20 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 | |
| VCGT 220530-DW | 22.10 | 12.70 | 5.56 | 3.00 | 6.00 | 5.50 | ● | 0.10-3.00 | 0.05-0.30 | |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31

ISOTURN

VCGT (PCD)

35° Rhombic Single Brazed Tip Corner Inserts for Aluminum Finishing (PCD)

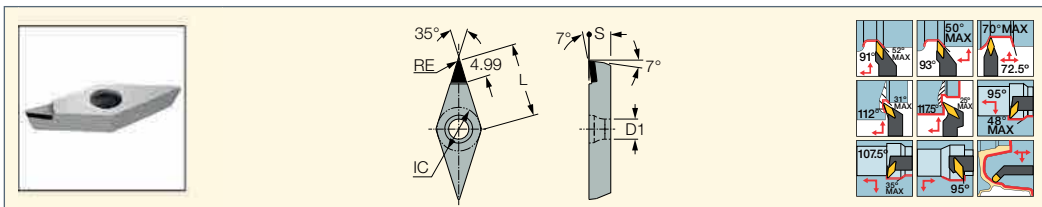


| Designation | Dimensions | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|-------|------|-----|----------------------------|------------|
| | IC | S | RE | L | D1 | | a_p (mm) | f (mm/rev) |
| VCGT 160404D | 9.52 | 4.76 | 0.40 | 16.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |
| VCGT 160408D | 9.52 | 4.76 | 0.80 | 16.60 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |

• For user guide and cutting speed recommendations, see pages 4-5,27-28,31



ISOTURN JETCUT

SVHNR/L-AL-JHP
Screw Lock Tools with Channels
for High-Pressure Coolant
Carrying 35° Rhombic Inserts

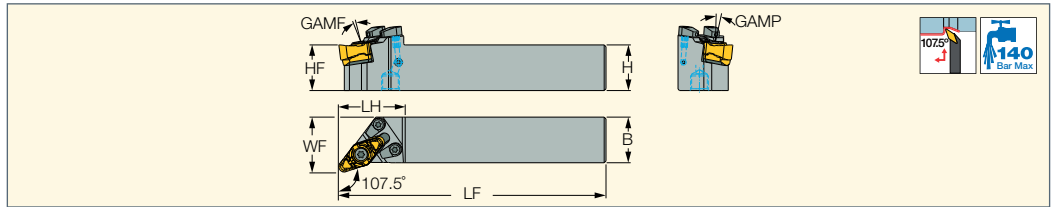

| Designation | H | B | HF | LF | LH | WF | GAMP | GAMF | MIID ⁽¹⁾ |
|--------------------------------|------|------|------|--------|------|-------|------|------|---------------------|
| SVHNR/L 2525M-22-AL-JHP | 25.0 | 25.0 | 25.0 | 146.34 | 36.3 | 30.03 | 7.0 | 6.0 | VNGU 220630-R3N |

⁽¹⁾ Master insert identification


Spare Parts

| Designation | | | | | | | | | |
|--------------------------------|-------------------------|----------------|----------|------------|--------|---------|-------------------|--------------------------|--------------------------|
| SVHNR/L 2525M-22-AL-JHP | TVX 2230 ^(a) | SR 14-591/L-SN | SW6-T-SH | BLD T20/S7 | HW 3.0 | SR TC-4 | CH-1.9D-JHP-A SET | TVX 2212 ^{(b)*} | TVX 2216 ^{(c)*} |

- * Optional, to be ordered separately
- ^(a) For VNGU 220630-R3N insert
- ^(b) For VNGU 220612-R3N insert
- ^(c) For VNGU 220616-R3N insert

ISOTURN JETCUT

SVVNN-AL-JHP
Screw Lock Tools with Channels
for High-Pressure Coolant
Carrying 35° Rhombic Inserts

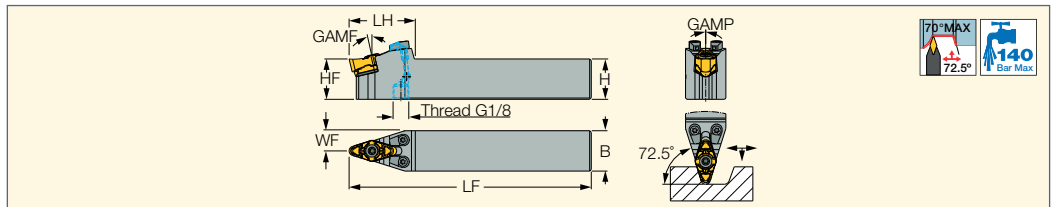


| Designation | H | HF | B | LF | LH | WF | GAMP | GAMF | MIID ⁽¹⁾ |
|------------------------------|------|------|------|--------|------|-------|------|-------|---------------------|
| SVVNN 2525M-22-AL-JHP | 25.0 | 25.0 | 25.0 | 150.00 | 41.0 | 12.50 | 0.0 | -13.5 | VNGU 220630-R3N |

⁽¹⁾ Master insert identification

Spare Parts


| Designation | | | | | | | | | |
|------------------------------|-------------------------|--------|------------|----------|---------|----------------|-------------------|--------------------------|--------------------------|
| SVVNN 2525M-22-AL-JHP | TVX 2230 ^(a) | HW 3.0 | BLD T20/S7 | SW6-T-SH | SR TC-4 | SR 14-591/L-SN | CH-1.9D-JHP-A SET | TVX 2212 ^{(b)*} | TVX 2216 ^{(c)*} |

- * Optional, to be ordered separately
- ^(a) For VNGU 220630-R3N insert
- ^(b) For VNGU 220612-R3N insert
- ^(c) For VNGU 220616-R3N insert

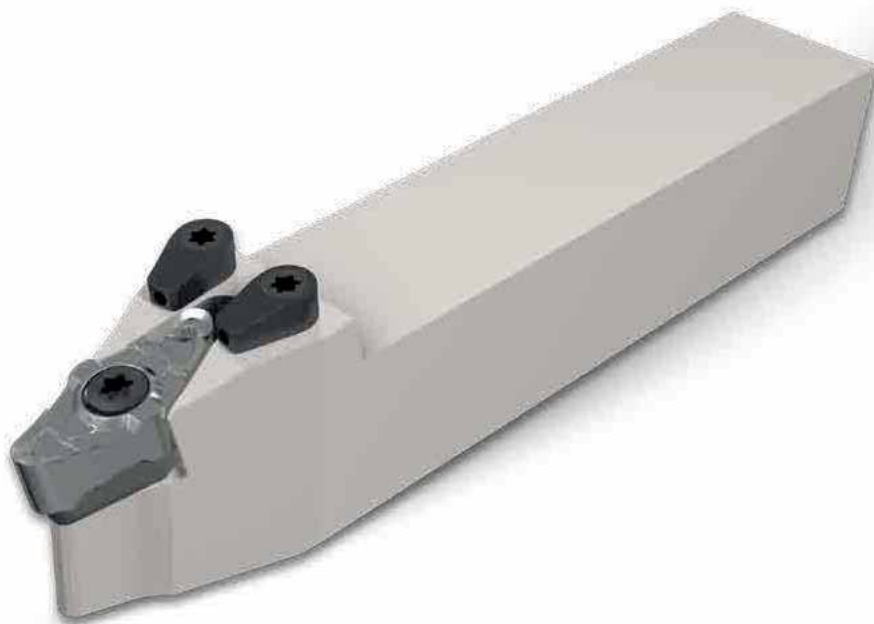

ISOTURN

A-SVQNR/L-AL-JHP
Screw Lock Boring Bars
Carrying 35° Rhombic Inserts

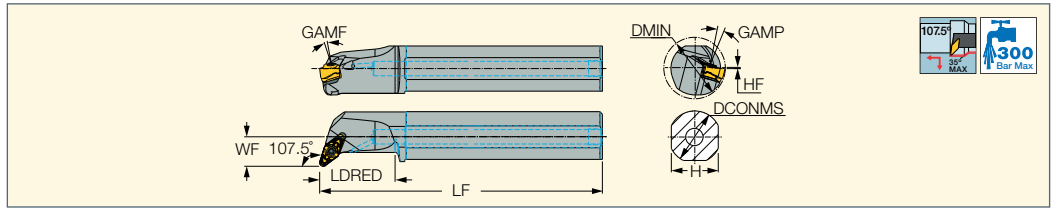

| Designation | DCONMS | LF | LDRED | H | HF | WF | DMIN | GAMP | GAMF | MIID ⁽¹⁾ |
|-------------------------------|--------|--------|-------|------|-----|-------|-------|------|------|---------------------|
| A40U SVQNR/L-22-AL-JHP | 40.00 | 348.10 | 60.0 | 36.0 | 0.1 | 23.40 | 49.00 | 14.5 | 6.5 | VNGU 220630-R3N |

⁽¹⁾ Master insert identification

Spare Parts

| Designation | | | | | | | | | |
|-------------------------------|-------------------------|----------------|--------|----------|------------|-------|---------|--------------------------|--------------------------|
| A40U SVQNR/L-22-AL-JHP | TVX 2230 ^(a) | SR 14-591/L-SN | HW 3.0 | SW6-T-SH | BLD T20/S7 | PL 40 | SR TC-4 | TVX 2212 ^{(b)*} | TVX 2216 ^{(c)*} |

* Optional, to be ordered separately

^(a) For VNGU 220630-R3N insert


^(b) For VNGU 220612-R3N insert

^(c) For VNGU 220616-R3N insert

ISOTURN

ALUPTURN
POSITIVE DOUBLE SIDED

VNGU-R3N
Double-Sided Sharp Edged
Positive Rake Inserts for Rough
Machining Aluminum and
Other Non-Ferrous Materials

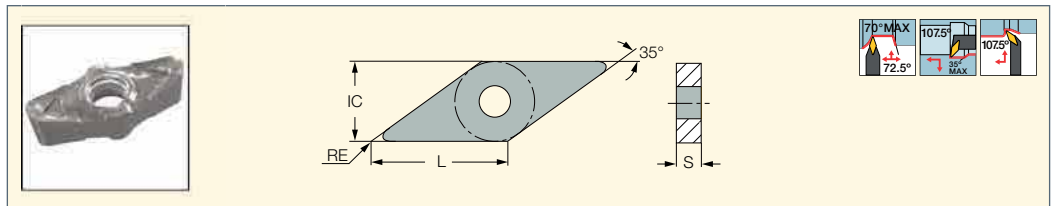


| Designation | Dimensions | | | | | IC20 | Recommended Machining Data | |
|------------------------|------------|-------|------|------|------------------------|-----------|----------------------------|--|
| | L | IC | S | RE | a _p (mm) | | f (mm/rev) | |
| VNGU 220612-R3N | 22.00 | 12.70 | 6.77 | 1.20 | ● | 1.00-4.50 | 0.10-0.30 | |
| VNGU 220616-R3N | 22.00 | 12.70 | 6.51 | 1.60 | ● | 1.50-4.50 | 0.10-0.35 | |
| VNGU 220630-R3N | 22.00 | 12.70 | 6.35 | 3.00 | ● | 1.50-4.50 | 0.15-0.40 | |






• For user guide and cutting speed recommendations, see pages 4-5,26

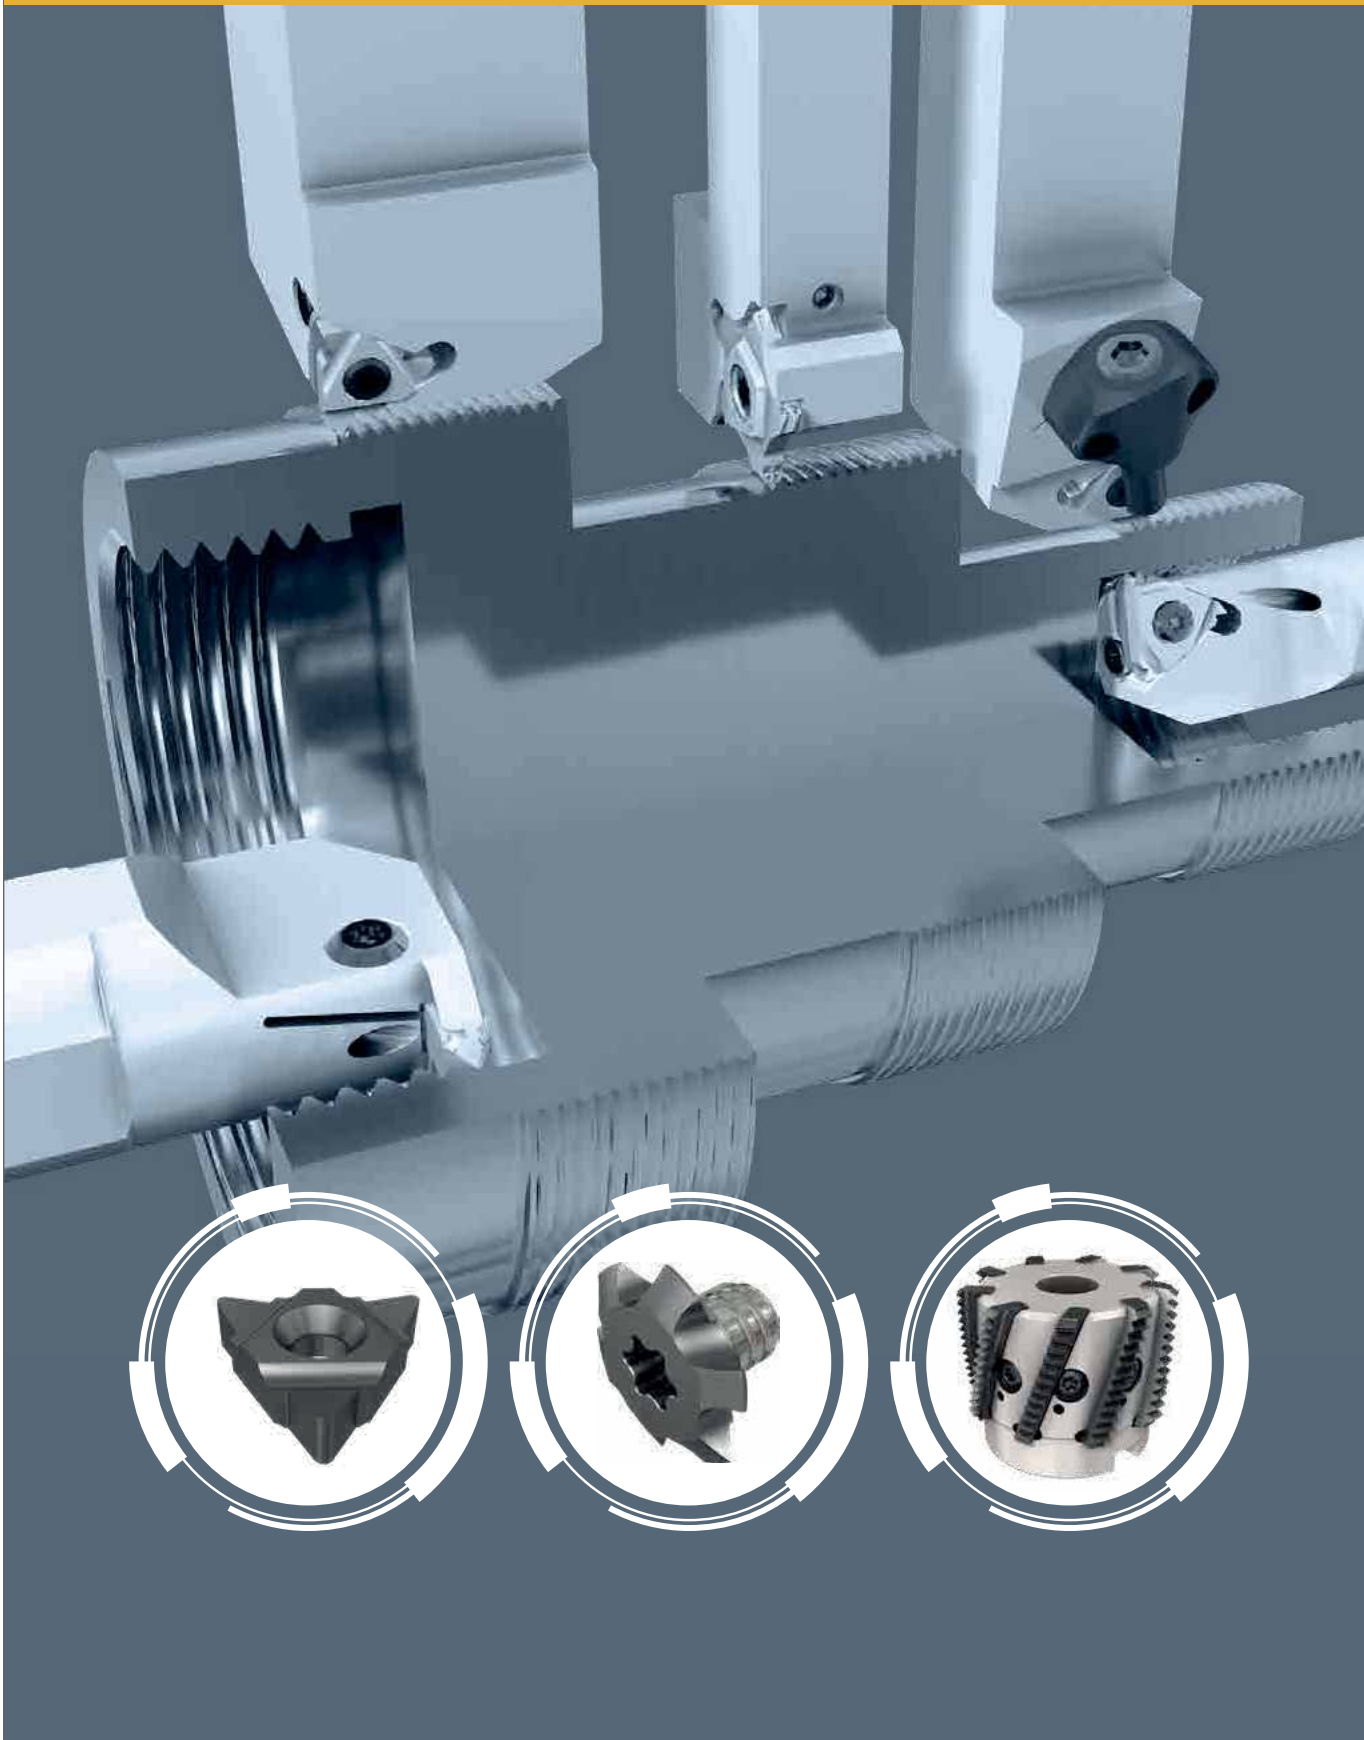

Threading






Main Type Laydown Inserts





| | B/M-TYPE | U-TYPE | REGULAR TYPE | MULTI-TOOTH |
|---|---|---|--|---|
|  |  ISCARTHREAD |  ISCARTHREAD |  ISCARTHREAD |  ISCARTHREAD |



Additional Threading Systems

External


| CUT-GRIP External | |
|---|---|
|  |  ISCARTHREAD CUTGRIP |
|  |  |

| SWISSCUT External | |
|---|--|
|  |  |
| |  |




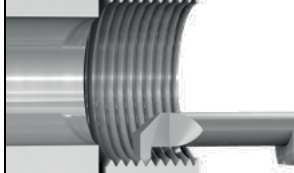
| PENTACUT External | |
|---|---|
|  |  |
|  |  |

-  partial profile
-  full profile




Internal

| MINICHAM Internal | |
|---|---|
|  |  ISCARTHREAD MINICHAM |
| |  |




minimum bore dia. 4 mm

| PICCOCUT Mini-Bar | |
|--|--|
|  |  |
|  |  |

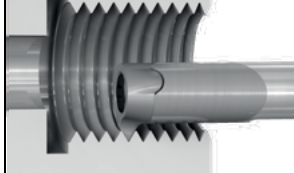minimum bore dia. 2.4 mm

| CHAMGROOVE Internal | |
|---|---|
|  |  |
| |  |

minimum bore dia. 8.0 mm

| CUT-GRIP Internal | |
|---|--|
|  |  ISCARTHREAD CUTGRIP |
| |  |

minimum bore dia. 12.5 mm

| | |
|---|--|
|  |  ISCARTHREAD CUTGRIP |
| |  |

minimum bore dia. 20 mm

-  partial profile
-  full profile

Thread Milling



SOLIDTHREAD
MTEC, MTECB MTECZ, MTECQ



SOLIDTHREAD
MTECS, MTECD, MTECSH



SOLIDTHREAD
MTECI



MULTI-MASTER
MM TRD



MULTI-MASTER
MM TRF



MULTI-MASTER
MT-...-MM



T-SLOT
SD TRD



MILLTHREAD Endmill
MTE



MILLTHREAD Endmill
MTSRH



MILLTHREAD Endmill
MTSR M.I. S.P



MILLTHREAD Endmill
MTSR M.I. S.P.-U



MILLTHREAD Endmill
MTET



MILLTHREAD Shell Mill
MTF-MULTI




MILLTHREAD Shell Mill
MTSRH



MILLTHREAD Shell Mill
MTFLE

Tap Selection Guide and Cutting Speed Recommendations

| Hole Type ⁽⁴⁾ | | | | | tap color code ⁽¹⁾ | W ⁽¹⁾ | M | M | M | M | M | M | N | H | F |
|---|---|---|---|---|---|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-----------|
|  | | | | | tool material ⁽¹⁾ | HSS | HSS-E | HSS-E | HSS-E | HSS-E | HSS-E | HSS-E | HSS-E | HSS-E | HSS-E |
| | | | | | surface treatment/coating ⁽²⁾ | - | - | TI | ST | - | TI | ST | ST | ST | TI |
| | | | | | flute hand and angle | - | - | - | - | R40° | R40° | R40° | R40° | R40° | - |
| | | | | | lead according to DIN 2197 ⁽³⁾ | 1\2\3 | B | B | B | C | C | C | C | C | C |
| 1 | 2 | 3 | 4 | 5 | Hole Type ⁽⁴⁾ | 1-2-3-4-5 | 4-5 | 4-5 | 4-5 | 1-2-3 | 1-2-3 | 1-2-3 | 1-2-3 | 1-2-3 | 1-2-3-4-5 |


| Material No. | Material | Condition | Hardness HB | Chip | Coolant | m/min | | | | | | | | | | | | | | |
|--------------|---------------------|------------------------------|-------------|-----------|---------|---------|---------|---------|----------|---------|---------|----------|----------|-------|-------|-------|-------|-------|-------|--|
| | | | | | | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | m/min | |
| 21 | aluminum- | not cureable | 60 | medium | T | • 25-35 | • 50-70 | • 12-25 | •• 25-35 | • 30-60 | • 12-25 | •• 12-25 | •• 25-35 | •• | | | | | | |
| 22 | wrought alloy | cured | 100 | medium | T | • 25-35 | • 50-70 | • 12-25 | •• 25-35 | • 30-60 | • 12-25 | •• 12-25 | •• 25-35 | •• | | | | | | |
| 23 | aluminum- <=12% Si | not cureable | 75 | short | T | • 10-15 | • 10-40 | • 10-25 | •• 10-15 | • 15-40 | • 10-25 | •• 10-25 | •• 10-15 | •• | | | | | | |
| 24 | cast, | cured | 90 | short | T | • 10-15 | • 10-40 | • 10-25 | •• 10-15 | • 15-40 | • 10-25 | •• 10-25 | •• 10-15 | •• | | | | | | |
| 25 | alloyed >12% Si | high temp. | 130 | short | T | • 10-15 | • 10-30 | • 10-20 | •• 10-15 | • 15-30 | • 10-20 | •• 10-20 | •• 10-15 | •• | | | | | | |
| 26 | >1% Pb | free cutting | 110 | med/short | T | • 25-35 | • 50-70 | • 20-40 | •• 25-35 | • 30-65 | • 20-40 | •• 20-40 | •• 25-35 | •• | 17-40 | | | | | |
| 27 | copper alloys | brass | 90 | long | T | • 15-20 | • 5-60 | • 13-30 | •• 15-20 | • 20-45 | • 13-30 | •• 13-30 | •• 15-20 | •• | 20-60 | | | | | |
| 28 | electrolytic copper | | 100 | long | T | • 15-20 | • 5-25 | • 10-17 | •• 15-20 | • 15-30 | • 10-17 | •• 10-17 | •• 15-20 | •• | 20-60 | | | | | |
| 29 | non metallic | duroplastics, fiber plastics | | short | Z | • 6-10 | • 5-25 | • 6-13 | •• 6-10 | • 10-20 | • 6-13 | •• 6-13 | •• 6-10 | •• | | | | | | |

(1) See page 58
 (2) See page 65
 (3) See page 66
 (4) See page 66

Coolant
 T -oil emulsion
 Z -dry or emulsion

• Recommended
 •• Suitable
 (†) Hand tap

Tap Designation Code Key

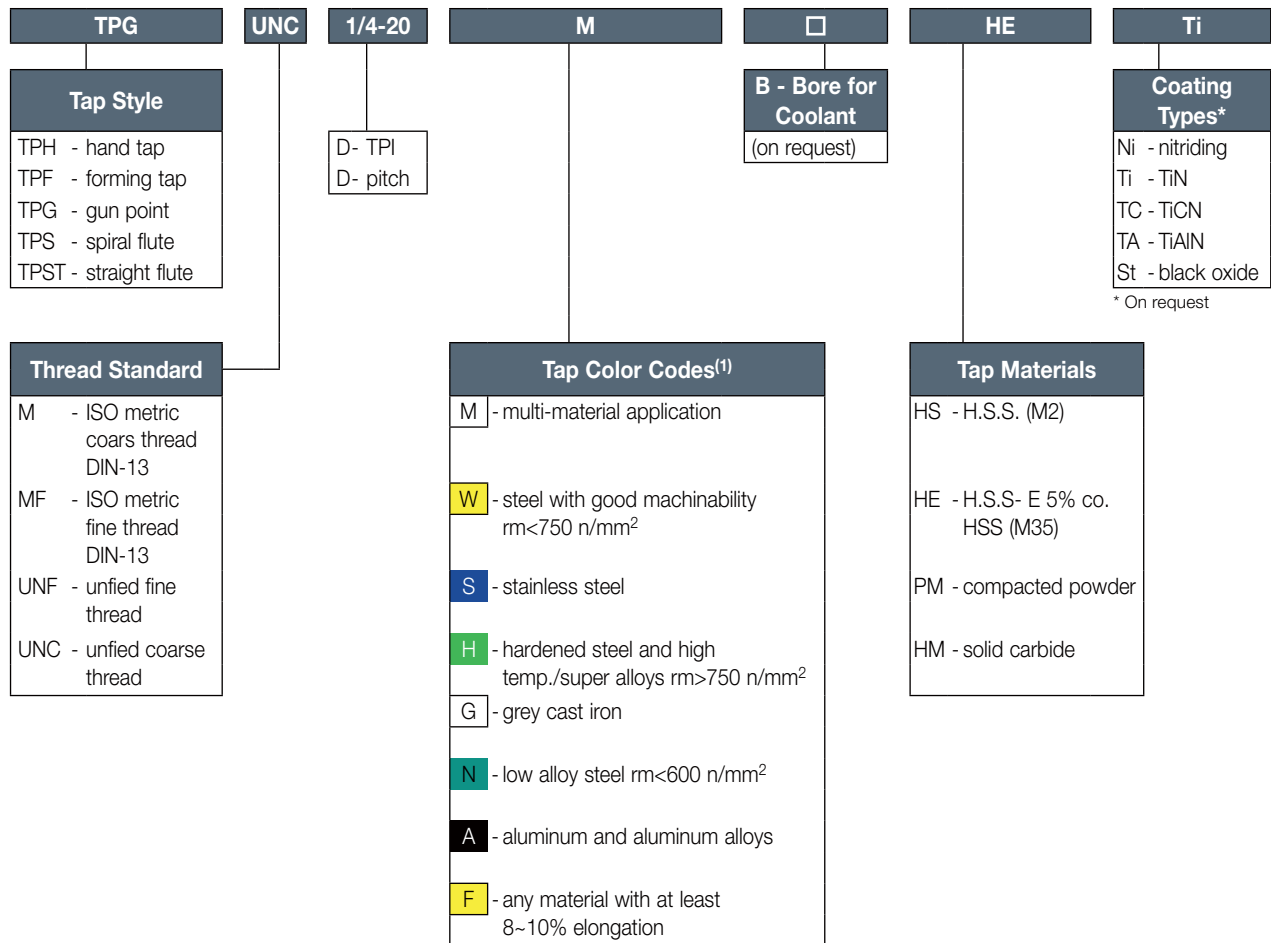

⁽¹⁾ The tools have a matching colored ring around the shank


Chamfer Lead According to DIN2197 (Specified for Each Tool Family)

- A** form A (chamfer lead 5-6 threads)
- B** form B (with gun-nose and chamfer lead 4-5 threads)
- C** form C (chamfer lead 2-3 threads)
- D** form D (chamfer lead 4-5 threads)
- E** form E (chamfer lead 1.5-2 threads)



TPG M (HSS)

DIN 13 HSS Gun Point
Machine Taps - ISO Metric
Coarse Threads for a Wide
Range of Materials

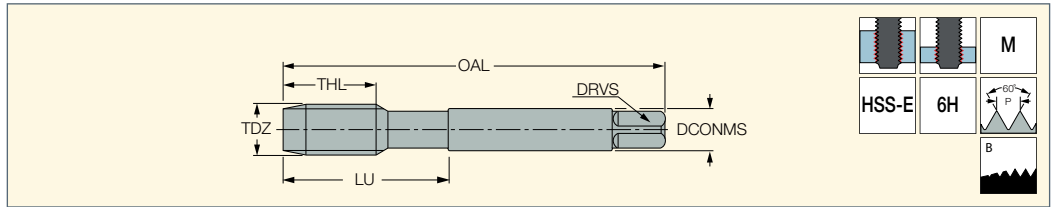

| Designation | Dimensions | | | | | | | | | | HE |
|------------------|------------|-------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TP ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPG M-2X0.4-M | M2 | 0.400 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.60 | DIN 371 | ● |
| TPG M-2.2X0.45-M | M2.2 | 0.450 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.75 | DIN 371 | ● |
| TPG M-2.3X0.4-M | M2.3 | 0.400 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.90 | DIN 371 | ● |
| TPG M-2.5X0.45-M | M2.5 | 0.450 | 50.00 | 9.0 | 15.0 | 2.80 | 3 | 2.10 | 2.05 | DIN 371 | ● |
| TPG M-2.6X0.45-M | M2.6 | 0.450 | 50.00 | 9.0 | 15.0 | 2.80 | 3 | 2.10 | 2.10 | DIN 371 | ● |
| TPG M-3X0.5-M | M3 | 0.500 | 56.00 | 11.0 | 18.0 | 3.50 | 3 | 2.70 | 2.50 | DIN 371 | ● |
| TPG M-3.5X0.6-M | M3.5 | 0.600 | 56.00 | 12.0 | 20.0 | 4.00 | 3 | 3.00 | 2.90 | DIN 371 | ● |
| TPG M-4X0.7-M | M4 | 0.700 | 63.00 | 13.0 | 21.0 | 4.50 | 3 | 3.40 | 3.30 | DIN 371 | ● |
| TPG M-4.5X0.75-M | M4.5 | 0.750 | 70.00 | 14.0 | 25.0 | 6.00 | 3 | 4.90 | 3.70 | DIN 371 | ● |
| TPG M-5X0.8-M | M5 | 0.800 | 70.00 | 15.0 | 25.0 | 6.00 | 3 | 4.90 | 4.20 | DIN 371 | ● |
| TPG M-6X1.0-M | M6 | 1.000 | 80.00 | 17.0 | 30.0 | 6.00 | 3 | 4.90 | 5.00 | DIN 371 | ● |
| TPG M-7X1.0-M | M7 | 1.000 | 80.00 | 17.0 | 30.0 | 7.00 | 3 | 5.50 | 6.00 | DIN 371 | ● |
| TPG M-8X1.25-M | M8 | 1.250 | 90.00 | 20.0 | 35.0 | 8.00 | 3 | 6.20 | 6.80 | DIN 371 | ● |
| TPG M-9X1.25-M | M9 | 1.250 | 90.00 | 20.0 | 35.0 | 9.00 | 3 | 7.00 | 7.80 | DIN 371 | ● |
| TPG M-10X1.5-M | M10 | 1.500 | 100.00 | 22.0 | 39.0 | 10.00 | 3 | 8.00 | 8.50 | DIN 371 | ● |
| TPG M-11X1.5-M | M11 | 1.500 | 100.00 | 22.0 | - | 8.00 | 3 | 6.20 | 9.50 | DIN 376 | ● |
| TPG M-12X1.75-M | M12 | 1.750 | 110.00 | 24.0 | - | 9.00 | 3 | 7.00 | 10.20 | DIN 376 | ● |
| TPG M-14X2.0-M | M14 | 2.000 | 110.00 | 26.0 | - | 11.00 | 3 | 9.00 | 12.00 | DIN 376 | ● |
| TPG M-16X2.0-M | M16 | 2.000 | 110.00 | 27.0 | - | 12.00 | 3 | 9.00 | 14.00 | DIN 376 | ● |
| TPG M-18X2.5-M | M18 | 2.500 | 125.00 | 30.0 | - | 14.00 | 4 | 11.00 | 15.50 | DIN 376 | ● |
| TPG M-20X2.5-M | M20 | 2.500 | 140.00 | 32.0 | - | 16.00 | 4 | 12.00 | 17.50 | DIN 376 | ● |
| TPG M-22X2.5-M | M22 | 2.500 | 140.00 | 32.0 | - | 18.00 | 4 | 14.50 | 19.50 | DIN 376 | ● |
| TPG M-24X3.0-M | M24 | 3.000 | 160.00 | 34.0 | - | 18.00 | 4 | 14.50 | 21.00 | DIN 376 | ● |
| TPG M-27X3.0-M | M27 | 3.000 | 160.00 | 36.0 | - | 20.00 | 4 | 16.00 | 24.00 | DIN 376 | ● |
| TPG M-30X3.5-M | M30 | 3.500 | 180.00 | 40.0 | - | 22.00 | 4 | 18.00 | 26.50 | DIN 376 | ● |


• For user guide and cutting conditions, see pages 57-58,65-79

- ⁽¹⁾ Thread pitch
- ⁽²⁾ Number of flutes
- ⁽³⁾ Torque key size



TPG MF (HSS)

DIN 13 HSS Gun Point Machine
Taps - ISO Metric Fine Threads
for a Wide Range of Materials

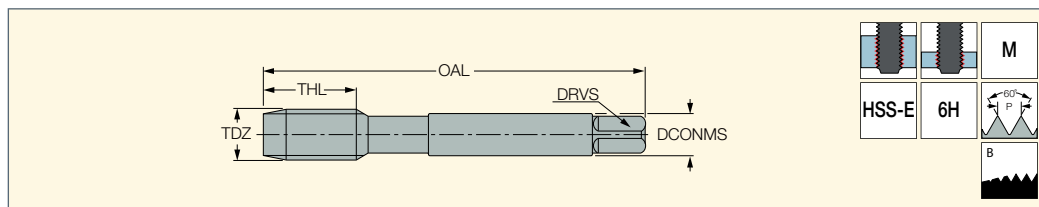

| Designation | Dimensions | | | | | | | | | HE |
|------------------|------------|-------------------|--------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TP ⁽¹⁾ | OAL | THL | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPG MF-4X0.5-M | M4 | 0.500 | 63.00 | 10.0 | 2.80 | 3 | 2.10 | 3.50 | DIN 374 | ● |
| TPG MF-5X0.5-M | M5 | 0.500 | 70.00 | 11.0 | 3.50 | 3 | 2.70 | 4.50 | DIN 374 | ● |
| TPG MF-6X0.75-M | M6 | 0.750 | 80.00 | 13.0 | 4.50 | 3 | 3.40 | 5.20 | DIN 374 | ● |
| TPG MF-6X0.5-M | M6 | 0.500 | 80.00 | 13.0 | 4.50 | 3 | 3.40 | 5.50 | DIN 374 | ● |
| TPG MF-7X0.75-M | M7 | 0.750 | 80.00 | 14.0 | 5.50 | 3 | 4.30 | 6.20 | DIN 374 | ● |
| TPG MF-8X1.0-M | M8 | 1.000 | 90.00 | 17.0 | 6.00 | 3 | 4.90 | 7.00 | DIN 374 | ● |
| TPG MF-8X0.75-M | M8 | 0.750 | 80.00 | 14.0 | 6.00 | 3 | 4.90 | 7.20 | DIN 374 | ● |
| TPG MF-10X1.25-M | M10 | 1.250 | 100.00 | 22.0 | 7.00 | 3 | 5.50 | 8.80 | DIN 374 | ● |
| TPG MF-10X1.0-M | M10 | 1.000 | 90.00 | 18.0 | 7.00 | 3 | 5.50 | 9.00 | DIN 374 | ● |
| TPG MF-10X0.75-M | M10 | 0.750 | 90.00 | 18.0 | 7.00 | 3 | 5.50 | 9.20 | DIN 374 | ● |
| TPG MF-12X1.5-M | M12 | 1.500 | 100.00 | 22.0 | 9.00 | 3 | 7.00 | 10.50 | DIN 374 | ● |
| TPG MF-12X1.25-M | M12 | 1.250 | 100.00 | 22.0 | 9.00 | 3 | 7.00 | 10.80 | DIN 374 | ● |
| TPG MF-12X1.0-M | M12 | 1.000 | 100.00 | 18.0 | 9.00 | 3 | 7.00 | 11.00 | DIN 374 | ● |
| TPG MF-14X1.5-M | M14 | 1.500 | 100.00 | 22.0 | 11.00 | 3 | 9.00 | 12.50 | DIN 374 | ● |
| TPG MF-14X1.25-M | M14 | 1.250 | 100.00 | 22.0 | 11.00 | 3 | 9.00 | 12.80 | DIN 374 | ● |
| TPG MF-14X1.0-M | M14 | 1.000 | 100.00 | 18.0 | 11.00 | 3 | 9.00 | 13.00 | DIN 374 | ● |
| TPG MF-16X1.5-M | M16 | 1.500 | 100.00 | 22.0 | 12.00 | 3 | 9.00 | 14.50 | DIN 374 | ● |
| TPG MF-16X1.0-M | M16 | 1.000 | 100.00 | 18.0 | 12.00 | 3 | 9.00 | 15.00 | DIN 374 | ● |
| TPG MF-18X1.5-M | M18 | 1.500 | 110.00 | 25.0 | 14.00 | 4 | 11.00 | 16.50 | DIN 374 | ● |
| TPG MF-18X1.0-M | M18 | 1.000 | 110.00 | 20.0 | 14.00 | 4 | 11.00 | 17.00 | DIN 374 | ● |
| TPG MF-20X1.5-M | M20 | 1.500 | 125.00 | 25.0 | 16.00 | 4 | 12.00 | 18.50 | DIN 374 | ● |
| TPG MF-20X1.0-M | M20 | 1.000 | 125.00 | 20.0 | 16.00 | 4 | 12.00 | 19.00 | DIN 374 | ● |
| TPG MF-22X1.5-M | M22 | 1.500 | 125.00 | 25.0 | 18.00 | 4 | 14.50 | 20.50 | DIN 374 | ● |
| TPG MF-22X1.0-M | M22 | 1.000 | 125.00 | 20.0 | 18.00 | 4 | 14.50 | 21.00 | DIN 374 | ● |
| TPG MF-24X2.0-M | M24 | 2.000 | 140.00 | 27.0 | 18.00 | 4 | 14.50 | 22.00 | DIN 374 | ● |
| TPG MF-24X1.5-M | M24 | 1.500 | 140.00 | 27.0 | 18.00 | 4 | 14.50 | 22.50 | DIN 374 | ● |
| TPG MF-26X1.5-M | M26 | 1.500 | 140.00 | 28.0 | 18.00 | 4 | 14.50 | 24.50 | DIN 374 | ● |
| TPG MF-27X2.0-M | M27 | 2.000 | 140.00 | 28.0 | 20.00 | 4 | 16.00 | 25.00 | DIN 374 | ● |
| TPG MF-27X1.5-M | M27 | 1.500 | 140.00 | 28.0 | 20.00 | 4 | 16.00 | 25.50 | DIN 374 | ● |
| TPG MF-28X1.5-M | M28 | 1.500 | 140.00 | 28.0 | 20.00 | 4 | 16.00 | 26.50 | DIN 374 | ● |
| TPG MF-30X2.0-M | M30 | 2.000 | 150.00 | 30.0 | 22.00 | 4 | 18.00 | 28.00 | DIN 374 | ● |
| TPG MF-30X1.5-M | M30 | 1.500 | 150.00 | 30.0 | 22.00 | 4 | 18.00 | 28.50 | DIN 374 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79

(1) Thread pitch

(2) Number of flutes

(3) Torque key size




Scan the QR code for additional information.

Enter the item description in the search field to access additional related data.

TPG UNC (HSS)

HSS Gun Point Machine Taps
- Unified Coarse Threads for a Wide Range of Materials

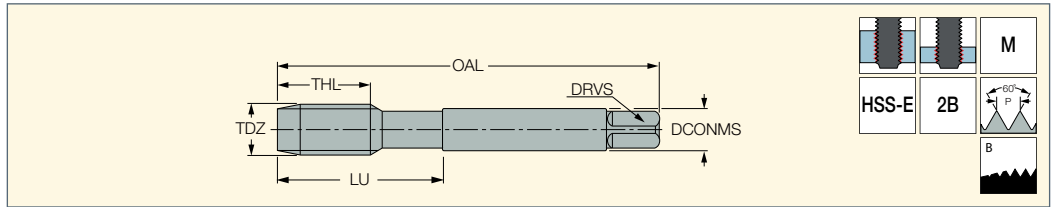

| Designation | Dimensions | | | | | | | | | | HE |
|-------------------|------------|--------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TPI ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPG UNC-#4-40-M | #4 | 40.0 | 56.00 | 11.0 | 18.0 | 3.50 | 3 | 2.70 | 2.30 | DIN 371 | ● |
| TPG UNC-#5-40-M | #5 | 40.0 | 56.00 | 11.0 | 18.0 | 3.50 | 3 | 2.70 | 2.60 | DIN 371 | ● |
| TPG UNC-#6-32-M | #6 | 32.0 | 56.00 | 12.0 | 20.0 | 4.00 | 3 | 3.00 | 2.85 | DIN 371 | ● |
| TPG UNC-#8-32-M | #8 | 32.0 | 63.00 | 13.0 | 21.0 | 4.50 | 3 | 3.40 | 3.50 | DIN 371 | ● |
| TPG UNC-#10-24-M | #10 | 24.0 | 70.00 | 15.0 | 25.0 | 6.00 | 3 | 4.90 | 3.90 | DIN 371 | ● |
| TPG UNC-#12-24-M | #12 | 24.0 | 80.00 | 16.0 | 30.0 | 6.00 | 3 | 4.90 | 4.50 | DIN 371 | ● |
| TPG UNC-1/4-20-M | 1/4" | 20.0 | 80.00 | 17.0 | 30.0 | 7.00 | 3 | 5.50 | 5.20 | DIN 371 | ● |
| TPG UNC-5/16-18-M | 5/16" | 18.0 | 90.00 | 20.0 | 35.0 | 8.00 | 3 | 6.20 | 6.60 | DIN 371 | ● |
| TPG UNC-3/8-16-M | 3/8" | 16.0 | 100.00 | 22.0 | 39.0 | 9.00 | 3 | 7.00 | 8.00 | DIN 371 | ● |
| TPG UNC-7/16-14-M | 7/16" | 14.0 | 100.00 | 22.0 | - | 8.00 | 3 | 6.20 | 9.40 | DIN 376 | ● |
| TPG UNC-1/2-13-M | 1/2" | 13.0 | 110.00 | 25.0 | - | 9.00 | 3 | 7.00 | 10.75 | DIN 376 | ● |
| TPG UNC-9/16-12-M | 9/16" | 12.0 | 110.00 | 26.0 | - | 11.00 | 3 | 9.00 | 12.25 | DIN 376 | ● |
| TPG UNC-5/8-11-M | 5/8" | 11.0 | 110.00 | 27.0 | - | 12.00 | 3 | 9.00 | 13.50 | DIN 376 | ● |
| TPG UNC-3/4-10-M | 3/4" | 10.0 | 125.00 | 30.0 | - | 14.00 | 4 | 11.00 | 16.50 | DIN 376 | ● |
| TPG UNC-7/8-9-M | 7/8" | 9.0 | 140.00 | 32.0 | - | 18.00 | 4 | 14.50 | 19.50 | DIN 376 | ● |
| TPG UNC-1-8-M | 1" | 8.0 | 160.00 | 36.0 | - | 20.00 | 4 | 16.00 | 22.25 | DIN 376 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79


⁽¹⁾ Threads per inch

⁽²⁾ Number of flutes

⁽³⁾ Torque key size

TPG UNF (HSS)

HSS Gun Point Machine Taps
Unified Fine Threads for a Wide Range of Materials

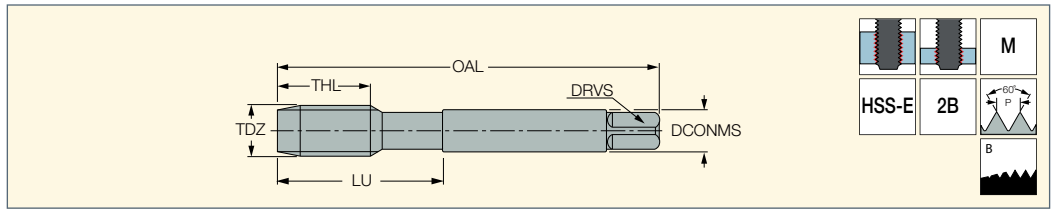

| Designation | Dimensions | | | | | | | | | | HE |
|-------------------|------------|--------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TPI ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPG UNF-#4-48-M | #4 | 48.0 | 56.00 | 11.0 | 18.0 | 3.50 | 3 | 2.70 | 2.40 | DIN 371 | ● |
| TPG UNF-#5-44-M | #5 | 44.0 | 56.00 | 11.0 | 18.0 | 3.50 | 3 | 2.70 | 2.70 | DIN 371 | ● |
| TPG UNF-#6-40-M | #6 | 40.0 | 56.00 | 12.0 | 20.0 | 4.00 | 3 | 3.00 | 3.00 | DIN 371 | ● |
| TPG UNF-#8-36-M | #8 | 36.0 | 63.00 | 13.0 | 21.0 | 4.50 | 3 | 3.40 | 3.50 | DIN 371 | ● |
| TPG UNF-#10-32-M | #10 | 32.0 | 70.00 | 15.0 | 25.0 | 6.00 | 3 | 4.90 | 4.10 | DIN 371 | ● |
| TPG UNF-#12-28-M | #12 | 28.0 | 80.00 | 16.0 | 30.0 | 6.00 | 3 | 4.90 | 4.70 | DIN 371 | ● |
| TPG UNF-1/4-28-M | 1/4" | 28.0 | 80.00 | 17.0 | 30.0 | 7.00 | 3 | 5.50 | 5.50 | DIN 371 | ● |
| TPG UNF-5/16-24-M | 5/16" | 24.0 | 90.00 | 17.0 | 35.0 | 8.00 | 3 | 6.20 | 6.90 | DIN 371 | ● |
| TPG UNF-3/8-24-M | 3/8" | 24.0 | 100.00 | 18.0 | 39.0 | 9.00 | 3 | 7.00 | 8.50 | DIN 371 | ● |
| TPG UNF-7/16-20-M | 7/16" | 20.0 | 100.00 | 22.0 | - | 8.00 | 3 | 6.20 | 9.90 | DIN 374 | ● |
| TPG UNF-1/2-20-M | 1/2" | 20.0 | 100.00 | 22.0 | - | 9.00 | 3 | 7.00 | 11.50 | DIN 374 | ● |
| TPG UNF-9/16-18-M | 9/16" | 18.0 | 100.00 | 22.0 | - | 11.00 | 3 | 9.00 | 12.90 | DIN 374 | ● |
| TPG UNF-5/8-18-M | 5/8" | 18.0 | 100.00 | 22.0 | - | 12.00 | 3 | 9.00 | 14.50 | DIN 374 | ● |
| TPG UNF-3/4-16-M | 3/4" | 16.0 | 110.00 | 25.0 | - | 14.00 | 4 | 11.00 | 17.50 | DIN 374 | ● |
| TPG UNF-7/8-14-M | 7/8" | 14.0 | 125.00 | 26.0 | - | 18.00 | 4 | 14.50 | 20.50 | DIN 374 | ● |
| TPG UNF-1-12-M | 1" | 12.0 | 140.00 | 28.0 | - | 20.00 | 4 | 16.00 | 23.25 | DIN 374 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79

⁽¹⁾ Threads per inch



⁽²⁾ Number of flutes

⁽³⁾ Torque key size



ONETAP**TPS M (HSS)**

DIN 13 HSS Spiral Flute Machine
Taps - Metric Coarse Threads
for a Wide Range of Materials

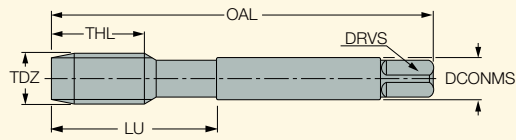

| Designation | Dimensions | | | | | | | | | | | H |
|------------------|------------|-------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|--------------------|---|
| | TDZ | TP ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | CSP ⁽⁴⁾ | |
| TPS M-2X0.4-M | M2 | 0.400 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.60 | DIN 371 | 0 | ● |
| TPS M-2.2X0.45-M | M2.2 | 0.450 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.75 | DIN 371 | 0 | ● |
| TPS M-2.3X0.4-M | M2.3 | 0.400 | 45.00 | 8.0 | 13.0 | 2.80 | 3 | 2.10 | 1.90 | DIN 371 | 0 | ● |
| TPS M-2.5X0.45-M | M2.5 | 0.450 | 50.00 | 9.0 | 15.0 | 2.80 | 3 | 2.10 | 2.05 | DIN 371 | 0 | ● |
| TPS M-2.6X0.45-M | M2.6 | 0.450 | 50.00 | 9.0 | 15.0 | 2.80 | 3 | 2.10 | 2.10 | DIN 371 | 0 | ● |
| TPS M-3X0.5-M | M3 | 0.500 | 56.00 | 6.0 | 18.0 | 3.50 | 3 | 2.70 | 2.50 | DIN 371 | 0 | ● |
| TPS M-3.5X0.6-M | M3.5 | 0.600 | 56.00 | 7.0 | 20.0 | 4.00 | 3 | 3.00 | 2.90 | DIN 371 | 0 | ● |
| TPS M-4X0.7-M | M4 | 0.700 | 63.00 | 7.0 | 21.0 | 4.50 | 3 | 3.40 | 3.30 | DIN 371 | 0 | ● |
| TPS M-4.5X0.75-M | M4.5 | 0.750 | 70.00 | 8.0 | 25.0 | 6.00 | 3 | 4.90 | 3.70 | DIN 371 | 0 | ● |
| TPS M-5X0.8-M | M5 | 0.800 | 70.00 | 8.0 | 25.0 | 6.00 | 3 | 4.90 | 4.20 | DIN 371 | 0 | ● |
| TPS M-6X1.0-M | M6 | 1.000 | 80.00 | 10.0 | 30.0 | 6.00 | 3 | 4.90 | 5.00 | DIN 371 | 0 | ● |
| TPS M-7X1.0-M | M7 | 1.000 | 80.00 | 10.0 | 30.0 | 7.00 | 3 | 5.50 | 6.00 | DIN 371 | 0 | ● |
| TPS M-8X1.25-M | M8 | 1.250 | 90.00 | 13.0 | 35.0 | 8.00 | 3 | 6.20 | 6.80 | DIN 371 | 0 | ● |
| TPS M-9X1.25-M | M9 | 1.250 | 90.00 | 13.0 | 35.0 | 9.00 | 3 | 7.00 | 7.80 | DIN 371 | 0 | ● |
| TPS M-10X1.5-M | M10 | 1.500 | 100.00 | 15.0 | 39.0 | 10.00 | 3 | 8.00 | 8.50 | DIN 371 | 0 | ● |
| TPS M-11X1.5-M | M11 | 1.500 | 100.00 | 17.0 | - | 8.00 | 3 | 6.20 | 9.50 | DIN 376 | 0 | ● |
| TPS M-12X1.75-M | M12 | 1.750 | 110.00 | 18.0 | - | 9.00 | 3 | 7.00 | 10.20 | DIN 376 | 0 | ● |
| TPS M-14X2.0-M | M14 | 2.000 | 110.00 | 20.0 | - | 11.00 | 3 | 9.00 | 12.00 | DIN 376 | 0 | ● |
| TPS M-16X2.0-M | M16 | 2.000 | 110.00 | 20.0 | - | 12.00 | 3 | 9.00 | 14.00 | DIN 376 | 0 | ● |
| TPS M-16X2.0-M-B | M16 | 2.000 | 110.00 | 20.0 | - | 12.00 | 3 | 9.00 | 14.00 | DIN 376 | 1 | ● |
| TPS M-18X2.5-M | M18 | 2.500 | 125.00 | 25.0 | - | 14.00 | 4 | 11.00 | 15.50 | DIN 376 | 0 | ● |
| TPS M-18X2.5-M-B | M18 | 2.500 | 125.00 | 25.0 | - | 14.00 | 4 | 11.00 | 15.50 | DIN 376 | 1 | ● |
| TPS M-20X2.5-M | M20 | 2.500 | 140.00 | 25.0 | - | 16.00 | 4 | 12.00 | 17.50 | DIN 376 | 0 | ● |
| TPS M-20X2.5-M-B | M20 | 2.500 | 140.00 | 25.0 | - | 16.00 | 4 | 12.00 | 17.50 | DIN 376 | 1 | ● |
| TPS M-22X2.5-M | M22 | 2.500 | 140.00 | 25.0 | - | 18.00 | 4 | 14.50 | 19.50 | DIN 376 | 0 | ● |
| TPS M-22X2.5-M-B | M22 | 2.500 | 140.00 | 25.0 | - | 18.00 | 4 | 14.50 | 19.50 | DIN 376 | 1 | ● |
| TPS M-24X3.0-M | M24 | 3.000 | 160.00 | 30.0 | - | 18.00 | 4 | 14.50 | 21.00 | DIN 376 | 0 | ● |
| TPS M-24X3.0-M-B | M24 | 3.000 | 160.00 | 30.0 | - | 18.00 | 4 | 14.50 | 21.00 | DIN 376 | 1 | ● |
| TPS M-27X3.0-M | M27 | 3.000 | 160.00 | 30.0 | - | 20.00 | 4 | 16.00 | 24.00 | DIN 376 | 0 | ● |
| TPS M-30X3.5-M | M30 | 3.500 | 180.00 | 35.0 | - | 22.00 | 4 | 18.00 | 26.50 | DIN 376 | 0 | ● |
| TPS M-30X3.5-M-B | M30 | 3.500 | 180.00 | 35.0 | - | 22.00 | 4 | 18.00 | 26.50 | DIN 376 | 1 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79

⁽¹⁾ Thread pitch

⁽²⁾ Number of flutes


⁽³⁾ Torque key size

⁽⁴⁾ 0 - Without coolant supply, 1 - With coolant supply



TPS MF (HSS)

DIN 13 HSS Spiral Flute Machine
Taps - Metric Fine Threads for
a Wide Range of Materials

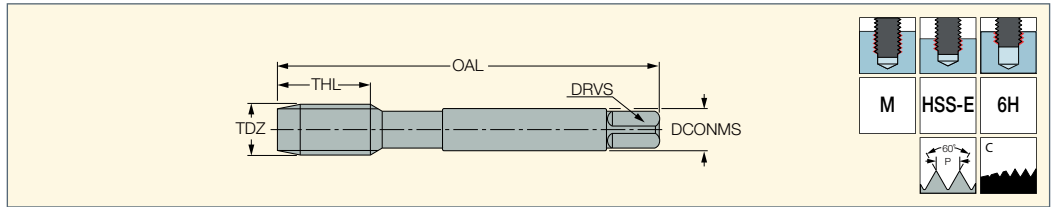

| Designation | Dimensions | | | | | | | | | HE |
|------------------|------------|-------------------|--------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TP ⁽¹⁾ | OAL | THL | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPS MF-4X0.5-M | M4 | 0.500 | 63.00 | 5.0 | 2.80 | 3 | 2.10 | 3.50 | DIN 374 | ● |
| TPS MF-5X0.5-M | M5 | 0.500 | 70.00 | 5.0 | 3.50 | 3 | 2.70 | 4.50 | DIN 374 | ● |
| TPS MF-6X0.75-M | M6 | 0.750 | 80.00 | 8.0 | 4.50 | 3 | 3.40 | 5.20 | DIN 374 | ● |
| TPS MF-6X0.5-M | M6 | 0.500 | 80.00 | 5.0 | 4.50 | 3 | 3.40 | 5.50 | DIN 374 | ● |
| TPS MF-7X0.75-M | M7 | 0.750 | 80.00 | 10.0 | 5.50 | 3 | 4.30 | 6.20 | DIN 374 | ● |
| TPS MF-8X1.0-M | M8 | 1.000 | 90.00 | 10.0 | 6.00 | 3 | 4.90 | 7.00 | DIN 374 | ● |
| TPS MF-8X0.75-M | M8 | 0.750 | 80.00 | 8.0 | 6.00 | 3 | 4.90 | 7.20 | DIN 374 | ● |
| TPS MF-10X1.25-M | M10 | 1.250 | 100.00 | 16.0 | 7.00 | 3 | 5.50 | 8.80 | DIN 374 | ● |
| TPS MF-10X1.0-M | M10 | 1.000 | 90.00 | 10.0 | 7.00 | 3 | 5.50 | 9.00 | DIN 374 | ● |
| TPS MF-10X0.75-M | M10 | 0.750 | 90.00 | 10.0 | 7.00 | 3 | 5.50 | 9.20 | DIN 374 | ● |
| TPS MF-12X1.5-M | M12 | 1.500 | 100.00 | 15.0 | 9.00 | 3 | 7.00 | 10.50 | DIN 374 | ● |
| TPS MF-12X1.25-M | M12 | 1.250 | 100.00 | 15.0 | 9.00 | 3 | 7.00 | 10.80 | DIN 374 | ● |
| TPS MF-12X1.0-M | M12 | 1.000 | 100.00 | 11.0 | 9.00 | 3 | 7.00 | 11.00 | DIN 374 | ● |
| TPS MF-14X1.5-M | M14 | 1.500 | 100.00 | 15.0 | 11.00 | 3 | 9.00 | 12.50 | DIN 374 | ● |
| TPS MF-14X1.25-M | M14 | 1.250 | 100.00 | 15.0 | 11.00 | 3 | 9.00 | 12.80 | DIN 374 | ● |
| TPS MF-14X1.0-M | M14 | 1.000 | 100.00 | 11.0 | 11.00 | 3 | 9.00 | 13.00 | DIN 374 | ● |
| TPS MF-16X1.5-M | M16 | 1.500 | 100.00 | 15.0 | 12.00 | 3 | 9.00 | 14.50 | DIN 374 | ● |
| TPS MF-16X1.0-M | M16 | 1.000 | 100.00 | 12.0 | 12.00 | 3 | 9.00 | 15.00 | DIN 374 | ● |
| TPS MF-18X1.5-M | M18 | 1.500 | 110.00 | 17.0 | 14.00 | 4 | 11.00 | 16.50 | DIN 374 | ● |
| TPS MF-18X1.0-M | M18 | 1.000 | 110.00 | 13.0 | 14.00 | 4 | 11.00 | 17.00 | DIN 374 | ● |
| TPS MF-20X1.5-M | M20 | 1.500 | 125.00 | 17.0 | 16.00 | 4 | 12.00 | 18.50 | DIN 374 | ● |
| TPS MF-20X1.0-M | M20 | 1.000 | 125.00 | 14.0 | 16.00 | 4 | 12.00 | 19.00 | DIN 374 | ● |
| TPS MF-22X1.5-M | M22 | 1.500 | 125.00 | 17.0 | 18.00 | 4 | 14.50 | 20.50 | DIN 374 | ● |
| TPS MF-22X1.0-M | M22 | 1.000 | 125.00 | 14.0 | 18.00 | 4 | 14.50 | 21.00 | DIN 374 | ● |
| TPS MF-24X2.0-M | M24 | 2.000 | 140.00 | 20.0 | 18.00 | 4 | 14.50 | 22.00 | DIN 374 | ● |
| TPS MF-24X1.5-M | M24 | 1.500 | 140.00 | 20.0 | 18.00 | 4 | 14.50 | 22.50 | DIN 374 | ● |
| TPS MF-26X1.5-M | M26 | 1.500 | 140.00 | 20.0 | 18.00 | 4 | 14.50 | 24.50 | DIN 374 | ● |
| TPS MF-27X2.0-M | M27 | 2.000 | 140.00 | 20.0 | 20.00 | 4 | 16.00 | 25.00 | DIN 374 | ● |
| TPS MF-27X1.5-M | M27 | 1.500 | 140.00 | 20.0 | 20.00 | 4 | 16.00 | 25.50 | DIN 374 | ● |
| TPS MF-28X1.5-M | M28 | 1.500 | 140.00 | 20.0 | 20.00 | 4 | 16.00 | 26.50 | DIN 374 | ● |
| TPS MF-30X2.0-M | M30 | 2.000 | 150.00 | 22.0 | 22.00 | 4 | 18.00 | 28.00 | DIN 374 | ● |
| TPS MF-30X1.5-M | M30 | 1.500 | 150.00 | 22.0 | 22.00 | 4 | 18.00 | 28.50 | DIN 374 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79


- ⁽¹⁾ Thread pitch
- ⁽²⁾ Number of flutes
- ⁽³⁾ Torque key size



ONETAP

TPS UNC (HSS)

HSS Spiral Flute Machine Taps
Unified Coarse Threads for
a Wide Range of Materials

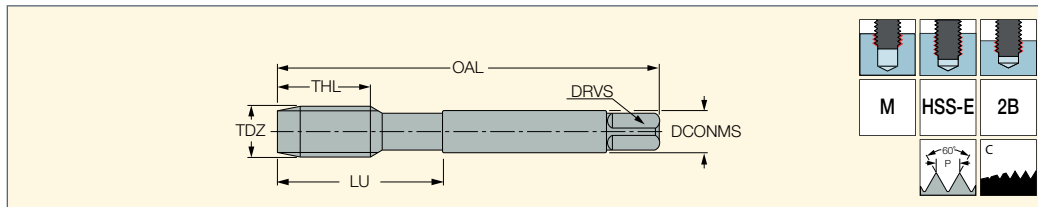

| Designation | Dimensions | | | | | | | | | | HE |
|-------------------|------------|--------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TPI ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPS UNC-#4-40-M | #4 | 40.0 | 56.00 | 6.0 | 18.0 | 3.50 | 3 | 2.70 | 2.30 | DIN 371 | ● |
| TPS UNC-#5-40-M | #5 | 40.0 | 56.00 | 7.0 | 18.0 | 3.50 | 3 | 2.70 | 2.60 | DIN 371 | ● |
| TPS UNC-#6-32-M | #6 | 32.0 | 56.00 | 7.0 | 20.0 | 4.00 | 3 | 3.00 | 2.85 | DIN 371 | ● |
| TPS UNC-#8-32-M | #8 | 32.0 | 63.00 | 8.0 | 21.0 | 4.50 | 3 | 3.40 | 3.50 | DIN 371 | ● |
| TPS UNC-#10-24-M | #10 | 24.0 | 70.00 | 10.0 | 25.0 | 6.00 | 3 | 4.90 | 3.90 | DIN 371 | ● |
| TPS UNC-#12-24-M | #12 | 24.0 | 80.00 | 10.0 | 30.0 | 6.00 | 3 | 4.90 | 4.50 | DIN 371 | ● |
| TPS UNC-1/4-20-M | 1/4" | 20.0 | 80.00 | 13.0 | 30.0 | 7.00 | 3 | 5.50 | 5.20 | DIN 371 | ● |
| TPS UNC-5/16-18-M | 5/16" | 18.0 | 90.00 | 14.0 | 35.0 | 8.00 | 3 | 6.20 | 6.60 | DIN 371 | ● |
| TPS UNC-3/8-16-M | 3/8" | 16.0 | 100.00 | 16.0 | 39.0 | 9.00 | 3 | 7.00 | 8.00 | DIN 371 | ● |
| TPS UNC-7/16-14-M | 7/16" | 14.0 | 100.00 | 17.0 | - | 8.00 | 3 | 6.20 | 9.40 | DIN 376 | ● |
| TPS UNC-1/2-13-M | 1/2" | 13.0 | 110.00 | 20.0 | - | 9.00 | 3 | 7.00 | 10.75 | DIN 376 | ● |
| TPS UNC-9/16-12-M | 9/16" | 12.0 | 110.00 | 20.0 | - | 11.00 | 3 | 9.00 | 12.25 | DIN 376 | ● |
| TPS UNC-5/8-11-M | 5/8" | 11.0 | 110.00 | 22.0 | - | 12.00 | 3 | 9.00 | 13.50 | DIN 376 | ● |
| TPS UNC-3/4-10-M | 3/4" | 10.0 | 125.00 | 25.0 | - | 14.00 | 4 | 11.00 | 16.50 | DIN 376 | ● |
| TPS UNC-7/8-9-M | 7/8" | 9.0 | 140.00 | 27.0 | - | 18.00 | 4 | 14.50 | 19.50 | DIN 376 | ● |
| TPS UNC-1-8-M | 1" | 8.0 | 160.00 | 30.0 | - | 20.00 | 4 | 16.00 | 22.25 | DIN 376 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79

⁽¹⁾ Threads per inch


⁽²⁾ Number of flutes

⁽³⁾ Torque key size

ONETAP

TPS UNF (HSS)

HSS Spiral Flute Machine
Taps - Unified Fine Threads for
a Wide Range of Materials

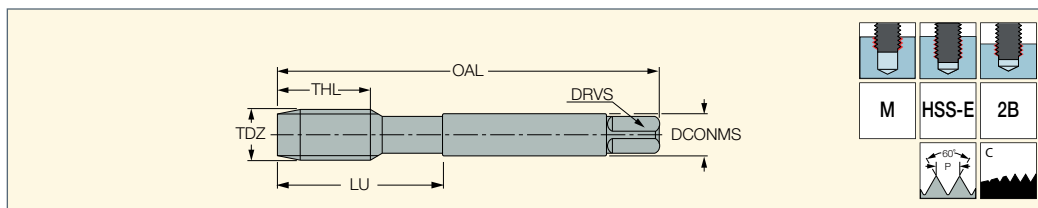

| Designation | Dimensions | | | | | | | | | | HE |
|-------------------|------------|--------------------|--------|------|------|--------|--------------------|---------------------|----------|----------|----|
| | TDZ | TPI ⁽¹⁾ | OAL | THL | LU | DCONMS | NOF ⁽²⁾ | DRVS ⁽³⁾ | Pre-hole | Standard | |
| TPS UNF-#4-48-M | #4 | 48.0 | 56.00 | 6.0 | 18.0 | 3.50 | 3 | 2.70 | 2.40 | DIN 371 | ● |
| TPS UNF-#5-44-M | #5 | 44.0 | 56.00 | 7.0 | 18.0 | 3.50 | 3 | 2.70 | 2.70 | DIN 371 | ● |
| TPS UNF-#6-40-M | #6 | 40.0 | 56.00 | 7.0 | 20.0 | 4.00 | 3 | 3.00 | 3.00 | DIN 371 | ● |
| TPS UNF-#8-36-M | #8 | 36.0 | 63.00 | 8.0 | 21.0 | 4.50 | 3 | 3.40 | 3.50 | DIN 371 | ● |
| TPS UNF-#10-32-M | #10 | 32.0 | 70.00 | 10.0 | 25.0 | 6.00 | 3 | 4.90 | 4.10 | DIN 371 | ● |
| TPS UNF-#12-28-M | #12 | 28.0 | 80.00 | 10.0 | 30.0 | 6.00 | 3 | 4.90 | 4.70 | DIN 371 | ● |
| TPS UNF-1/4-28-M | 1/4" | 28.0 | 80.00 | 10.0 | 30.0 | 7.00 | 3 | 5.50 | 5.50 | DIN 371 | ● |
| TPS UNF-5/16-24-M | 5/16" | 24.0 | 90.00 | 10.0 | 35.0 | 8.00 | 3 | 6.20 | 6.90 | DIN 371 | ● |
| TPS UNF-3/8-24-M | 3/8" | 24.0 | 100.00 | 10.0 | 39.0 | 9.00 | 3 | 7.00 | 8.50 | DIN 371 | ● |
| TPS UNF-7/16-20-M | 7/16" | 20.0 | 100.00 | 13.0 | - | 8.00 | 3 | 6.20 | 9.90 | DIN 374 | ● |
| TPS UNF-1/2-20-M | 1/2" | 20.0 | 100.00 | 13.0 | - | 9.00 | 3 | 7.00 | 11.50 | DIN 374 | ● |
| TPS UNF-9/16-18-M | 9/16" | 18.0 | 100.00 | 15.0 | - | 11.00 | 3 | 9.00 | 12.90 | DIN 374 | ● |
| TPS UNF-5/8-18-M | 5/8" | 18.0 | 100.00 | 15.0 | - | 12.00 | 3 | 9.00 | 14.50 | DIN 374 | ● |
| TPS UNF-3/4-16-M | 3/4" | 16.0 | 110.00 | 17.0 | - | 14.00 | 4 | 11.00 | 17.50 | DIN 374 | ● |
| TPS UNF-7/8-14-M | 7/8" | 14.0 | 125.00 | 17.0 | - | 18.00 | 4 | 14.50 | 20.50 | DIN 374 | ● |
| TPS UNF-1-12-M | 1" | 12.0 | 140.00 | 20.0 | - | 20.00 | 4 | 16.00 | 23.25 | DIN 374 | ● |

• For user guide and cutting conditions, see pages 57-58,65-79

⁽¹⁾ Threads per inch

⁽²⁾ Number of flutes

⁽³⁾ Torque key size



Tap Surface Treatments and Coating Types

The high speed steels we use grant high wear resistance and toughness. For machining certain materials, various surface treatments are an advantage.

Steam Tempered (ST)

The steam tempered is a Fe₃O₄ oxide coating which reduces the friction between the tool and workpiece and prevents cold welding.

Nitriding (NI)

Recommended surface treatment for machining hard wear/abrasive materials such as grey cast iron, aluminum alloys with high silicon percentage (more than 10%).

TiN Coating (TI)

The TiN coating has a hardness of approximately 2,300 HV and is temperature resistant up to approximately 600°C. This is an excellent golden colored coating for general applications.

TiCN-COATING – TiCN

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness. The TiCN brings an advantage to machining very difficult steels or cutting interrupted bores. The TiCN-coating has a hardness of approx. 3,000 HV, but is temperature resistant up to approx. 400°C only. That means TiCN needs excellent cooling for long service life. Color: Blue-grey coefficient of friction against steel : 0.4

TiAlN-COATING – TiAlN

This is a special coating for machining abrasive materials such as: grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining under high temperatures, which means with insufficient cooling, or high speeds ≥ 600m/min. TiAlN has a hardness of approx. 3,000 HV and is temperature resistant up to approx. 800°C. Color: Violet-grey coefficient of friction against steel : 0.4

Hardslick-COATING – Hardslick

Hardslick combines in a novel way the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C (Tungsten carbide/carbon) coating. The hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C. Color: Violet-grey coefficient of friction against steel : 0.2

Tolerances According to DIN EN 22857

For taps with ISO metric threads.

The following chart gives a comparison between the new standard DIN EN 22857 and the withdrawn standard DIN 802 part 1. An important change is the re-classification from tap tolerance to tap application class.


| Application Class for Taps to DIN EN 22857 | Tolerance Class to Withdrawn Standard DIN 802 Part 1 | Allotment of the Tolerance Zones of the Nut Thread to Be Cut |
|--|--|--|
| class 1 ISO 1 | 4H | 4H 5H - - - |
| class 2 ISO 2 | 6H | 5G 5G 6H - - |
| class 3 ISO 3 | 6G | - - 6G 7H 8H |
| - - | 7G | - - - 7G 8G |

A suitable transition period is to be expected.

Codes for tolerance classes 7G/8G and <X> tolerance zones have yet to be standardized within DIN EN 22857, and the values from DIN 802 part will remain valid.


Tap Nomenclature and Standards

DIN 371

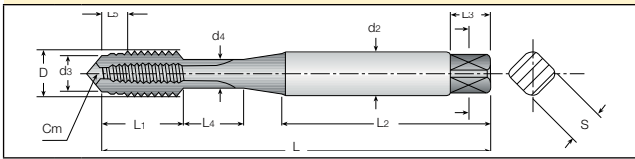

- D - major diameter
- d2 - shank diameter
- d3 - chamfer diameter
- d4 - neck diameter

DIN 376

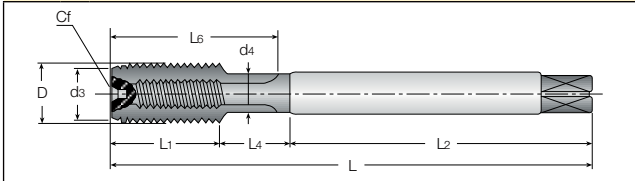


- L - total length
- L1 - thread length
- L2 - shank length
- L3 - square length
- L4 - neck length
- L5 - chamfer length
- L6 - flute length
- S - square size
- Cm - center male
- Cf - center female

Chamfer Lead Forms According to DIN 2197

| | | |
|----------|---------------|--|
| A | 6-8 threads | Form A Long, 6-8 threads for short through holes. |
| B | 3.5-5 threads | Form B Medium, 3.5-5 threads, with spiral point for all through holes and deep tapping holes. |
| C | 2-3 threads | Form C Long, 2-3 threads for blind holes and generally for aluminum grey cast iron and brass. |
| D | 3.5-5 threads | Form D Medium, 3.5-5 threads for through and blind holes with sufficient runout. |
| E | 1.5-2 threads | Form E Extremely short, 1.5-2 threads for blind holes with little runout depth. Avoid use if possible. |
| F | 1-1.5 threads | Form F Extremely short, 1-1.5 threads for blind holes with little runout depth. Avoid use if possible. |

Chamfer Lead Length for Sets of 3 Hand Taps

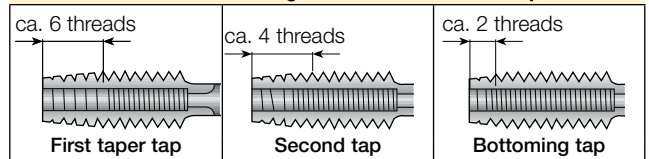

Tap Styles for Hole Types

| | |
|-------------|---|
| throughhole | |
| | 1 straight fluted tap with spiral point |
| | 2 left-hand spiral fluted tap |
| | 3 straight fluted tap with long chamfer lead |
| blind hole | |
| | 1 right-hand spiral fluted tap |
| | 2 straight fluted tap with short chamfer lead |

Front and End Configurations According to DIN2197

| Front End | | Shank End | |
|-----------|-------------------------|-----------|-----------------|
| 1 | External Center | 4 | External Center |
| 2 | Stepped External Center | 5 | Chamfer |
| 3 | Internal Center | 6 | Internal Center |

| Thread Dia. Range (mm) | Front End | | | Shank End | | Tap Standard |
|------------------------|-----------|---|---|-----------|-----|--------------|
| ≤Ø6 | 1 | | | 4 | 5 | DIN352 |
| Ø7 | 1 | 2 | | 4 | 5 6 | DIN371 |
| ≥Ø8 | 1 | 2 | 3 | 5 | 6 | DIN376 |

Pre-Tapping Hole Sizes

| ISO Metric Threads Coarse Pitch | | | |
|---------------------------------|----------|-----------------|---------------|
| M | Pitch mm | Max Core Dia.mm | Drill Size mm |
| 1 | 0.25 | 0.785 | 0.75 |
| 1.1 | 0.25 | 0.885 | 0.85 |
| 1.2 | 0.25 | 0.985 | 0.95 |
| 1.4 | 0.30 | 1.160 | 1.10 |
| 1.6 | 0.35 | 1.321 | 1.25 |
| 1.7 | 0.35 | 1.346 | 1.30 |
| 1.8 | 0.35 | 1.521 | 1.45 |
| 2 | 0.40 | 1.679 | 1.60 |
| 2.2 | 0.45 | 1.838 | 1.75 |
| 2.3 | 0.40 | 1.920 | 1.90 |
| 2.5 | 0.45 | 2.138 | 2.05 |
| 2.6 | 0.45 | 2.176 | 2.10 |
| 3 | 0.50 | 2.599 | 2.50 |
| 3.5 | 0.60 | 3.010 | 2.90 |
| 4 | 0.70 | 3.422 | 3.30 |
| 4,5 | 0.75 | 3.878 | 3.70 |
| 5 | 0.80 | 4.334 | 4.20 |
| 6 | 1.00 | 5.153 | 5.00 |
| 7 | 1.00 | 6.153 | 6.00 |
| 8 | 1.25 | 6.912 | 6.80 |
| 9 | 1,25 | 7.912 | 7.80 |
| 10 | 1.50 | 8.676 | 8.50 |
| 11 | 1.50 | 9.676 | 9.50 |
| 12 | 1.75 | 10.441 | 10.20 |
| 14 | 2.00 | 12.210 | 12.00 |
| 16 | 2.00 | 14.210 | 14.00 |
| 18 | 2.50 | 15.744 | 15.50 |
| 20 | 2.50 | 17.744 | 17.50 |
| 22 | 2.50 | 19.744 | 19.50 |
| 24 | 3.00 | 21.252 | 21.00 |
| 27 | 3.00 | 24.252 | 24.00 |
| 30 | 3.50 | 26.771 | 26.50 |
| 33 | 3.50 | 29.771 | 29.50 |
| 36 | 4.00 | 32.270 | 32.00 |
| 39 | 4.00 | 35.270 | 35.00 |
| 42 | 4.50 | 37.799 | 37.50 |
| 45 | 4.50 | 40.799 | 40.50 |
| 48 | 5.00 | 43.297 | 43.00 |
| 52 | 5.00 | 47.297 | 47.00 |
| 56 | 5.50 | 50.796 | 50.50 |
| 60 | 5.50 | 54.796 | 54.50 |
| 64 | 6.00 | 58.305 | 58.00 |
| 68 | 6.00 | 62.305 | 62.00 |

| ISO Metric Threads Fine Pitch | | | |
|-------------------------------|----------|-----------------|---------------|
| MF | Pitch mm | Max Core Dia.mm | Drill Size mm |
| 2.5 | 0.35 | 2.221 | 2.15 |
| 3 | 0.35 | 2.271 | 2.65 |
| 3.5 | 0.35 | 3.221 | 3.15 |
| 4 | 0.50 | 3.599 | 3.50 |
| 4.5 | 0.50 | 4.099 | 4.00 |
| 5 | 0.50 | 4.599 | 4.50 |
| 5.5 | 0.50 | 5.099 | 5.00 |
| 6 | 0.75 | 5.378 | 5.20 |
| 7 | 0.75 | 6.378 | 6.20 |
| 8 | 0.75 | 7.378 | 7.20 |
| 8 | 1.00 | 7.153 | 7.00 |
| 9 | 0.75 | 8.378 | 8.20 |
| 9 | 1.00 | 8.153 | 8.00 |
| 10 | 0.75 | 9.378 | 9.20 |
| 10 | 1.00 | 9.153 | 9.00 |
| 10 | 1.25 | 8.912 | 8.80 |
| 11 | 0.75 | 10.378 | 10.20 |
| 11 | 1.00 | 10.153 | 10.00 |
| 12 | 1.00 | 11.153 | 11.00 |
| 12 | 1,25 | 10.912 | 10.80 |
| 12 | 1,50 | 10.676 | 10.50 |
| 14 | 1,00 | 13.153 | 13.00 |
| 14 | 1,25 | 12.912 | 12.80 |
| 14 | 1.50 | 12.676 | 12.50 |
| 15 | 1.00 | 14.153 | 14.00 |
| 15 | 1.50 | 13.676 | 13.50 |
| 16 | 1.00 | 15.153 | 15.00 |
| 16 | 1.50 | 14.676 | 14.50 |
| 17 | 1.00 | 16.153 | 16.00 |
| 17 | 1.50 | 15.676 | 15.50 |
| 18 | 1.00 | 17.153 | 17.00 |
| 18 | 1.50 | 16.676 | 16.50 |
| 18 | 2.00 | 16.210 | 16.00 |
| 20 | 1.00 | 19.153 | 19.00 |
| 20 | 1.50 | 18.676 | 18.50 |
| 20 | 2.00 | 18.210 | 18.00 |
| 22 | 1,00 | 21.153 | 21.00 |
| 22 | 1.50 | 20.676 | 20.50 |
| 22 | 2.00 | 20.210 | 20.00 |
| 24 | 1.00 | 23.153 | 23.00 |
| 24 | 1,50 | 22.676 | 22.50 |
| 24 | 2,00 | 22.210 | 22.00 |
| 25 | 1.00 | 24.153 | 24.00 |
| 25 | 1.50 | 23.676 | 23.50 |

| ISO Metric Threads Fine Pitch | | | |
|-------------------------------|----------|-----------------|---------------|
| MF | Pitch mm | Max Core Dia.mm | Drill Size mm |
| 25 | 2.00 | 23.210 | 23.00 |
| 26 | 1.50 | 24.676 | 24.50 |
| 27 | 1.00 | 26.153 | 26.00 |
| 27 | 1.50 | 25.676 | 25.50 |
| 27 | 2.00 | 25.210 | 25.00 |
| 28 | 1.00 | 27.153 | 27.00 |
| 28 | 1.50 | 26.676 | 26.50 |
| 28 | 2.00 | 26.210 | 26.00 |
| 30 | 1.00 | 29.153 | 29.00 |
| 30 | 1.50 | 28.676 | 28.50 |
| 30 | 2.00 | 28.210 | 28.00 |
| 30 | 3.00 | 27.252 | 27.00 |
| 32 | 1.50 | 30.675 | 30.50 |
| 32 | 2.00 | 30.210 | 30.00 |
| 33 | 1.50 | 31.676 | 31.50 |
| 33 | 2.00 | 31.210 | 31.00 |
| 33 | 3.00 | 30.252 | 30.00 |
| 35 | 1.50 | 33.676 | 33.50 |
| 36 | 1.50 | 34.676 | 34.50 |
| 36 | 2.00 | 34.210 | 34.00 |
| 36 | 3.00 | 33.252 | 33.00 |
| 38 | 1.50 | 36.676 | 36.50 |
| 39 | 1.50 | 37.676 | 37.50 |
| 39 | 2.00 | 37.210 | 37.00 |
| 39 | 3.00 | 36.252 | 36.00 |
| 40 | 1.50 | 38.676 | 38.50 |
| 40 | 2.00 | 38.210 | 38.00 |
| 40 | 3,00 | 37.252 | 37.00 |
| 42 | 1.50 | 40.676 | 40.50 |
| 42 | 2.00 | 40.210 | 40.00 |
| 42 | 3,00 | 39.252 | 39.00 |
| 45 | 1.50 | 43.676 | 43.50 |
| 45 | 2.00 | 43.210 | 43.00 |
| 45 | 3.00 | 42.252 | 42.00 |
| 48 | 1.50 | 46.676 | 46.50 |
| 48 | 2.00 | 46.210 | 46.00 |
| 48 | 3.00 | 45.252 | 45.00 |
| 50 | 1.50 | 48.676 | 48.50 |
| 50 | 2.00 | 48.210 | 48.00 |
| 50 | 3.00 | 47.252 | 47.00 |
| 52 | 1.50 | 50.676 | 50.50 |
| 52 | 2.00 | 50.210 | 50.00 |
| 52 | 3.00 | 49.252 | 49.00 |

Pre-Tapping Hole Sizes - Forming Taps


| Recommended Tap Drill Size | | | Recommended Tap Drill Size | | |
|----------------------------|----------|---------------|----------------------------|----------|---------------|
| M | Pitch mm | Drill Size mm | MF | Pitch mm | Drill Size mm |
| 1 | 0.25 | 0.9 | 2.5 | 0.35 | 2.37 |
| 1.1 | 0.25 | 1 | 2.6 | 0.35 | 2.47 |
| 1.2 | 0.25 | 1.1 | 3 | 0.35 | 2.88 |
| 1.4 | 0.3 | 1.28 | 3.5 | 0.35 | 3.38 |
| 1.6 | 0.35 | 1.47 | 4 | 0.5 | 3.8 |
| 1.7 | 0.35 | 1.57 | 5 | 0.5 | 4.8 |
| 1.8 | 0.35 | 1.67 | 6 | 0.5 | 5.8 |
| 2 | 0.4 | 1.85 | 6 | 0.75 | 5.7 |
| 2.2 | 0.45 | 2.03 | 7 | 0.75 | 6.7 |
| 2.3 | 0.4 | 2.15 | 8 | 0.75 | 7.7 |
| 2.5 | 0.45 | 2.33 | 8 | 1 | 7.6 |
| 2.6 | 0.45 | 2.43 | 9 | 0.75 | 8.7 |
| 3 | 0.5 | 2.8 | 9 | 1 | 8.6 |
| 3.5 | 0.6 | 3.25 | 10 | 0.75 | 9.7 |
| 4 | 0.7 | 3.7 | 10 | 1 | 9.6 |
| 4.5 | 0.75 | 4.2 | 10 | 1.25 | 9.45 |
| 5 | 0.8 | 4.65 | 11 | 1 | 10.6 |
| 6 | 1 | 5.55 | 12 | 1 | 11.6 |
| 7 | 1 | 6.55 | 12 | 1.25 | 11.45 |
| 8 | 1.25 | 6.6 | 12 | 1.5 | 11.35 |
| 9 | 1.25 | 7.45 | 14 | 1 | 13.6 |
| 10 | 1.5 | 8.45 | 14 | 1.25 | 13.45 |
| 11 | 1.5 | 9.35 | 14 | 1.5 | 13.35 |
| 12 | 1.75 | 11.25 | 15 | 1 | 14.6 |
| 14 | 2 | 13.1 | 15 | 1.5 | 14.35 |
| 16 | 2 | 15.1 | 16 | 1 | 15.6 |
| 18 | 2.5 | 16.85 | 16 | 1.5 | 15.35 |
| 20 | 2.5 | 18.85 | 18 | 4 | 17.6 |
| 22 | 2.5 | 20.85 | 18 | 1.5 | 17.35 |
| 24 | 3 | 22.65 | 18 | 2 | 17.1 |
| 27 | 3 | 25.65 | 20 | 1 | 19.6 |
| 30 | 3.5 | 28.4 | 20 | 1.5 | 19.35 |
| 33 | 3.5 | 31.4 | 20 | 2 | 19.1 |
| 36 | 4 | 34.15 | 24 | 2 | 23.1 |
| 39 | 4 | 37.15 | 30 | 2 | 29.1 |
| 42 | 4.5 | 39.9 | 36 | 3 | 34.65 |
| 45 | 4.5 | 42.9 | 42 | 4 | 40.15 |
| 48 | 5 | 45.65 | 48 | 3 | 46.65 |

Pre-Tapping Hole Sizes - General Taps

| American Unified Coarse Threads | | | | American Unified Fine Threads | | | |
|---------------------------------|-------|---------------------|---------------|-------------------------------|-------|---------------------|---------------|
| UNC | T.P.I | Max. Core Dia. Inch | Drill Size mm | UNF | T.P.I | Max. Core Dia. Inch | Drill Size mm |
| #1 | 64 | 1.585 | 1.5 | #0 | 80 | 1.306 | 1.3 |
| #2 | 56 | 1.872 | 1.8 | #1 | 72 | 1.613 | 1.6 |
| #3 | 48 | 2.146 | 2.1 | #2 | 64 | 1.913 | 1.9 |
| #4 | 40 | 2.385 | 2.3 | #3 | 56 | 2.197 | 2.1 |
| #5 | 40 | 2.697 | 2.6 | #4 | 48 | 2.459 | 2.4 |
| #6 | 32 | 2.896 | 2.85 | #5 | 44 | 2.741 | 2.7 |
| #8 | 32 | 3.528 | 3.5 | #6 | 40 | 3.012 | 3 |
| #10 | 24 | 3.95 | 3.9 | #8 | 36 | 3.597 | 3.5 |
| #12 | 24 | 4.59 | 4.5 | #10 | 32 | 4.168 | 4.1 |
| 1/4" | 20 | 5.25 | 5.2 | #12 | 28 | 4.717 | 4.7 |
| 5/16" | 18 | 6.68 | 6.6 | 1/4" | 28 | 5.563 | 5.5 |
| 3/8" | 16 | 8.082 | 8 | 5/16" | 24 | 6.995 | 6.9 |
| 7/16" | 14 | 9.441 | 9.4 | 3/8" | 24 | 8.565 | 8.5 |
| 1/2" | 13 | 10.881 | 10.75 | 7/16" | 20 | 9.947 | 9.9 |
| 9/16" | 12 | 12.301 | 12.25 | 1/2" | 20 | 11.524 | 11.5 |
| 5/8" | 11 | 13.693 | 13.5 | 9/16" | 18 | 12.969 | 12.9 |
| 3/4" | 10 | 16.624 | 16.5 | 5/8" | 18 | 14.554 | 14.5 |
| 7/8" | 9 | 19.52 | 19.5 | 3/4" | 16 | 17.546 | 17.5 |
| 1" | 8 | 22.344 | 22.25 | 7/8" | 14 | 20.493 | 20.5 |
| 1*1/8" | 7 | 25.082 | 25 | 1" | 12 | 23.363 | 23.25 |
| 1*1/4" | 7 | 28.258 | 28.25 | 1*1/8" | 12 | 26.538 | 26.5 |
| 1*3/8" | 6 | 30.851 | 30.75 | 1*1/4" | 12 | 29.713 | 29.5 |
| 1*1/2" | 6 | 34.026 | 34 | 1*3/8" | 12 | 32.888 | 32.7 |
| 1*3/4" | 5 | 39.56 | 39.5 | 1*1/2" | 12 | 36.063 | 36 |
| 2" | 4.5 | 45.367 | 45.25 | | | | |

ISO Metric Thread
Nominal Dimensions According to UNI 4535-64

tap flank diameter production tolerances for iso 6h nut threads limit dimensions - nut threads iso 6h

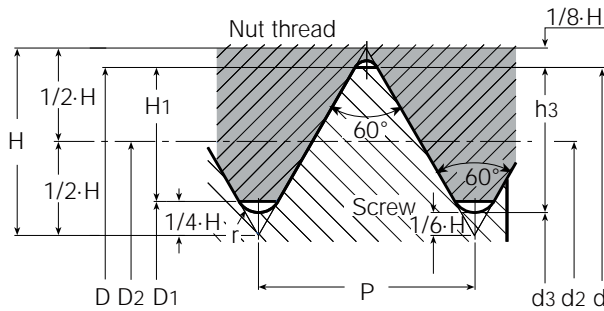

coarse pitch threads dimensions in mm

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$


$$d_3 = d - 2h_3 = d - 1.22687P$$

$$r = \frac{H}{6} = 0.14434P$$

| Nominal Dia. d=D | Pitch P | Flank Dia. D2=D2 | Minor Diameter | | Thread Depth | | Radius r | Flank Dia. Tap Tolerance 6H D2 | | Flank Dia. Tap Tolerance 6H | |
|--|---------|------------------|----------------|--------|--------------|--------|----------|--------------------------------|--------|-----------------------------|--------|
| | | | Screw D3 | Nut D1 | Screw H3 | Nut H1 | | Min. | Max. | Min. | Max. |
| M1.6 | 0.35 | 1.373 | 1.171 | 1.221 | 0.215 | 0.189 | 0.051 | 1.393 | 1.407 | 1.373 | 1.458 |
| M1.8 | 0.35 | 1.573 | 1.371 | 1.421 | 0.215 | 0.189 | 0.051 | 1.593 | 1.607 | 1.573 | 1.658 |
| M2 | 0.4 | 1.740 | 1.509 | 1.567 | 0.245 | 0.217 | 0.058 | 1.761 | 1.776 | 1.740 | 1.830 |
| M2.2 | 0.45 | 1.908 | 1.648 | 1.713 | 0.276 | 0.244 | 0.065 | 1.931 | 1.946 | 1.908 | 2.003 |
| M2.5 | 0.45 | 2.208 | 1.948 | 2.013 | 0.276 | 0.244 | 0.065 | 2.231 | 2.246 | 2.208 | 2.303 |
| M3 | 0.5 | 2.675 | 2.387 | 2.459 | 0.307 | 0.271 | 0.072 | 2.699 | 2.715 | 2.675 | 2.775 |
| M3.5 | 0.6 | 3.110 | 2.764 | 2.850 | 0.368 | 0.325 | 0.087 | 3.137 | 3.155 | 3.110 | 3.222 |
| M4 | 0.7 | 3.545 | 3.141 | 3.242 | 0.429 | 0.379 | 0.101 | 3.574 | 3.593 | 3.545 | 3.663 |
| M4.5 | 0.75 | 4.013 | 3.580 | 3.688 | 0.460 | 0.406 | 0.108 | 4.042 | 4.061 | 4.013 | 4.131 |
| M5 | 0.8 | 4.480 | 4.019 | 4.134 | 0.491 | 0.433 | 0.115 | 4.510 | 4.530 | 4.480 | 4.605 |
| M6 | 1 | 5.350 | 4.773 | 4.917 | 0.613 | 0.541 | 0.144 | 5.385 | 5.409 | 5.350 | 5.500 |
| M7 | 1 | 6.350 | 5.773 | 5.917 | 0.613 | 0.541 | 0.144 | 6.385 | 6.409 | 6.350 | 6.500 |
| M8 | 1.25 | 7.188 | 6.466 | 6.647 | 0.767 | 0.677 | 0.180 | 7.226 | 7.251 | 7.188 | 7.348 |
| M9 | 1.25 | 8.188 | 7.466 | 7.647 | 0.767 | 0.677 | 0.180 | 8.226 | 8.251 | 8.188 | 8.348 |
| M10 | 1.5 | 9.026 | 8.160 | 8.376 | 0.920 | 0.812 | 0.217 | 9.068 | 9.096 | 9.026 | 9.206 |
| M11 | 1.5 | 10.026 | 9.160 | 9.376 | 0.920 | 0.812 | 0.217 | 10.068 | 10.096 | 10.026 | 10.206 |
| M12 | 1.75 | 10.863 | 9.853 | 10.106 | 1.074 | 0.947 | 0.253 | 10.911 | 10.943 | 10.863 | 11.063 |
| M14 | 2 | 12.701 | 11.546 | 11.835 | 1.227 | 1.083 | 0.289 | 12.752 | 12.786 | 12.701 | 12.913 |
| M16 | 2 | 14.701 | 13.546 | 13.835 | 1.227 | 1.083 | 0.289 | 14.752 | 14.786 | 14.701 | 14.913 |
| M18 | 2.5 | 16.376 | 14.933 | 15.294 | 1.534 | 1.353 | 0.361 | 16.430 | 16.466 | 16.376 | 16.600 |
| M20 | 2.5 | 18.376 | 16.933 | 17.294 | 1.534 | 1.353 | 0.361 | 18.430 | 18.466 | 18.376 | 18.600 |
| M22 | 2.5 | 20.376 | 18.933 | 19.294 | 1.534 | 1.353 | 0.361 | 20.430 | 20.466 | 20.376 | 20.600 |
| M24 | 3 | 22.051 | 20.319 | 20.752 | 1.840 | 1.624 | 0.433 | 22.115 | 22.157 | 22.051 | 22.316 |
| M27 | 3 | 25.051 | 23.319 | 23.752 | 1.840 | 1.624 | 0.433 | 25.115 | 25.157 | 25.051 | 25.316 |
| M30 | 3.5 | 27.727 | 25.706 | 26.211 | 2.147 | 1.894 | 0.505 | 27.794 | 27.839 | 27.727 | 28.007 |
| M33 | 3.5 | 30.727 | 28.706 | 29.211 | 2.147 | 1.894 | 0.505 | 30.794 | 30.839 | 30.727 | 31.007 |
| M36 | 4 | 33.402 | 31.093 | 31.670 | 2.454 | 2.165 | 0.577 | 33.473 | 33.520 | 33.402 | 33.702 |
| M39 | 4 | 36.402 | 34.093 | 34.670 | 2.454 | 2.165 | 0.577 | 36.473 | 36.520 | 36.402 | 36.702 |
| M42 | 4.5 | 39.077 | 36.479 | 37.129 | 2.760 | 2.436 | 0.650 | 39.152 | 39.202 | 39.077 | 39.392 |
| M45 | 4.5 | 42.077 | 39.479 | 40.129 | 2.760 | 2.436 | 0.650 | 42.152 | 42.202 | 42.077 | 42.392 |
| M48 | 5 | 44.752 | 41.866 | 42.587 | 3.067 | 2.706 | 0.722 | 44.832 | 44.885 | 44.752 | 45.087 |
| M52 | 5 | 48.752 | 45.866 | 46.587 | 3.067 | 2.706 | 0.722 | 48.832 | 48.885 | 48.752 | 49.087 |
| M56 | 5.5 | 52.428 | 49.252 | 50.046 | 3.374 | 2.977 | 0.794 | 52.512 | 52.568 | 52.428 | 52.783 |
| M60 | 5.5 | 56.428 | 53.252 | 54.046 | 3.374 | 2.977 | 0.794 | 56.512 | 56.568 | 56.428 | 56.783 |
| M64 | 6 | 60.103 | 56.639 | 57.505 | 3.681 | 3.248 | 0.866 | 60.193 | 60.253 | 60.103 | 60.478 |
| M68 | 6 | 64.103 | 60.639 | 61.505 | 3.681 | 3.248 | 0.866 | 64.193 | 64.253 | 64.103 | 64.478 |
| Metric Thread MA (Old UNI 159 Profile) | | | | | | | | Nut Tolerance SH8 | | | |
| M1.7 | 0.35 | 1.473 | 1.246 | 1.246 | 0.227 | 0.227 | 0.040 | 1.493 | 1.507 | 1.473 | 1.529 |
| M2.3 | 0.4 | 2.040 | 1.780 | 1.780 | 0.260 | 0.260 | 0.040 | 2.061 | 2.076 | 2.040 | 2.120 |
| M2.6 | 0.45 | 2.308 | 2.016 | 2.016 | 0.292 | 0.292 | 0.050 | 2.331 | 2.346 | 2.308 | 2.388 |

ISO Metric Fine Thread Nominal Dimensions According to UNI 4535-64

tap flank diameter production tolerances for iso 6h nut threads limit dimensions - nut threads iso 6h

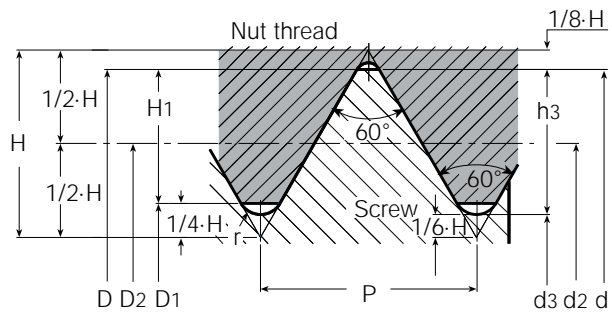

coarse pitch threads dimensions in mm

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$


$$d_3 = d - 2h_3 = d - 1.22687P$$

$$r = \frac{H}{6} = 0.14434P$$

| Nominal Dia. d=D | Pitch P | Flank Dia. D2=D2 | Minor Diameter | | Thread Depth | | Radius r | Flank Dia. Tap Tolerance 6H D2 | | Flank Dia. Tap Tolerance 6H | |
|------------------|---------|------------------|----------------|--------|--------------|--------|----------|--------------------------------|--------|-----------------------------|--------|
| | | | Screw D3 | Nut D1 | Screw H3 | Nut H1 | | Min. | Max. | Min. | Max. |
| M 2 | 0.25 | 1.838 | 1.693 | 1.729 | 0.153 | 0.135 | 0.036 | 1.844 | 1.856 | 1.838 | 1.886 |
| M 2.5 | 0.35 | 2.273 | 2.701 | 2.121 | 0.215 | 0.189 | 0.051 | 2.293 | 2.307 | 2.273 | 2.358 |
| M 3 | 0.35 | 2.773 | 2.571 | 2.621 | 0.215 | 0.189 | 0.051 | 2.794 | 2.809 | 2.773 | 2.863 |
| M 3.5 | 0.35 | 3.273 | 3.071 | 3.121 | 0.215 | 0.189 | 0.051 | 3.294 | 3.309 | 3.273 | 3.363 |
| M 4 | 0.5 | 3.675 | 3.387 | 3.459 | 0.307 | 0.271 | 0.072 | 3.699 | 3.715 | 3.675 | 3.775 |
| M 4.5 | 0.5 | 4.175 | 3.887 | 3.959 | 0.307 | 0.271 | 0.072 | 4.199 | 4.215 | 4.175 | 4.275 |
| M 5 | 0.5 | 4.675 | 4.387 | 4.459 | 0.307 | 0.271 | 0.072 | 4.699 | 4.715 | 4.675 | 4.775 |
| M 5.5 | 0.5 | 5.175 | 4.887 | 4.959 | 0.307 | 0.271 | 0.072 | 5.199 | 5.215 | 5.175 | 5.275 |
| M 6 | 0.5 | 5.675 | 5.387 | 5.459 | 0.307 | 0.271 | 0.072 | 5.702 | 5.72 | 5.675 | 5.787 |
| M 6 | 0.75 | 5.513 | 5.08 | 5.188 | 0.46 | 0.406 | 0.108 | 5.545 | 5.566 | 5.513 | 5.645 |
| M 7 | 0.75 | 6.513 | 6.08 | 6.188 | 0.46 | 0.406 | 0.108 | 6.545 | 6.566 | 6.513 | 6.645 |
| M 8 | 0.5 | 7.675 | 7.387 | 7.459 | 0.307 | 0.271 | 0.072 | 7.702 | 7.72 | 7.675 | 7.787 |
| M 8 | 0.75 | 7.513 | 7.08 | 7.188 | 0.46 | 0.406 | 0.108 | 7.545 | 7.566 | 7.513 | 7.645 |
| M 8 | 1 | 7.35 | 6.773 | 6.917 | 0.613 | 0.541 | 0.144 | 7.835 | 7.409 | 7.35 | 7.5 |
| M 9 | 0.75 | 8.513 | 8.08 | 8.188 | 0.46 | 0.406 | 0.108 | 8.545 | 8.566 | 8.513 | 8.645 |
| M 9 | 1 | 8.35 | 7.773 | 7.917 | 0.613 | 0.541 | 0.144 | 8.385 | 8.409 | 8.35 | 8.5 |
| M 10 | 0.5 | 9.675 | 9.387 | 9.459 | 0.307 | 0.271 | 0.072 | 9.702 | 9.72 | 9.675 | 9.787 |
| M 10 | 0.75 | 9.513 | 9.08 | 9.188 | 0.46 | 0.406 | 0.108 | 9.545 | 9.566 | 9.513 | 9.645 |
| M 10 | 1 | 9.35 | 8.773 | 8.917 | 0.613 | 0.541 | 0.144 | 9.385 | 9.409 | 9.35 | 9.5 |
| M 10 | 1.25 | 9.188 | 8.466 | 8.647 | 0.767 | 0.677 | 0.18 | 9.226 | 9.251 | 9.188 | 9.348 |
| M 11 | 0.75 | 10.513 | 10.08 | 10.188 | 0.46 | 0.406 | 0.108 | 10.545 | 10.566 | 10.513 | 10.645 |
| M 11 | 1 | 10.35 | 9.773 | 9.917 | 0.613 | 0.541 | 0.144 | 10.385 | 10.409 | 10.35 | 10.5 |
| M 12 | 0.75 | 11.513 | 11.08 | 11.188 | 0.46 | 0.406 | 0.108 | 11.547 | 11.569 | 11.513 | 11.653 |
| M 12 | 1 | 11.35 | 10.773 | 10.917 | 0.613 | 0.541 | 0.144 | 11.388 | 11.413 | 11.35 | 11.51 |
| M 12 | 1.25 | 11.188 | 10.466 | 10.647 | 0.767 | 0.677 | 0.18 | 11.23 | 11.258 | 11.188 | 11.368 |
| M 12 | 1.5 | 11.026 | 10.16 | 10.376 | 0.92 | 0.812 | 0.217 | 11.071 | 11.101 | 11.026 | 11.216 |
| M 13 | 1 | 12.35 | 11.773 | 11.917 | 0.613 | 0.541 | 0.144 | 12.388 | 12.413 | 12.35 | 12.51 |
| M 14 | 1 | 13.35 | 12.773 | 12.917 | 0.613 | 0.541 | 0.144 | 13.388 | 13.413 | 13.35 | 13.51 |
| M 14 | 1.25 | 13.188 | 12.466 | 12.647 | 0.767 | 0.677 | 0.18 | 13.23 | 13.258 | 13.188 | 13.368 |
| M 14 | 1.5 | 13.026 | 12.16 | 12.376 | 0.92 | 0.812 | 0.217 | 13.071 | 13.101 | 13.026 | 13.216 |
| M 15 | 1 | 14.35 | 13.773 | 13.917 | 0.613 | 0.541 | 0.144 | 14.388 | 14.413 | 14.35 | 14.51 |
| M 15 | 1.5 | 14.026 | 13.16 | 13.376 | 0.92 | 0.812 | 0.217 | 14.071 | 14.101 | 14.026 | 14.216 |
| M 16 | 1 | 15.35 | 14.773 | 14.917 | 0.613 | 0.541 | 0.144 | 15.388 | 15.413 | 15.35 | 15.51 |
| M 16 | 1.25 | 15.188 | 14.466 | 14.647 | 0.767 | 0.677 | 0.18 | 15.23 | 15.258 | 15.188 | 15.368 |
| M 16 | 1.5 | 15.026 | 14.16 | 14.376 | 0.92 | 0.812 | 0.217 | 15.071 | 15.101 | 15.026 | 15.216 |
| M 17 | 1 | 16.35 | 15.773 | 15.917 | 0.613 | 0.541 | 0.144 | 16.388 | 16.413 | 16.35 | 16.51 |
| M 17 | 1.5 | 16.026 | 15.16 | 15.376 | 0.92 | 0.812 | 0.217 | 16.071 | 16.101 | 16.026 | 16.216 |
| M 18 | 1 | 17.350 | 16.773 | 16.917 | 0.613 | 0.541 | 0.144 | 17.388 | 17.413 | 17.35 | 17.51 |
| M 18 | 1.5 | 17.026 | 16.16 | 16.376 | 0.92 | 0.812 | 0.217 | 17.071 | 17.101 | 17.026 | 17.216 |
| M 18 | 2 | 16.701 | 15.546 | 15.835 | 1.227 | 1.083 | 0.289 | 16.752 | 16.786 | 16.701 | 16.913 |

ISO Metric Fine Thread
Nominal Dimensions According to UNI 4535-64

tap flank diameter production tolerances for iso 6h nut threads limit dimensions - nut threads iso 6h

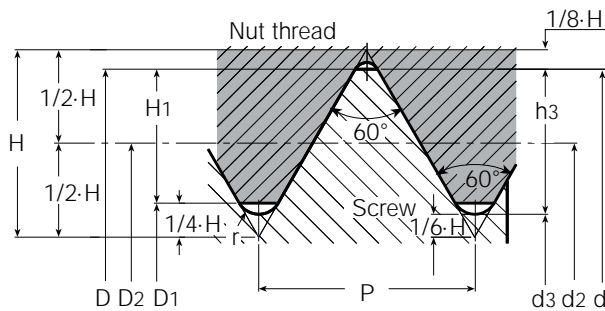

coarse pitch threads dimensions in mm

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$


$$d_3 = d - 2h_3 = d - 1.22687P$$

$$r = \frac{H}{6} = 0.14434P$$

| Nominal Dia. d=D | Pitch P | Flank Dia. D2=D2 | Minor Diameter | | Thread Depth | | Radius r | Flank Dia. Tap Tolerance 6H D2 | | Flank Dia. Tap Tolerance 6H | |
|------------------|---------|------------------|----------------|--------|--------------|--------|----------|--------------------------------|--------|-----------------------------|--------|
| | | | Screw D3 | Nut D1 | Screw H3 | Nut H1 | | Min. | Max. | Min. | Max. |
| | | | | | | | | | | | |
| M 20 | 1 | 19.35 | 18.773 | 18.917 | 0.613 | 0.541 | 0.144 | 19.388 | 19.413 | 19.35 | 19.51 |
| M 20 | 1.5 | 19.026 | 18.16 | 18.376 | 0.92 | 0.812 | 0.217 | 19.071 | 19.101 | 19.026 | 19.216 |
| M 20 | 2 | 18.701 | 17.546 | 17.835 | 1.227 | 1.083 | 0.289 | 18.752 | 18.786 | 18.701 | 18.913 |
| M 22 | 1 | 21.35 | 20.773 | 20.917 | 0.613 | 0.541 | 0.144 | 21.388 | 21.413 | 21.35 | 21.51 |
| M 22 | 1.5 | 21.026 | 20.16 | 20.376 | 0.92 | 0.812 | 0.217 | 21.071 | 21.101 | 21.026 | 21.216 |
| M 22 | 2 | 20.701 | 19.546 | 19.835 | 1.227 | 1.083 | 0.289 | 20.752 | 20.786 | 20.701 | 20.913 |
| M 24 | 1 | 23.350 | 22.773 | 22.917 | 0.613 | 0.541 | 0.144 | 23.390 | 23.416 | 23.350 | 23.520 |
| M 24 | 1.5 | 23.026 | 22.160 | 22.376 | 0.920 | 0.812 | 0.217 | 23.074 | 23.106 | 23.026 | 23.226 |
| M 24 | 2 | 22.701 | 21.546 | 21.835 | 1.227 | 1.083 | 0.289 | 22.754 | 22.791 | 22.701 | 22.925 |
| M 25 | 1 | 24.350 | 23.773 | 23.917 | 0.613 | 0.541 | 0.144 | 24.390 | 24.416 | 24.350 | 24.520 |
| M 25 | 1.5 | 24.026 | 23.160 | 23.376 | 0.920 | 0.812 | 0.217 | 24.074 | 24.106 | 24.026 | 24.226 |
| M 25 | 2 | 23.701 | 22.546 | 22.835 | 1.227 | 1.083 | 0.289 | 23.754 | 23.791 | 23.701 | 23.925 |
| M 26 | 1 | 25.350 | 24.773 | 24.917 | 0.613 | 0.541 | 0.144 | 25.390 | 25.416 | 25.350 | 25.520 |
| M 26 | 1.5 | 25.026 | 24.160 | 24.376 | 0.920 | 0.812 | 0.217 | 25.074 | 25.106 | 25.026 | 25.226 |
| M 26 | 2 | 24.701 | 23.546 | 23.835 | 1.227 | 1.083 | 0.289 | 24.754 | 24.791 | 24.701 | 24.925 |
| M 27 | 1 | 26.350 | 25.773 | 25.917 | 0.613 | 0.541 | 0.144 | 26.390 | 26.416 | 26.350 | 26.520 |
| M 27 | 1.5 | 26.026 | 25.160 | 25.376 | 0.920 | 0.812 | 0.217 | 26.074 | 26.106 | 26.026 | 26.226 |
| M 27 | 2 | 25.701 | 24.546 | 24.835 | 1.227 | 1.083 | 0.289 | 25.754 | 25.791 | 25.701 | 25.925 |
| M 28 | 1 | 27.350 | 26.773 | 26.917 | 0.613 | 0.541 | 0.144 | 27.390 | 27.416 | 27.350 | 27.520 |
| M 28 | 1.5 | 27.026 | 26.160 | 26.376 | 0.920 | 0.812 | 0.217 | 27.074 | 27.106 | 27.026 | 27.226 |
| M 28 | 2 | 26.701 | 25.546 | 25.835 | 1.227 | 1.083 | 0.289 | 26.754 | 26.791 | 26.701 | 26.925 |
| M 30 | 1 | 29.350 | 28.773 | 28.917 | 0.613 | 0.541 | 0.144 | 29.390 | 29.416 | 29.350 | 29.520 |
| M 30 | 1.5 | 29.026 | 28.160 | 28.376 | 0.920 | 0.812 | 0.217 | 29.074 | 29.106 | 29.026 | 29.226 |
| M 30 | 2 | 28.701 | 27.546 | 27.835 | 1.227 | 1.083 | 0.289 | 28.754 | 28.791 | 28.701 | 28.925 |
| M 30 | 3 | 28.051 | 26.319 | 26.752 | 1.840 | 1.624 | 0.433 | 28.115 | 28.157 | 28.051 | 28.316 |
| M 32 | 1.5 | 31.026 | 30.160 | 30.376 | 0.920 | 0.812 | 0.217 | 31.074 | 31.106 | 31.026 | 31.226 |
| M 32 | 2 | 30.701 | 29.546 | 29.835 | 1.227 | 1.083 | 0.289 | 30.754 | 30.791 | 30.701 | 30.925 |
| M 33 | 1.5 | 32.026 | 31.160 | 31.376 | 0.920 | 0.812 | 0.217 | 32.074 | 32.106 | 32.026 | 32.226 |
| M 33 | 2 | 31.701 | 30.546 | 30.835 | 1.227 | 1.083 | 0.289 | 31.754 | 31.791 | 31.701 | 31.925 |
| M 33 | 3 | 31.051 | 29.319 | 29.752 | 1.840 | 1.624 | 0.433 | 31.115 | 31.157 | 31.051 | 31.316 |
| M 35 | 1.5 | 34.026 | 33.160 | 33.376 | 0.920 | 0.812 | 0.217 | 34.074 | 34.106 | 34.026 | 34.226 |
| M 35 | 2 | 33.701 | 32.546 | 32.835 | 1.227 | 1.083 | 0.289 | 33.754 | 33.791 | 33.701 | 33.925 |
| M 36 | 1.5 | 35.026 | 34.160 | 34.376 | 0.920 | 0.812 | 0.217 | 35.074 | 35.106 | 35.026 | 35.226 |
| M 36 | 2 | 34.701 | 33.546 | 33.835 | 1.227 | 1.083 | 0.289 | 34.754 | 34.791 | 34.701 | 34.925 |
| M 36 | 3 | 34.051 | 32.319 | 32.752 | 1.840 | 1.624 | 0.433 | 34.115 | 34.157 | 34.051 | 34.316 |
| M 38 | 1.5 | 37.026 | 36.160 | 36.376 | 0.920 | 0.812 | 0.217 | 37.074 | 37.106 | 37.026 | 37.226 |
| M 39 | 1.5 | 38.026 | 37.160 | 37.376 | 0.920 | 0.812 | 0.217 | 38.074 | 38.106 | 38.026 | 38.226 |
| M 39 | 2 | 37.701 | 36.546 | 36.835 | 1.227 | 1.083 | 0.289 | 37.754 | 37.791 | 37.701 | 37.925 |
| M 39 | 3 | 37.051 | 35.319 | 35.752 | 1.840 | 1.624 | 0.433 | 37.115 | 37.157 | 37.051 | 37.316 |
| M 40 | 1.5 | 39.026 | 38.160 | 38.376 | 0.920 | 0.812 | 0.217 | 39.074 | 39.106 | 39.026 | 39.226 |

ISO Metric Fine Thread
Nominal Dimensions According to UNI 4535-64

tap flank diameter production tolerances for iso 6h nut threads limit dimensions - nut threads iso 6h

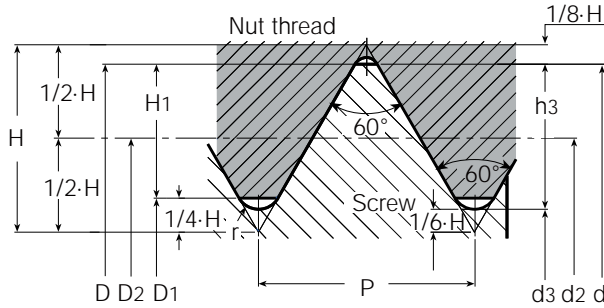

coarse pitch threads dimensions in mm

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$


$$d_3 = d - 2h_3 = d - 1.22687P$$

$$r = \frac{H}{6} = 0.14434P$$

| Nominal Dia. d=D | Pitch P | Flank Dia. D2=D2 | Minor Diameter | | Thread Depth | | Radius r | Flank Dia. Tap Tolerance 6H D2 | | Flank Dia. Tap Tolerance 6H | |
|---|---------|------------------|----------------|--------|--------------|--------|----------|--------------------------------|--------|-----------------------------|--------|
| | | | Screw D3 | Nut D1 | Screw H3 | Nut H1 | | Min. | Max. | Min. | Max. |
| M 40 | 2 | 38.701 | 37.546 | 37.835 | 1.227 | 1.083 | 0.289 | 38.754 | 38.791 | 38.701 | 38.925 |
| M 40 | 3 | 38.051 | 36.319 | 36.752 | 1.840 | 1.624 | 0.433 | 38.115 | 38.157 | 38.051 | 38.316 |
| M 42 | 1.5 | 41.026 | 40.160 | 40.376 | 0.920 | 0.812 | 0.217 | 41.074 | 41.106 | 41.026 | 41.226 |
| M 42 | 2 | 40.701 | 39.546 | 39.835 | 1.227 | 1.083 | 0.289 | 40.754 | 40.791 | 40.701 | 40.925 |
| M 42 | 3 | 40.051 | 38.319 | 38.752 | 1.840 | 1.624 | 0.433 | 40.115 | 40.157 | 40.051 | 40.316 |
| M 45 | 1.5 | 44.026 | 43.160 | 43.376 | 0.920 | 0.812 | 0.217 | 44.074 | 44.106 | 44.026 | 44.226 |
| M 45 | 2 | 43.701 | 42.546 | 42.835 | 1.227 | 1.083 | 0.289 | 43.754 | 43.791 | 43.701 | 43.925 |
| M 45 | 3 | 43.051 | 41.319 | 41.752 | 1.840 | 1.624 | 0.433 | 43.115 | 43.157 | 43.051 | 43.316 |
| M 48 | 1.5 | 47.026 | 46.160 | 46.376 | 0.920 | 0.812 | 0.217 | 47.077 | 47.111 | 47.026 | 47.238 |
| M 48 | 2 | 46.701 | 45.546 | 45.835 | 1.227 | 1.083 | 0.289 | 46.758 | 46.796 | 46.701 | 46.937 |
| M 48 | 3 | 46.051 | 44.319 | 44.752 | 1.840 | 1.624 | 0.433 | 46.118 | 46.163 | 46.051 | 46.331 |
| M 50 | 1.5 | 49.026 | 48.160 | 48.376 | 0.920 | 0.812 | 0.217 | 49.077 | 49.111 | 49.026 | 49.238 |
| M 50 | 2 | 48.701 | 47.546 | 47.835 | 1.227 | 1.083 | 0.289 | 48.758 | 48.796 | 48.701 | 48.937 |
| M 50 | 3 | 48.051 | 46.319 | 46.752 | 1.840 | 1.624 | 0.433 | 48.118 | 48.163 | 48.051 | 48.331 |
| M 52 | 1.5 | 51.026 | 50.160 | 50.376 | 0.920 | 0.812 | 0.217 | 51.077 | 51.111 | 51.026 | 51.238 |
| M 52 | 2 | 50.701 | 49.546 | 49.835 | 1.227 | 1.083 | 0.289 | 50.758 | 50.796 | 50.701 | 50.937 |
| M 52 | 3 | 50.051 | 48.319 | 48.752 | 1.840 | 1.624 | 0.433 | 50.118 | 50.163 | 50.051 | 50.331 |
| M 55 | 1.5 | 54.026 | 53.160 | 53.376 | 0.920 | 0.812 | 0.217 | 54.077 | 54.111 | 54.026 | 54.238 |
| M 55 | 2 | 53.701 | 52.546 | 52.835 | 1.227 | 1.083 | 0.289 | 53.758 | 53.796 | 53.701 | 53.937 |
| M 55 | 3 | 53.051 | 51.319 | 51.752 | 1.840 | 1.624 | 0.433 | 53.118 | 53.163 | 53.051 | 53.331 |
| M 56 | 1.5 | 55.026 | 54.160 | 54.376 | 0.920 | 0.812 | 0.217 | 55.077 | 55.111 | 55.026 | 55.238 |
| M 56 | 2 | 54.701 | 53.546 | 53.835 | 1.227 | 1.083 | 0.289 | 54.758 | 54.796 | 54.701 | 54.937 |
| M 56 | 3 | 54.051 | 52.319 | 52.752 | 1.840 | 1.624 | 0.433 | 54.118 | 54.163 | 54.051 | 54.331 |
| M 58 | 1.5 | 57.026 | 56.160 | 56.376 | 0.920 | 0.812 | 0.217 | 57.077 | 57.111 | 57.026 | 57.238 |
| M 58 | 2 | 56.701 | 55.546 | 55.835 | 1.227 | 1.083 | 0.289 | 56.758 | 56.796 | 56.701 | 56.937 |
| M 58 | 3 | 56.051 | 54.319 | 54.752 | 1.840 | 1.624 | 0.433 | 56.118 | 56.163 | 56.051 | 56.331 |
| M 60 | 1.5 | 59.026 | 58.160 | 58.376 | 0.920 | 0.812 | 0.217 | 59.077 | 59.111 | 59.026 | 59.238 |
| M 60 | 2 | 58.701 | 57.546 | 57.835 | 1.227 | 1.083 | 0.289 | 58.758 | 58.796 | 58.701 | 58.937 |
| M 60 | 3 | 58.051 | 56.319 | 56.752 | 1.840 | 1.624 | 0.433 | 58.118 | 58.163 | 58.051 | 58.331 |
| Metric Thread MA (Old UNI 160 Profile) | | | | | | | | Nut Tolerance SH8 | | | |
| M 2,3 | 0.25 | 2.138 | 1.976 | 1.976 | 0.162 | 0.162 | 0.03 | 2.144 | 2.156 | 2.138 | 2.194 |
| M 2,6 | 0.35 | 2.373 | 2.146 | 2.146 | 0.227 | 0.227 | 0.04 | 2.393 | 2.407 | 2.373 | 2.429 |

UNIFIED Coarse Thread
Nominal Dimensions According to ANSI B1.1

tap flank diameter production tolerances for iso 2b
 nut threads limit dimensions - nut threads ansi b1.1, 2b-3b

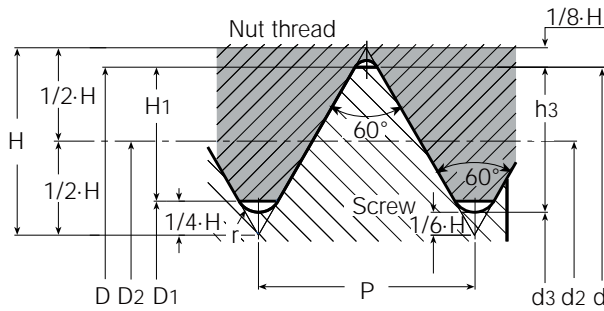

coarse pitch threads dimensions in mm

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$

$$d_3 = d - 2h_3 = d - 1.22687P$$


$$r = \frac{H}{6} = 0.14434P$$

| Nominal T.P.I Dia. | Pitch P | External Dia. d=D | Flank Dia. D2=D2 | Minor Diameter | | Pitch Diameter Tap Tolerance 2B | | Pitch Diameter Nut Tolerance | | | |
|--------------------|---------|-------------------|------------------|----------------|----------|---------------------------------|--------|------------------------------|---------|---------|--------|
| | | | | Nut D1 | Screw H3 | Min. | Max. | Max. 2B/3B | Max. 2B | Max. 3B | |
| UNC#1 | 64 | 0.397 | 1.854 | 1.598 | 1.425 | 1.367 | 1.610 | 1.623 | 1.598 | 1.664 | 1.646 |
| UNC# 2 | 64 | 0.454 | 2.184 | 1.890 | 1.694 | 1.628 | 1.902 | 1.915 | 1.890 | 1.961 | 1.943 |
| UNC#3 | 48 | 0.529 | 2.515 | 2.172 | 1.941 | 1.864 | 2.184 | 2.197 | 2.172 | 2.248 | 2.228 |
| UNC# 4 | 40 | 0.635 | 2.845 | 2.433 | 2.156 | 2.065 | 2.446 | 2.459 | 2.433 | 2.517 | 2.494 |
| UNC# 5 | 40 | 0.635 | 3.175 | 2.764 | 2.487 | 2.395 | 2.776 | 2.789 | 2.764 | 2.847 | 2.827 |
| UNC# 6 | 32 | 0.794 | 3.505 | 2.990 | 2.647 | 2.532 | 3.105 | 3.028 | 2.990 | 3.084 | 3.058 |
| UNC# 8 | 32 | 0.794 | 4.166 | 3.650 | 3.307 | 3.193 | 3.675 | 3.688 | 3.650 | 3.746 | 3.721 |
| UNC# 10 | 24 | 1.058 | 4.826 | 4.138 | 3.680 | 3.528 | 4.163 | 4.176 | 4.138 | 4.247 | 4.219 |
| UNC# 12 | 24 | 1.058 | 5.486 | 4.798 | 4.341 | 4.188 | 4.823 | 4.836 | 4.798 | 4.910 | 4.882 |
| UNC 1/4" | 20 | 1.270 | 6.350 | 5.524 | 4.976 | 4.793 | 5.575 | 5.588 | 5.524 | 5.646 | 5.616 |
| UNC 5/16" | 18 | 1.411 | 7.938 | 7.021 | 6.411 | 6.205 | 7.071 | 7.084 | 7.021 | 7.155 | 7.120 |
| UNC 3/8" | 16 | 1.588 | 9.525 | 8.494 | 7.805 | 7.577 | 8.545 | 8.557 | 8.494 | 8.639 | 8.603 |
| UNC 7/16" | 14 | 1.814 | 11.112 | 9.934 | 9.149 | 8.887 | 9.985 | 9.997 | 9.934 | 10.089 | 10.051 |
| UNC 1/2" | 13 | 1.954 | 12.700 | 11.430 | 10.584 | 10.302 | 11.481 | 11.494 | 11.430 | 11.595 | 11.552 |
| UNC 9/16" | 12 | 2.117 | 14.288 | 12.913 | 11.996 | 11.692 | 12.964 | 12.977 | 12.913 | 13.086 | 13.043 |
| UNC 5/8" | 11 | 2.309 | 15.875 | 14.376 | 13.376 | 13.043 | 14.427 | 14.440 | 14.376 | 14.559 | 14.514 |
| UNC 3/4" | 10 | 2.540 | 19.050 | 17.399 | 16.229 | 15.933 | 17.450 | 17.463 | 17.399 | 17.595 | 17.544 |
| UNC 7/8" | 9 | 2.822 | 22.225 | 20.391 | 19.169 | 18.763 | 20.455 | 20.467 | 20.391 | 20.599 | 20.546 |
| UNC 1" | 8 | 3.175 | 25.400 | 23.338 | 21.963 | 21.504 | 23.401 | 23.414 | 23.338 | 23.561 | 23.505 |
| UNC 1 1/8" | 7 | 3.629 | 28.575 | 26.218 | 24.648 | 24.122 | 26.294 | 26.319 | 26.218 | 26.457 | 26.398 |
| UNC 1 1/4" | 7 | 3.629 | 31.750 | 29.393 | 27.823 | 27.297 | 29.469 | 29.494 | 29.393 | 29.637 | 29.576 |
| UNC 1 3/8" | 6 | 4.233 | 34.925 | 32.174 | 30.343 | 29.731 | 32.250 | 32.276 | 32.174 | 32.438 | 32.372 |
| UNC 1 1/2" | 6 | 4.233 | 38.100 | 35.349 | 33.518 | 32.906 | 35.425 | 35.451 | 35.349 | 35.616 | 35.550 |
| UNC 1 3/4" | 5 | 5.080 | 44.450 | 41.151 | 38.951 | 38.217 | 41.241 | 41.266 | 41.151 | 41.445 | 41.372 |
| UNC 2" | 4 1/2 | 5.644 | 50.800 | 47.135 | 44.689 | 43.876 | 47.235 | 47.260 | 47.135 | 47.450 | 47.371 |
| UNC 2 1/4" | 4 1/2 | 5.644 | 57.150 | 53.485 | 51.039 | 50.226 | | | 53.485 | 53.805 | 53.726 |
| UNC 2 1/2" | 4 | 6.350 | 63.500 | 59.375 | 56.627 | 55.710 | | | 59.375 | 59.718 | 59.632 |
| UNC 2 3/4" | 4 | 6.350 | 69.850 | 65.725 | 62.977 | 62.060 | | | 65.725 | 66.073 | 65.987 |
| UNC 3" | 4 | 6.350 | 76.200 | 72.075 | 69.327 | 68.410 | | | 72.075 | 72.428 | 72.339 |
| UNC 3 1/4" | 4 | 6.350 | 82.550 | 78.425 | 75.677 | 74.760 | | | 78.425 | 78.783 | 78.694 |
| UNC 3 1/2" | 4 | 6.350 | 88.900 | 84.775 | 82.027 | 81.110 | | | 84.775 | 85.183 | 85.049 |
| UNC 3 3/4" | 4 | 6.350 | 95.250 | 91.125 | 88.377 | 87.460 | | | 91.125 | 91.493 | 91.402 |
| UNC 4" | 4 | 6.350 | 101.600 | 97.475 | 94.727 | 93.810 | | | 97.475 | 97.848 | 97.757 |

UNIFIED Fine Thread
Nominal Dimensions According to ANSI B1.1

tap flank diameter production tolerances for iso 2b
 nut threads limit dimensions - nut threads ansi b1.1, 2b-3b

coarse pitch threads dimensions in mm

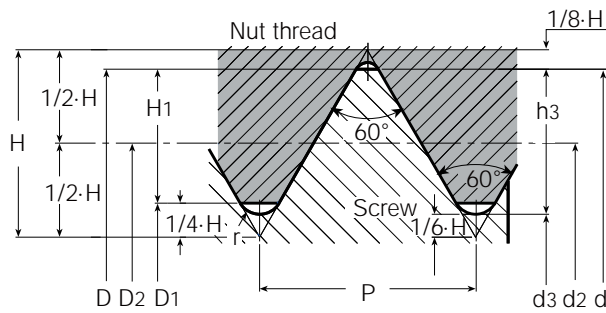

$$H = 0.86603P$$

$$H_1 = \frac{5}{8} H = 0.54127P$$

$$h_3 = \frac{17}{24} H = 0.61343P$$

$$d_2 = D_2 = d - \frac{3}{4} H = d - 0.64952P$$



$$d_3 = d - 2h_3 = d - 1.22687P$$

$$r = \frac{H}{6} = 0.14434P$$

| Nominal T.P.I Dia. | Pitch P | External Dia. d=D | Flank Dia. D2=D2 | Minor Diameter | | Pitch Diameter Tap Tolerance 2B | | Pitch Diameter Nut Tolerance | | | |
|--------------------|---------|-------------------|------------------|----------------|----------|---------------------------------|--------|------------------------------|---------|---------|--------|
| | | | | Nut D1 | Screw H3 | Min. | Max. | Max. 2B/3B | Max. 2B | Max. 3B | |
| UNF#0 | 80 | 0.318 | 1.524 | 1.318 | 1.181 | 1.135 | 1.331 | 1.344 | 1.318 | 1.377 | 1.361 |
| UNF#1 | 72 | 0.353 | 1.854 | 1.626 | 1.473 | 1.422 | 1.638 | 1.651 | 1.626 | 1.689 | 1.674 |
| UNF#2 | 64 | 0.397 | 2.184 | 1.928 | 1.755 | 1.697 | 1.941 | 1.953 | 1.928 | 1.996 | 1.979 |
| UNF#3 | 56 | 0.454 | 2.515 | 2.220 | 2.024 | 1.958 | 2.233 | 2.245 | 2.220 | 2.291 | 2.273 |
| UNF#4 | 48 | 0.529 | 2.845 | 2.502 | 2.271 | 2.195 | 2.515 | 2.527 | 2.502 | 2.581 | 2.560 |
| UNF#5 | 44 | 0.577 | 3.175 | 2.799 | 2.550 | 2.466 | 2.812 | 2.824 | 2.799 | 2.880 | 2.860 |
| UNF#6 | 40 | 0.635 | 3.505 | 3.094 | 2.817 | 2.725 | 3.108 | 3.119 | 3.094 | 3.180 | 3.157 |
| UNF#8 | 36 | 0.706 | 4.166 | 3.708 | 3.401 | 3.299 | 3.721 | 3.734 | 3.708 | 3.800 | 3.777 |
| UNF#10 | 32 | 0.794 | 4.826 | 4.310 | 3.967 | 3.853 | 4.336 | 4.348 | 4.310 | 4.409 | 4.384 |
| UNF#12 | 28 | 0.907 | 5.486 | 4.897 | 4.503 | 4.374 | 4.923 | 4.935 | 4.897 | 5.004 | 4.976 |
| UNF 1/4" | 28 | 0.907 | 6.350 | 5.761 | 5.367 | 5.237 | 5.799 | 5.812 | 5.761 | 5.870 | 5.842 |
| UNF 5/16" | 24 | 1.058 | 7.938 | 7.249 | 6.792 | 6.640 | 7.287 | 7.300 | 7.249 | 7.371 | 7.341 |
| UNF 3/8" | 24 | 1.058 | 9.525 | 8.837 | 8.379 | 8.227 | 8.875 | 8.887 | 8.837 | 8.961 | 8.931 |
| UNF 7/16" | 20 | 1.270 | 11.112 | 10.287 | 9.738 | 9.555 | 10.338 | 10.351 | 10.287 | 10.424 | 10.391 |
| UNF 1/2" | 20 | 1.270 | 12.700 | 11.874 | 11.326 | 11.143 | 11.925 | 11.938 | 11.874 | 12.017 | 11.981 |
| UNF 9/16" | 18 | 1.411 | 14.288 | 13.371 | 12.761 | 12.555 | 13.421 | 13.434 | 13.371 | 13.520 | 13.482 |
| UNF 5/8" | 18 | 1.411 | 15.875 | 14.958 | 14.348 | 14.143 | 15.009 | 15.022 | 14.958 | 15.110 | 15.072 |
| UNF 3/4" | 16 | 1.588 | 19.050 | 18.019 | 17.330 | 17.102 | 18.070 | 18.082 | 18.019 | 18.184 | 18.143 |
| UNF 7/8" | 14 | 1.814 | 22.225 | 21.046 | 20.262 | 20.000 | 21.110 | 21.123 | 21.046 | 21.224 | 21.181 |
| UNF 1" | 12 | 2.117 | 25.400 | 24.026 | 23.109 | 22.804 | 24.089 | 24.102 | 24.026 | 24.219 | 24.171 |
| UNF 1 1/8" | 12 | 2.117 | 28.575 | 27.201 | 26.284 | 25.979 | 27.252 | 27.277 | 27.201 | 27.339 | 27.351 |
| UNF 1 1/4" | 12 | 2.117 | 31.750 | 30.376 | 29.459 | 29.154 | 30.427 | 30.452 | 30.376 | 30.579 | 30.528 |
| UNF 1 3/8" | 12 | 2.117 | 34.925 | 33.551 | 32.634 | 32.329 | 33.602 | 33.627 | 33.551 | 33.759 | 33.706 |
| UNF 1 1/2" | 12 | 2.117 | 38.100 | 36.726 | 35.809 | 35.504 | 36.777 | 36.802 | 36.726 | 36.937 | 36.886 |

Tap Tolerances

Tolerance classes of taps and tolerance positions for screw threads as per ISO metric standard.

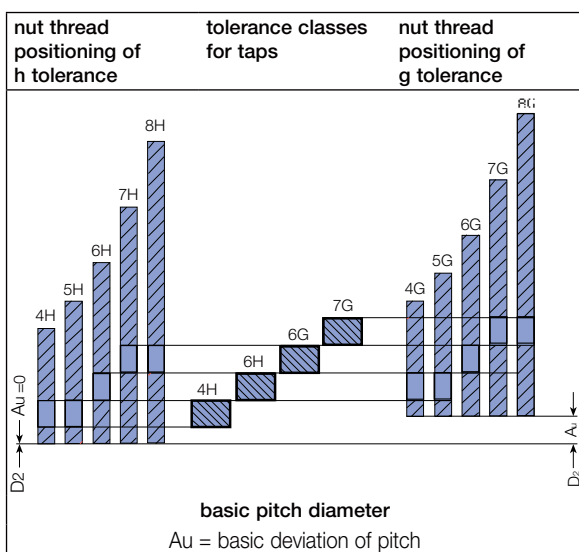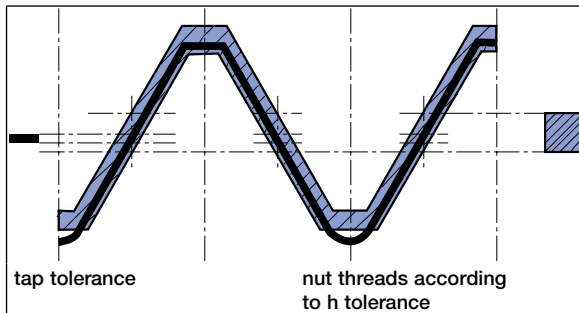

For Optimum Tapping Conditions, Reduced Machining Times and Increased Tap Life

Selection of the Most Suitable Tap

As a general rule, materials with deformation capability of at least 10% can be cold-formed. To decide on the most suitable tap, please refer to the tap recommendation table on page 57.

Pre-Tapping Holes

Check that the holes are within the prescribed size range depending on the application (see table on page 67). The holes should be clean and swarf-free.

Lubrication

Frequently the lubricant content of the coolant used for general machining is too low for tapping.

- If it is not possible to increase the lubricant content, following are some possible solutions:
- A separate lubricating unit can be connected to the machine control to deliver the required quantity of concentrated emulsion into the core hole or onto the tap. Tapping in separate operations allows the use of the ideal tapping lubricant.

Tapping Speeds


The tapping speed has a great influence on chip flow and the life of the tap. It is worthwhile to establish the ideal speed by tapping trials. For recommended initial values, see table on page 57. In addition, the following should be taken into consideration: characteristics of the material, machine and clamping method.

Effects of Unsuitable Tapping Speed

- forced tapping
- tap lead chipping caused by overloaded cutting tooth
- torn threads
- unsatisfactory tap life
- rejected threads

Chip Exclusion

Tap selection is also influenced by the type of hole being threaded. Through hole tapping usually requires a tap that pushes the chips out in front of the cutting edge and through the other end of the hole. A bottom hole tap must pull chips up and out of the hole.

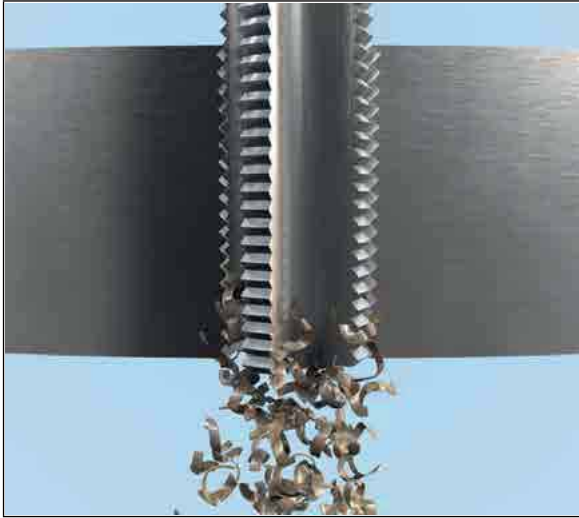

Tap Jamming

Some possible causes of tap jamming are:

- unsuitable tap
- tap with incorrect cutting geometry
- unsuitable coolant for material
- insufficient coolant
- axial pressure (pull or push) on the tap
- core hole too small
- breaks in walls of core hole
- speed too high or too low
- swarf trapped in the hole
- incorrect alignment of tap and core hole
- tap eccentricity

Results of Tap Jamming

- torn threads
- short tap life
- rejected threads
- tap breakage
- scrap workpieces

Tap Mounting

The tap must be mounted on the axis of the core hole. On non-synchronized machines (feed/speed) we recommend using a tapping spindle. (ISCAR GTI, GTIN collets, see pages 78-79)

Tapping Heads

As a rule, with non-synchronized machine spindles (feed/ speed), the feed rate should be programmed approximately 5-10% lower than the thread pitch. In these cases, a tapping chuck must be used which will compensate the difference between the feed rate and the thread pitch. It is important that the tension spring in the axial compensation is set to a minimum pressure to avoid axially loading the tap. The compression spring should be tensioned so the tap starts to cut by compressing the spring up to one-half pitch.

Important

Verify that the correct speed has been selected. Ensure that ample lubricating coolant is being used. Machine and equipment stability are essential for optimal performance and results.

Forming Taps

Forming taps (roll forming or cold forming) produce threads by deforming the material near the hole walls rather than by cutting the material. This method often works well in ductile materials. However, in brittle materials it often results in unsatisfactory threads.

Torque requirements for forming taps are considerably higher than for cutting taps. When forming taps are used, chuck capacity must be decreased by 25%. Forming taps do not produce chips.

Troubleshooting

| Problem | Cause | Solution |
|---|--|---|
| Tapped Hole Oversized | incorrect tap (cutting geometry unsuitable for application) | use tap selected from the relevant material group |
| | faulty alignment | ensure that the tap is correctly aligned with the core hole axis |
| | tap jamming | improve lubrication and direction of coolant adjust cutting speed |
| | incorrectly reground tap (lead tip is not concentric) | regrind tap |
| Stripped Threads | incorrect tap (cutting geometry incorrect for application) | use a tap from the relevant material group |
| | spindle speed and feed rate are not synchronized | Check feed rate programming and/or pitch of leading spindle. Use a tapping spindle with axial float (GTI/GTIN) |
| | insufficient starting pressure exerted on tap (causes peeling) | Increase starting pressure |
| Bell Mouthed Tapped Hole | incorrect starting pressure | use a tapping spindle with axial float (GTI/GTIN) |
| Unsatisfactory Thread Surface Finish | incorrect tap (cutting geometry unsuitable for application) | select tap for the relevant material group |
| | the tap is blunt | replace or regrind tap |
| | tap badly re-ground | regrind tap. check that cutting geometry is suitable for material |
| | incorrect lubricant, concentration or quantity | ensure the use of a suitable coolant and an ample supply |
| Partial Tap Chipping | swarf jamming | check cutting speed. use alternative tap |
| | tap has jammed against bottom of pre-hole | check hole and thread depths. drill a deeper pre-hole |
| | tap incorrectly reground (lead-in diameter too short, therefore too few cutting teeth) | ensure that correct dimensions are maintained when regrinding |
| | irregular workpiece material structure | adjust cutting speed. improve lubricant quality of coolant |
| Partial Tap Chipping | swarf jamming | check cutting speed. use alternative tap |
| | tap has jammed against bottom of pre-hole | check hole and thread depths. drill a deeper pre-hole |
| | tap incorrectly reground (lead-in diameter too short, therefore too few cutting teeth) | ensure that correct dimensions are maintained when regrinding |
| | irregular workpiece material structure | adjust cutting speed. improve lubricant quality of coolant |
| Excessive Tap Wear | incorrect cutting speed | adjust cutting speed to suit workpiece material |
| | coolant lacking in lubricating qualities and/or quantity | ensure the use of a suitable coolant and an ample supply. check that the coolant is reaching the cutting zone |
| | surface of the pre-hole is compacted | check pre-hole drilling conditions (drill carefully to reduce risk of surface compacting). check drill cutting edges |
| Tap Breakage | incorrect tap in use (cutting geometry unsuitable for application) | use tap from the relevant material group |
| | centering error | ensure that axes of tap and pre-hole are aligned |
| | blunt tap | regrind tap |
| | tap has reached bottom of pre-hole | use tapping spindle with axial float and slipping clutch (GTI/GTIN) |
| | pre-hole too small | check for correct pre-hole size, see pages 67-68 |

GTI / GTIN - Tapping Attachment

Compact tapping collet with tension and compression floating mechanism for ER32 collet chucks. A tapping collet for standard and rigid tapping operations. The **GTIN** ER32 collet makes tap removal and replacement easy, quick and reliable. Designed for stationary and rotating applications, the **GTIN** ER32 collets are economical and efficient due to the ability to use existing ER32 collet chucks (with various shank sizes and types).

Applications

The **GTIN** ER32 tapping collet is designed especially for CNC mill/turn centers, for regular and rigid tapping.

Advantages

- Quick tap change with a front clamping nut.
- Compact design for minimal clearance between the turret and chuck.
- Fits every type of stationary and rotating ER32 collet chuck.
- Positive tap drive with internal square driver.
- Compensates for machine feed and tap pitch variance, resulting in greater thread accuracy.
- Floating mechanism compensates for misalignment between tap and workpiece.
- High accuracy due to tension and compression mechanism.
- Available for all tap shank standards (DIN, ISO, AN SI, JIS).
- Tapping range M1-M16 (#0 to 5/8").
- Saves setup time by quick tap changing without removing **GTIN** from the machine.
- Optimal for machines which have limited space between the turret and workpiece.




GTI / GTIN - Tapping Attachment




Operation

For through- and blind-hole tapping:


- 1 Enter feed rate according to thread pitch (or 1-2 % lower). Set spindle to starting point with 0.08 mm clearance.

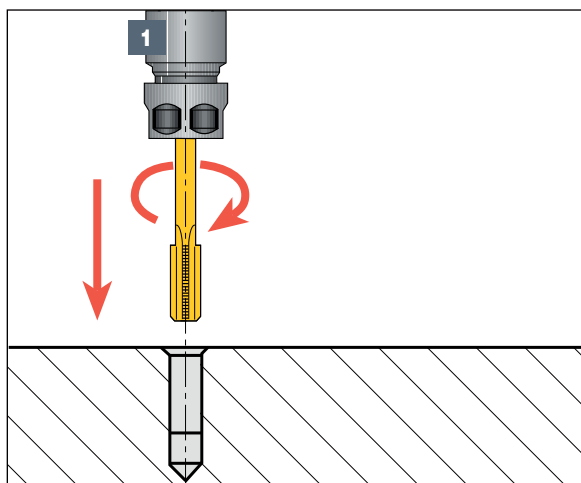

- 2 Start spindle forward with right hand rotation until reaching desired depth.

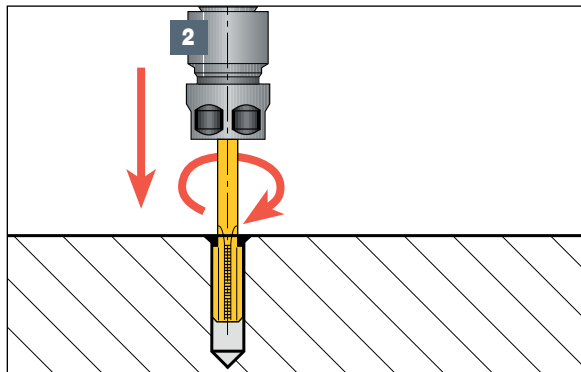

- 3 Stop feed and rotation and reverse to starting point.

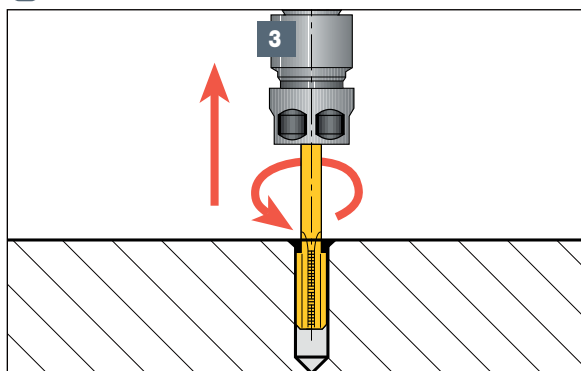

Description

Short tap chucks for ER collets.

Application


Axial Float/tension/compression Type for CNC Milling Machines and Lathes with Reversing Motors and Rigid Tapping.

Features

- Compensates for machine feed and tap pitch variance.
- Floating mechanism compensates for misalignment between tap and workpiece.
- Right- and left-hand tapping.

Advantages

- Practical and efficient tap holding by the ER spring collet without using jaw drive.
- Compact design for minimal clearance applications.
- Heavy duty design for high torque drive ensures the same accuracy as the tap itself.

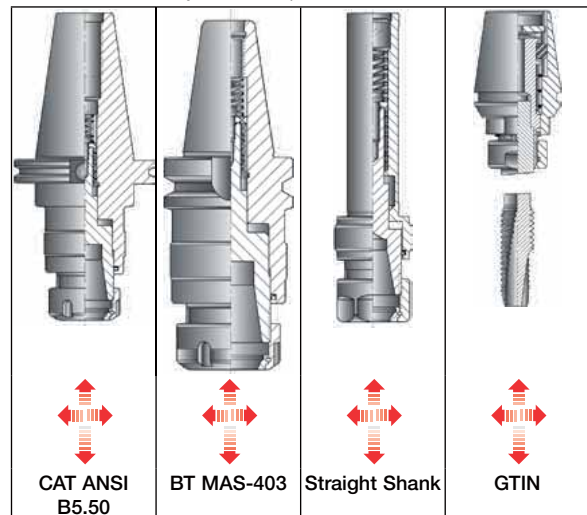


Milling



Indexable Milling Inserts

HELIALU

HSM90S APCR 1405
Super Positive Inserts
with a Polished Rake for
Machining Aluminum at
High Rotation Speed

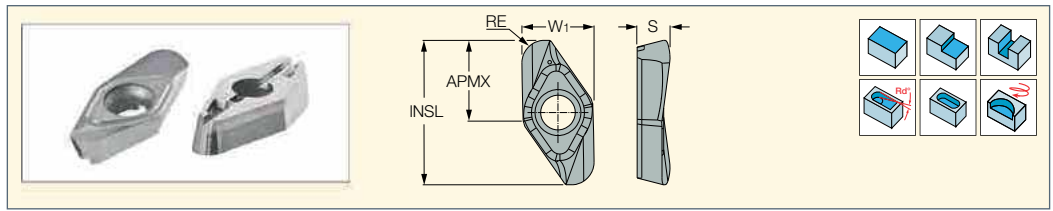


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|--------------------------------------|------------|-------------------|-------|-------|------|--------------|------|----------------------------|--------------------------|
| | W1 | RE ⁽²⁾ | APMX | INSL | S | IC28 | IC08 | a _p (mm) | f _z (mm/t) |
| | | | | | | ● | ● | | |
| HSM90S APCR 140508R-P | 12.50 | 0.80 | 13.50 | 25.00 | 6.05 | ● | ● | 1.20-13.50 | 0.10-0.30 |
| HSM90S APCR 140516R-P | 12.50 | 1.60 | 13.50 | 25.00 | 6.00 | ● | ● | 2.40-13.50 | 0.10-0.30 |
| HSM90S APCR 140520R-P | 12.50 | 2.00 | 13.50 | 25.00 | 5.95 | ● | ● | 3.39-13.50 | 0.10-0.30 |
| HSM90S APCR 140530R-P | 12.50 | 3.00 | 13.50 | 25.00 | 5.85 | ● | ● | 3.40-13.50 | 0.10-0.30 |
| HSM90S APCR 140532R-P | 12.50 | 3.20 | 13.50 | 25.00 | 5.80 | ● | ● | 3.60-13.50 | 0.10-0.30 |
| HSM90S APCR 140540R-P | 12.50 | 4.00 | 13.50 | 25.00 | 5.70 | ● | ● | 4.40-13.50 | 0.10-0.30 |
| HSM90S APCR 140550R-P ⁽¹⁾ | 12.50 | 5.00 | 13.50 | 25.00 | 5.50 | ● | ● | 5.40-13.50 | 0.10-0.30 |
| HSM90S APCR 140564R-P ⁽¹⁾ | 12.50 | 6.40 | 11.00 | 25.00 | 5.50 | ● | ● | 6.80-11.00 | 0.10-0.30 |

- When machining at very high cutting speed and replacing the insert, it is also recommended to replace the screw
- ⁽¹⁾ Tool's pocket should be modified by rounding its corners to R=2.5 mm
- ⁽²⁾ Measured on the cutter

HELIALU

HSM90S APCR 2207
Super Positive Inserts
with a Polished Rake for
Machining Aluminum at
High Rotational Speed

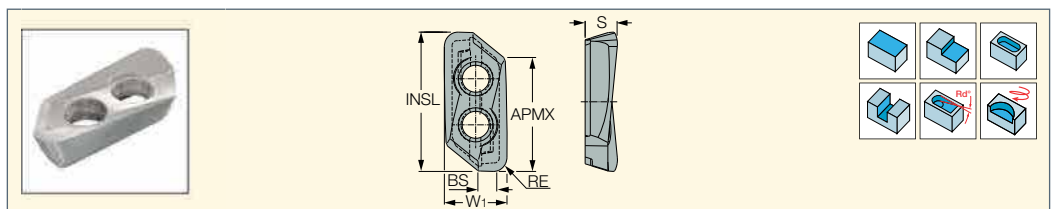


| Designation | Dimensions | | | | | | IC08 | Recommended Machining Data | |
|-----------------------|------------|-------------------|-------|------|-------|------|------|----------------------------|--------------------------|
| | W1 | RE ⁽¹⁾ | APMX | BS | INSL | S | | a _p (mm) | f _z (mm/t) |
| | | | | | | | | | |
| HSM90S APCR 220708R-P | 13.10 | 0.80 | 22.00 | 5.00 | 29.20 | 6.90 | ● | 1.20-22.00 | 0.15-0.30 |
| HSM90S APCR 220716R-P | 13.10 | 1.60 | 22.00 | 4.20 | 29.10 | 6.90 | ● | 2.00-22.00 | 0.15-0.30 |
| HSM90S APCR 220720R-P | 13.10 | 2.00 | 22.00 | 3.90 | 29.10 | 6.80 | ● | 2.40-22.00 | 0.15-0.30 |
| HSM90S APCR 220730R-P | 13.10 | 3.00 | 22.00 | 2.90 | 29.00 | 6.70 | ● | 3.40-22.00 | 0.15-0.30 |
| HSM90S APCR 220732R-P | 13.10 | 3.20 | 22.00 | 2.70 | 29.00 | 6.70 | ● | 3.60-22.00 | 0.15-0.30 |
| HSM90S APCR 220740R-P | 13.10 | 4.00 | 22.00 | 1.90 | 29.00 | 6.60 | ● | 4.40-22.00 | 0.15-0.30 |
| HSM90S APCR 220750R-P | 13.10 | 5.00 | 22.00 | 0.90 | 28.90 | 6.50 | ● | 5.40-22.00 | 0.15-0.30 |

- When machining at very high cutting speed it is recommended to replace the screw when replacing the insert
- ⁽¹⁾ Measured on the cutter





HM90 AXCR 1505
Super Positive Inserts
with a Polished Rake for
Machining Aluminum

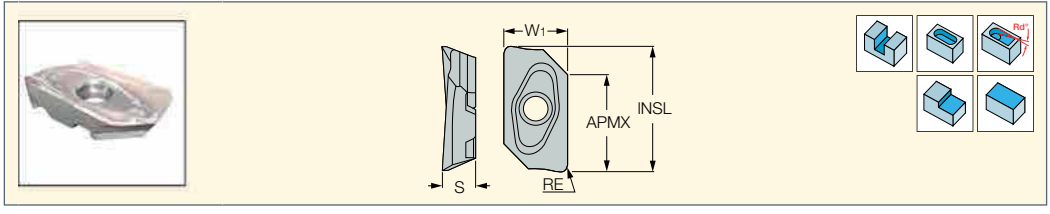


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|---------------------|------------|------|-------|-------|------|--------------|------|----------------------------|-----------------|
| | W1 | S | APMX | INSL | RE | IC28 | IC08 | a_p (mm) | f_z (mm/t) |
| HM90 AXCR 150502R-P | 10.00 | 5.00 | 14.00 | 19.20 | 0.20 | ● | ● | 0.60-14.00 | 0.10-0.20 |
| HM90 AXCR 150504R-P | 10.00 | 5.00 | 14.00 | 19.20 | 0.40 | ● | ● | 0.80-14.00 | 0.10-0.20 |
| HM90 AXCR 150508R-P | 10.00 | 5.00 | 14.00 | 19.20 | 0.80 | ● | ● | 1.20-14.00 | 0.10-0.20 |
| HM90 AXCR 150520R-P | 10.00 | 5.00 | 14.00 | 19.20 | 2.00 | ● | ● | 2.40-14.00 | 0.10-0.20 |
| HM90 AXCR 150525R-P | 10.00 | 5.00 | 14.00 | 19.20 | 2.50 | ● | ● | 2.90-14.00 | 0.10-0.20 |
| HM90 AXCR 150530R-P | 10.00 | 5.00 | 14.00 | 19.20 | 3.00 | ● | ● | 3.40-14.00 | 0.10-0.20 |
| HM90 AXCR 150532R-P | 10.00 | 5.00 | 14.00 | 19.20 | 3.20 | ● | ● | 3.60-14.00 | 0.10-0.20 |
| HM90 AXCR 150540R-P | 10.00 | 5.00 | 14.00 | 19.20 | 4.00 | ● | ● | 4.40-14.00 | 0.10-0.20 |

• Note: It is recommended to use the insert and screw set when machining at very high cutting speed



HM90 APCR 1605..R-P
Super Positive Inserts
with a Polished Rake for
Machining Aluminum

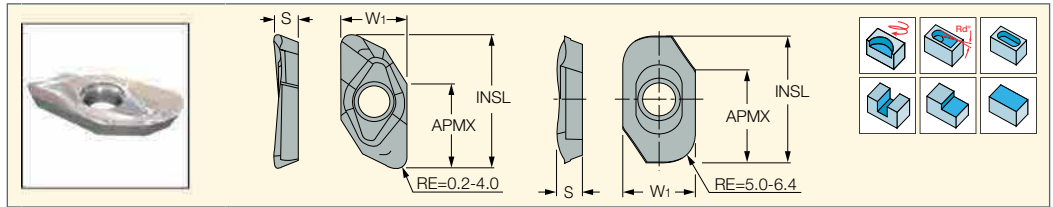

| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|------------------------------------|------------|-------------------|-------|-------|------|--------------|------|----------------------------|--------------------------|
| | W1 | RE ⁽²⁾ | APMX | INSL | S | IC28 | IC08 | a _p (mm) | f _z (mm/t) |
| HM90 APCR 160502R-P | 12.80 | 0.20 | 15.50 | 25.50 | 4.80 | ● | ● | 0.60-15.50 | 0.15-0.25 |
| HM90 APCR 160504R-P | 12.80 | 0.40 | 15.50 | 25.50 | 4.80 | ● | ● | 0.80-15.50 | 0.15-0.25 |
| HM90 APCR 160505R-P | 12.80 | 0.50 | 15.50 | 25.50 | 4.80 | ● | ● | 0.90-15.50 | 0.15-0.25 |
| HM90 APCR 160508R-P | 12.80 | 0.80 | 15.50 | 25.50 | 4.80 | ● | ● | 1.20-15.50 | 0.15-0.25 |
| HM90 APCR 160516R-P | 12.80 | 1.60 | 15.50 | 25.50 | 4.80 | ● | ● | 2.00-15.50 | 0.15-0.25 |
| HM90 APCR 160520R-P | 12.80 | 2.00 | 15.50 | 25.40 | 4.80 | ● | ● | 2.40-15.50 | 0.15-0.25 |
| HM90 APCR 160525R-P | 12.80 | 2.50 | 15.50 | 25.40 | 4.80 | ● | ● | 2.90-15.50 | 0.15-0.25 |
| HM90 APCR 160530R-P | 12.80 | 3.00 | 15.50 | 24.40 | 4.80 | ● | ● | 3.40-15.50 | 0.15-0.25 |
| HM90 APCR 160532R-P | 12.80 | 3.20 | 15.50 | 24.40 | 4.80 | ● | ● | 3.60-15.50 | 0.15-0.25 |
| HM90 APCR 160540R-P | 12.80 | 4.00 | 15.50 | 23.40 | 4.80 | ● | ● | 4.40-15.50 | 0.15-0.25 |
| HM90 APCR 160550R-P ⁽¹⁾ | 12.70 | 5.00 | 16.00 | 22.70 | 4.80 | ● | ● | 5.40-16.00 | 0.15-0.25 |
| HM90 APCR 160560R-P ⁽¹⁾ | 12.70 | 6.00 | 16.00 | 22.70 | 4.80 | ● | ● | 6.40-16.00 | 0.15-0.25 |
| HM90 APCR 160564R-P ⁽¹⁾ | 12.70 | 6.40 | 16.00 | 22.70 | 4.80 | ● | ● | 6.80-16.00 | 0.15-0.25 |

- It is recommended to use the insert and screw set when machining at very high cutting speeds
- ⁽¹⁾ Use with HM90 16BR tools only
- ⁽²⁾ Measured on the cutter

Insert and Screw Set (5+5) for High Speed Machining Applications

In order to maintain high machining reliability, we strongly recommend that when replacing the worn out insert, the clamping screw is replaced as well. Available are packages that contain 5 **HM90 APCR 1605..R-P IC28** or **HM90 AXCR 1505..R-P IC28** inserts and 5 matching screws.

These packages contain inserts with a weight tolerance of 0.02 gm. This tight tolerance ensures the dynamic balance of the tool is maintained after insert indexing.



HM90 SET APCR-P

| Set Designation | 5 Included Inserts | 5 Included Screws |
|------------------------------|--------------------------|-------------------|
| HSM90 Set APCR 160502RP IC28 | HM90 APCR 160502R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160504RP IC28 | HM90 APCR 160504R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160508RP IC28 | HM90 APCR 160508R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160516RP IC28 | HM90 APCR 160516R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160520RP IC28 | HM90 APCR 160520R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160525RP IC28 | HM90 APCR 160525R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160532RP IC28 | HM90 APCR 160532R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160540RP IC28 | HM90 APCR 160540R-P IC28 | SR 14-0180 |
| HSM90 Set APCR 160564RP IC28 | HM90 APCR 160564R-P IC28 | SR 14-0180 |

HM90 SET AXCR-P


| Set Designation | 5 Included Inserts | 5 Included Screws |
|------------------------------|--------------------------|-------------------|
| HSM90 Set AXCR 150504RP IC28 | HM90 AXCR 150504R-P IC28 | SR 14-562 |
| HSM90 Set AXCR 150520RP IC28 | HM90 AXCR 150520R-P IC28 | SR 14-562 |





HM90 APCR 2206..R-P

Super Positive Inserts with a Polished Rake for Machining Aluminum

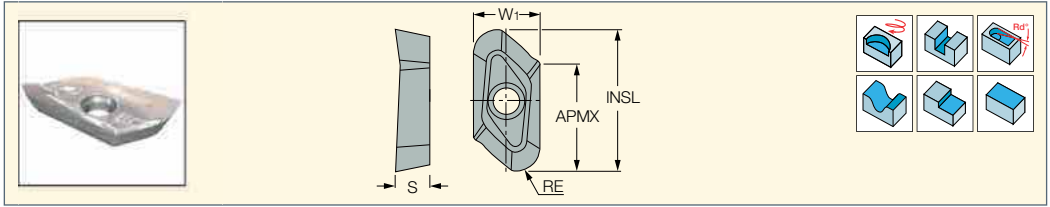


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|---------------------|------------|------|-------|-------|------|--------------|------|----------------------------|-----------|
| | W1 | RE | APMX | INSL | S | IC28 | IC08 | ap (mm) | fz (mm/t) |
| HM90 APCR 220605R-P | 13.90 | 0.50 | 22.00 | 30.50 | 6.90 | ● | ● | 0.90-22.00 | 0.07-0.30 |
| HM90 APCR 220608R-P | 13.72 | 0.80 | 22.00 | 29.70 | 6.90 | ● | ● | 1.20-22.00 | 0.07-0.30 |
| HM90 APCR 220616R-P | 13.72 | 1.60 | 22.00 | 29.70 | 6.90 | ● | ● | 2.00-22.00 | 0.07-0.30 |
| HM90 APCR 220620R-P | 13.72 | 2.00 | 22.00 | 29.70 | 6.60 | ● | ● | 2.40-22.00 | 0.07-0.30 |
| HM90 APCR 220623R-P | 13.72 | 2.30 | 22.00 | 29.70 | 6.60 | ● | ● | 2.70-22.00 | 0.07-0.30 |
| HM90 APCR 220632R-P | 13.72 | 3.20 | 22.00 | 29.40 | 6.60 | ● | ● | 3.60-22.00 | 0.07-0.30 |
| HM90 APCR 220640R-P | 13.72 | 4.00 | 22.00 | 29.00 | 6.60 | ● | ● | 4.40-22.00 | 0.07-0.30 |
| HM90 APCR 220650R-P | 13.72 | 5.00 | 22.00 | 28.20 | 6.10 | ● | ● | 5.40-22.00 | 0.07-0.30 |
| HM90 APCR 220664R-P | 13.72 | 6.40 | 22.00 | 26.80 | 6.00 | ● | ● | 6.80-22.00 | 0.07-0.30 |



HM390 TDCR 1505

Triangular Inserts with 3 Helical Cutting Edges for 90° Shoulder Accuracy

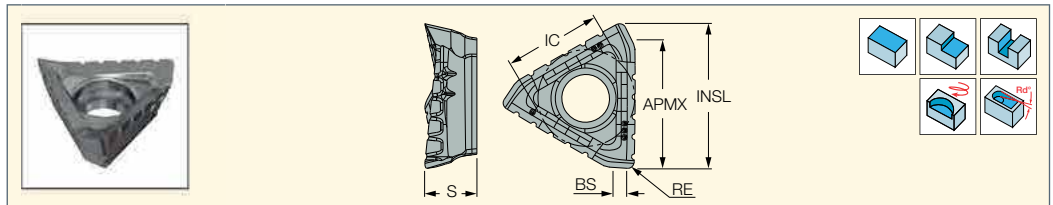

| Designation | Dimensions | | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|-----------------------------|------------|-------|------|-------|------|------|--------------|-----|----------------------------|-----------|
| | INSL | IC | S | APMX | RE | BS | IC28 | IC4 | ap (mm) | fz (mm/t) |
| HM390 TDCR 150502PDFR-P | 16.80 | 11.40 | 6.00 | 13.00 | 0.20 | 2.40 | ● | | 0.60-13.00 | 0.08-0.20 |
| HM390 TDCR 150504PDFR-P | 16.80 | 11.40 | 6.00 | 13.00 | 0.40 | 2.35 | ● | | 0.80-13.00 | 0.08-0.20 |
| HM390 TDCR 1505PDFR-P | 16.70 | 11.40 | 6.00 | 13.00 | 0.80 | 1.60 | ● | ● | 1.20-13.00 | 0.08-0.20 |
| HM390 TDCR 150520PDFR-P | 16.00 | 11.40 | 6.00 | 13.00 | 2.00 | 1.00 | ● | | 2.40-13.00 | 0.08-0.20 |
| HM390 TDCR 150532PDFR-P (1) | 15.00 | 11.40 | 6.00 | 13.00 | 3.20 | 0.50 | ● | | 3.60-13.00 | 0.08-0.20 |
| HM390 TDCR 150540PDFR-P (1) | 14.00 | 11.40 | 6.00 | 13.00 | 4.00 | 0.70 | ● | | 4.40-13.00 | 0.08-0.20 |
| HM390 TDCR 150508 FW-P (2) | 17.10 | 11.40 | 6.40 | 13.00 | 0.80 | 2.30 | ● | | 1.20-13.00 | 0.08-0.22 |
| HM390 TDCR 150532 FW-P (3) | 17.10 | 11.40 | 6.40 | 13.00 | 3.20 | 0.50 | ● | | 3.60-13.00 | 0.08-0.22 |

- Peripherally ground flank, super positive polished rake formilling aluminum, titanium and magnesium
- (1) Tools should be modified by rounding the insert pocket corners to 2.0 mm
- (2) Insert with serrated cutting edge
- (3) Tools should be modified by rounding the insert pocket corners to 2.0 mm Insert with serrated cutting edge

Table - Average Cutting Data for HM390 TDCR 1505... FW-P Inserts

| ISO Class DIN/ISO 513 | Workpiece Material | | | | | | Carbide Grade | Cutting Speed Vc [m/min] | Max. D.O.C. Ap [mm] | Feed Fz [mm/tooth] | Coolant |
|--------------------------|--------------------|--------------------------------|---------------------|-------------|------------------------|---------------|---------------|-----------------------------|------------------------|-----------------------|---------|
| | Material No. | Material | Condition | Hardness HB | Typical Representative | | | | | | |
| | | | | | AISI/SAE/ASTM | DIN W.-Nr. | | | | | |
| N | 21 | aluminum-wrought alloys | not hardenable | 60 HB | 1000 | 3.0255 | IC28 | 13 | 0.08-0.22 | wet | |
| | 22 | | hardenable | 100 HB | 7050 | 3.4345 | | | | | |
| | 23 | Aluminum-cast, alloyed <12% Si | not hardenable | 75 HB | A360.2 | 3.2383 | | | | | |
| | 24 | Aluminum-cast, alloyed | hardenable | 90 HB | 4218B | 3.2371 | | | | | |
| | 25 | Aluminum-cast, alloyed >12% Si | high temperature | 130 HB | A390.0 | EN AB-48100** | | | | | |
| | 26 | Copper alloys >1% Pb | free cutting | 110 HB | C 93800 | 2.1182 | | | | | |
| | 27 | | brass | 90 HB | C 86500 | 2.0592 | | | | | |
| | 28 | Copper alloys | electrolytic copper | 100 HB | C 63000 | 2.0966 | | | | | |

* ISCAR material group in accordance with VDI 3323 standard


** Euro norm

For machining in unstable conditions, the recommended cutting data should be reduced by 20-30%



T490 LNAR-P

Tangentially Clamped
Precision Ground Inserts
with a Super Positive Rake
for Machining Aluminum

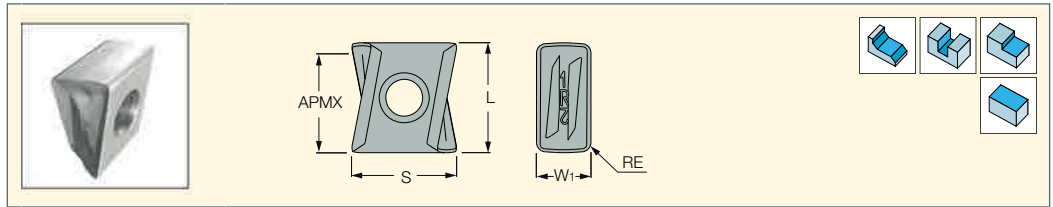

| Designation | Dimensions | | | | | IC07 | Recommended Machining Data | |
|---------------------------------------|------------|-------|-------|------|-------|------|----------------------------|--------------------------|
| | W1 | L | APMX | RE | S | | a _p (mm) | f _z (mm/t) |
| T490 LNAR 0804PN-R-P | 4.25 | 8.60 | 8.00 | 0.40 | 7.50 | ● | 1.00-5.00 | 0.08-0.15 |
| T490 LNAR 1306PN-R-P | 6.65 | 13.81 | 12.50 | 0.80 | 13.00 | ● | 4.00-12.00 | 0.08-0.20 |
| T490 LNAR 1306PNR-P-RD ⁽¹⁾ | 6.65 | 13.75 | 12.50 | 0.80 | 13.05 | ● | 4.00-12.00 | 0.10-0.20 |
| T490 LNAR 1607PN-R-P | 7.05 | 17.05 | 16.00 | 0.80 | 15.90 | ● | 5.00-14.00 | 0.15-0.25 |


- For T490 ELN-13 on diameter 25 mm at a_p=5, f_z=0.15 at a_p=10, f_z=0.1
- ⁽¹⁾ Used for ramping down applications on aluminum with 32 mm and larger tools, see table below

T490 LNAR 1306PNR-P-RD

| Tool Diameter | a - Rampdown |
|---------------|--------------|
| 32 | 2.8° |
| 40 | 2.0° |
| 50 | 1.5° |
| 63 | 1.1° |
| 80 | 0.9° |
| 100 | 0.7° |

LNAR 1106

Tangentially Clamped Inserts
with Positive Polished Rake

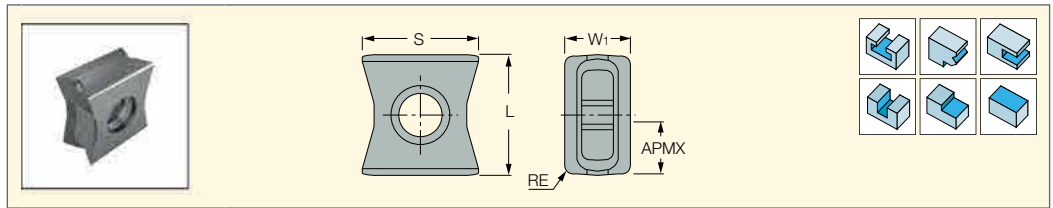


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|------------------|------------|-------|-------|------|---------------------|--------------|-------|----------------------------|--------------------------|
| | W1 | L | S | RE | APMX ⁽¹⁾ | IC07 | IC907 | a _p (mm) | f _z (mm/t) |
| LNAR 1106 PN-N | 6.00 | 11.16 | 10.72 | 0.50 | 5.00 | ● | ● | 1.50-5.00 | 0.15-0.20 |
| LNAR 1106 PN-N-P | 6.00 | 11.16 | 10.72 | 0.50 | 5.00 | ● | ● | 1.50-5.00 | 0.15-0.20 |

- Polished rake and sharp cutting edge
- Recommended for machining high silicon and cast aluminum, titanium and magnesium
- 4 R.H. and 4 L.H. cutting edges
- ⁽¹⁾ D.O.C. when the insert is on the cutter
- First choice grade





LNAR 1106 (PCD)
Tangentially Clamped Milling Inserts with a Brazed PCD Tip for Machining Aluminum

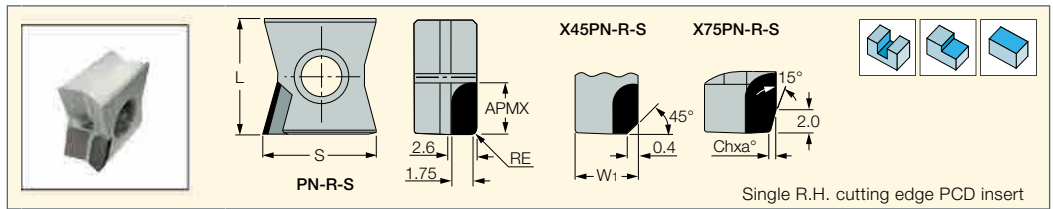

Single R.H. cutting edge PCD insert

| Designation | Dimensions | | | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|----------------------|------------|-------|-------|------|------|----|------|--------------|-----|----------------------------|-----------|
| | W1 | L | S | RE | Ch | a° | APMX | ID8 | ID5 | ap (mm) | fz (mm/t) |
| LNAR 110604PN-R-S | 6.00 | 11.11 | 10.76 | 0.40 | - | 90 | 5.00 | ● | ● | 0.10-2.00 | 0.10-0.25 |
| LNAR 110604X45PN-R-S | 6.00 | 11.11 | 10.70 | - | 0.4 | 45 | 5.00 | ● | ● | 0.10-2.00 | 0.10-0.25 |
| LNAR 110620X75PN-R-S | 6.00 | 11.11 | 10.72 | - | 0.15 | 75 | 5.00 | ● | ● | 0.10-2.00 | 0.10-0.25 |


- The chamfered corner used for reduced chipping on the machined component edges
- Use ID5 for aluminum alloys with <12% silicon
- Use ID8 for aluminum alloys with >12% silicon
- The inserts are supplied with spare screws

PCD
Recommended Machining Conditions

| ISO | Grade | DOC mm | Material | Vc N/mm | Fee mm/tooth | Cutting Edge |
|-----|-------|--------|--------------------------------------|-----------|--------------|--------------|
| N | ID5 | <2.0 | Aluminum-wrought alloys <12% silicon | 300-3000 | 0.05-0.25 | Sharp |
| | | <2.0 | Chipboard Fiberboard Plastics | 2000-3000 | 0.05-0.25 | |
| | | <2.0 | Copper Brass alloys | 500-1500 | 0.05-0.25 | |
| | ID8 | <2.0 | Aluminum >12% silicon | 250-1000 | 0.05-0.25 | |
| | | <2.0 | Aluminum <12% silicon | 300-3000 | 0.05-0.25 | |
| | | <2.0 | Chipboard Fiberboard Plastics MMC | 200-600 | 0.05-0.25 | |




LNAR 1106PN-R-S-W (PCD)
Tangentially Clamped Wiper Milling Inserts with a Brazed PCD Tip for Machining Aluminum

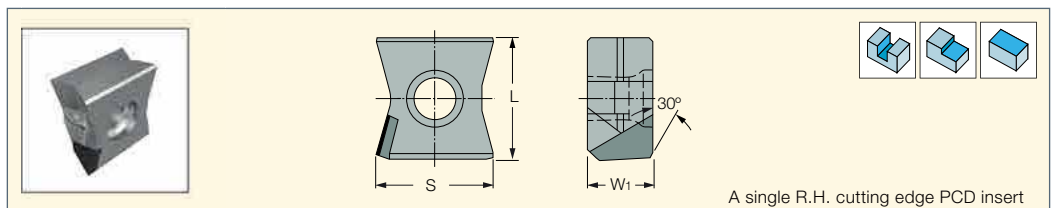

A single R.H. cutting edge PCD insert



| Designation | Dimensions | | | ID5 | Recommended Machining Data |
|-------------------|------------|-------|-------|-----|----------------------------|
| | W1 | L | S | | fz (mm/t) |
| LNAR 1106PN-R-S-W | 5.98 | 11.26 | 10.75 | ● | 0.10-0.25 |

- The chamfered corner is used for reduced chipping on the machined component edges
- The wiper insert should not be used with LNAR 110620x75PN-R-S inserts
- For D.O.C., cutting speed recommendations and grade data, see page 86

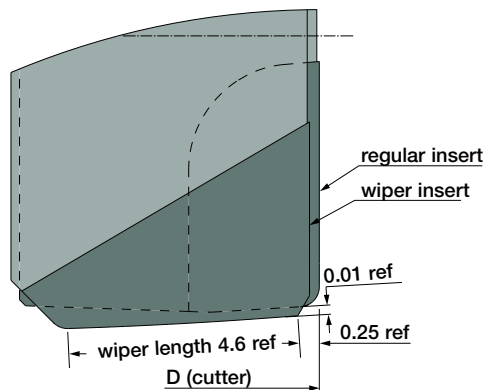

LNAR 1506

Tangentially Clamped Insert with a Positive Polished Land and Sharp Cutting Edge


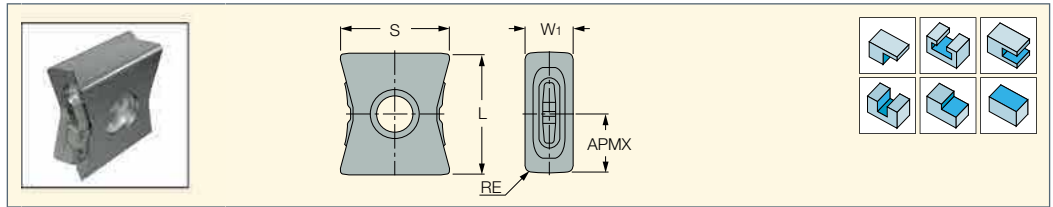


| Designation | Dimensions | | | | | IC07 | Recommended Machining Data | |
|-------------------------|------------|-------|-------|------|------|------|----------------------------|--------------|
| | W1 | L | S | RE | APMX | | a_p (mm) | f_z (mm/t) |
| LNAR 1506 PN-N-P | 6.00 | 15.00 | 13.56 | 0.80 | 7.00 | ● | 2.00-7.00 | 0.10-0.15 |

- Note: Do not use this insert on F86LNx tools
- Recommended for machining high silicon aluminum, titanium and magnesium
- 4 R.H. and 4 L.H. cutting edges when used on F90LN cutters

LNAR 1506 PN-R-S (PCD)

Tangentially Clamped Insert with a Brazed PCD Tip for Machining Aluminum

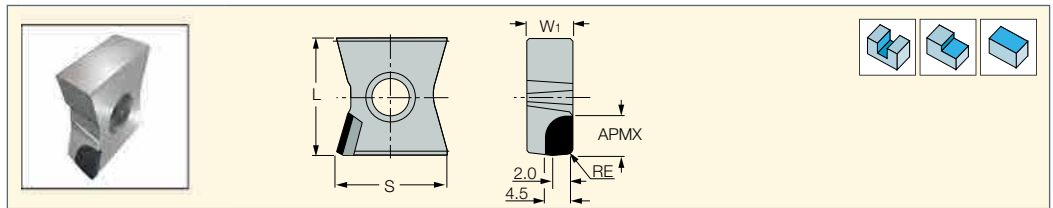


| Designation | Dimensions | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|--------------------------|------------|-------|-------|------|------|--------------|-----|----------------------------|--------------|
| | W1 | L | S | RE | APMX | ID8 | ID5 | a_p (mm) | f_z (mm/t) |
| LNAR 150604PN-R-S | 6.00 | 15.06 | 14.00 | 0.40 | 5.00 | ● | ● | 0.05-2.00 | 0.10-0.25 |

- The insert features a single R.H. cutting edge
- Use ID5 for aluminum alloys with less than 12% silicon and ID8 for aluminum alloys with more than 12% silicon
- The inserts are supplied with spare screws
- For D.O.C., cutting speed recommendations and grade data, see page 86

IQ845 SYHU-07

Square Inserts with 8 Cutting Edges

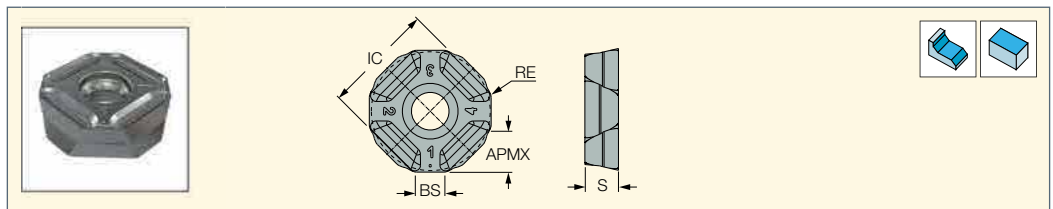


| Designation | Dimensions | | | | | IC28 | Recommended Machining Data | |
|-----------------------------|------------|------|------|-------|------|------|----------------------------|--------------|
| | APMX | BS | RE | IC | S | | a_p (mm) | f_z (mm/t) |
| IQ845 SYHU 0704ADN-P | 4.60 | 3.40 | 0.80 | 13.80 | 4.20 | ● | 1.00-4.00 | 0.10-0.25 |



HELIOCTO


OFCR/OFCT-AEN/AETN
 Octagonal Milling Inserts
 with Positive Rake and
 Sharp Cutting Edges

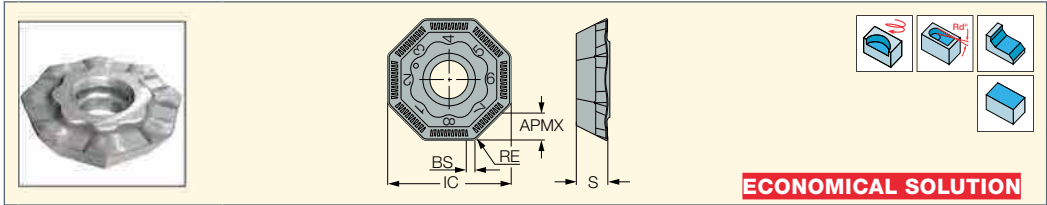

ECONOMICAL SOLUTION


| Designation | Dimensions | | | | | IC28 | Recommended Machining Data | |
|----------------------------|------------|------|------|------|------|------|----------------------------|--------------|
| | IC | APMX | BS | RE | S | | a_p (mm) | f_z (mm/t) |
| OFCR 07T3-AEN-P (1) | 17.80 | 4.60 | 1.60 | 0.60 | 4.35 | ● | 1.00-3.00 | 0.10-0.20 |

(1) Polished rake used for aluminum




HELIOCTO

OFCR/OFCT-RW/AER (wiper)
 Octagonal Milling Inserts with
 Four Wiper Cutting Edges

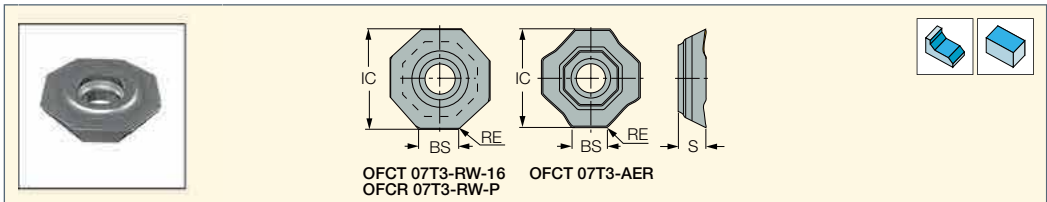


| Designation | Dimensions | | | | IC28 | Recommended Machining Data | |
|-----------------------|------------|------|------|------|------|----------------------------|--------------|
| | IC | BS | S | RE | | a_p (mm) | f_z (mm/t) |
| OFCR 07T3-RW-P | 18.45 | 6.80 | 4.58 | 0.60 | ● | 0.50-1.00 | 0.10-0.15 |

A single wiper insert mounted on the HOF D..R07 cutter does the required job. The wiper insert protrudes less than 0.1 mm axially. Wiper inserts have only 4 cutting edges. There are 4 marks engraved on the wiper inserts. Pay attention when mounting the insert in the pocket that the marked cutting edges are parallel to the bottom of the cutter (see sketch). Maximum depth of cut when using the wiper insert is 2.5 mm. It is recommended to use wiper inserts in $a_p=0.5-1.0$ mm to achieve the best results. The criterion for indexing the wiper insert should be the decreased quality of the surface finish. Recommended machining conditions for finishing operations: V_c (finishing)= V_c (roughing) x 1.25 m/min $f_z=0.10-0.15$ mm/t



HELIOCTO

OEMT/OEKT 060405
 Octagonal Milling Inserts
 for General Use

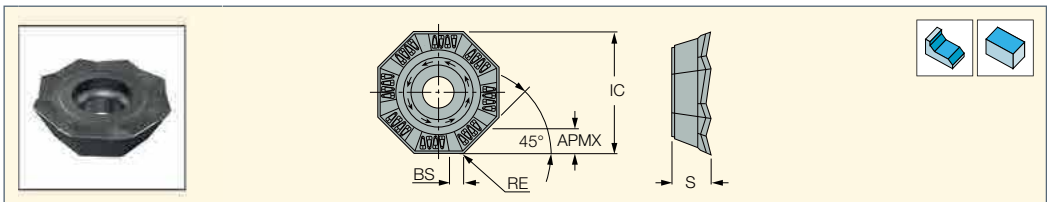


| Designation | Dimensions | | | | | IC28 | Recommended Machining Data | |
|--------------------------|------------|------|------|------|------|------|----------------------------|--------------|
| | IC | APMX | BS | RE | S | | a_p (mm) | f_z (mm/t) |
| OEMT 060405AER-76 | 14.27 | 2.50 | 1.60 | 0.50 | 4.74 | ● | 1.00-2.45 | 0.15-0.25 |



HELIOCTO

OECR

Octagonal Milling Inserts with Positive Rake and Sharp Cutting Edges

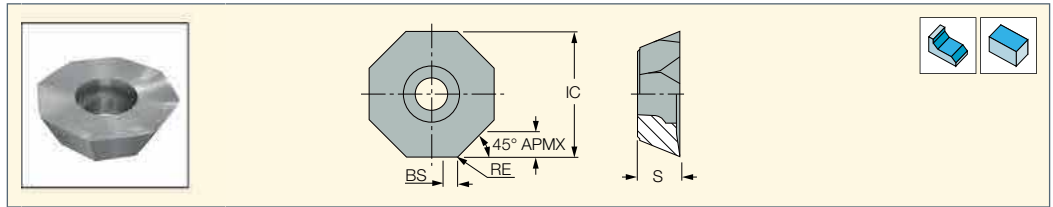

| Designation | Dimensions | | | | | | IC28 | Recommended Machining Data | |
|---------------------------------|------------|------|------|------|------|------------|-----------|----------------------------|--|
| | IC | APMX | BS | RE | S | a_p (mm) | | f_z (mm/t) | |
| OECR 060405AER-P ⁽¹⁾ | 14.45 | 3.70 | 1.60 | 0.50 | 4.90 | ● | 1.00-3.70 | 0.08-0.20 | |


⁽¹⁾ Polished rake used for aluminum

MILLSHRED

ROUND LINE

RCMT-FW

Fully Effective Serrated Inserts with Four Options for Indexing Orientation

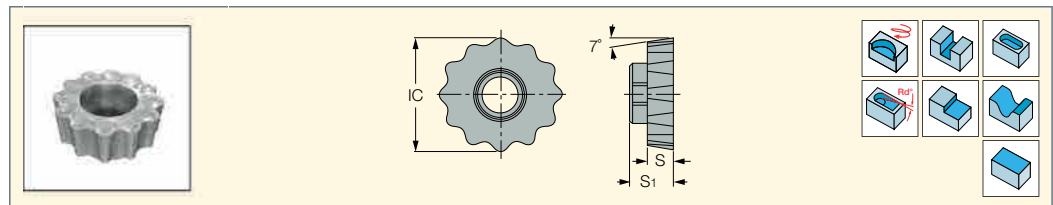

| Designation | Dimensions | | | Tough ↔ Hard | | | Recommended Machining Data | |
|---------------------------------|------------|------|------|--------------|-------|-------|----------------------------|--------------|
| | IC | S | S1 | IC890 | IC928 | IC908 | a_p (mm) | f_z (mm/t) |
| RCMT 1004-FW-F20 ⁽¹⁾ | 10.00 | 3.20 | 4.80 | ● | | | 2.00-4.00 | 0.15-0.30 |
| RCMT 1206-FW-F20 ⁽¹⁾ | 12.00 | 4.00 | 6.40 | | ● | ● | 2.50-5.00 | 0.20-0.35 |
| RCMT 1607-FW-F20 ⁽¹⁾ | 16.00 | 5.00 | 7.90 | | ● | ● | 3.00-6.00 | 0.20-0.35 |
| RCMT 2009-FW-F20 ⁽¹⁾ | 20.00 | 6.00 | 9.40 | | ● | | 4.00-8.00 | 0.20-0.35 |


⁽¹⁾ For aluminum

MILLSHRED

P290 LINE

P290 ACCT/KT

Single-Sided Rectangular Inserts with Two 12 and 18 mm Straight Cutting Edges

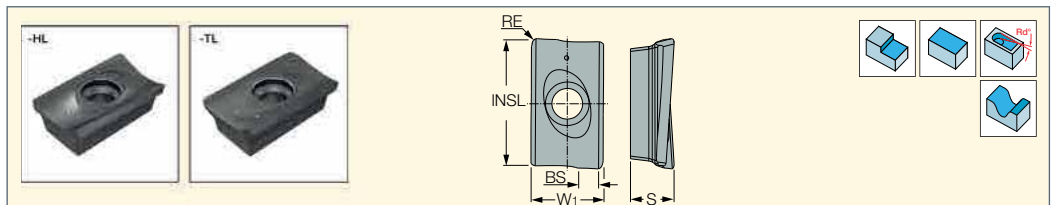

| Designation | Dimensions | | | | | | IC28 | Recommended Machining Data | |
|------------------------|------------|-------|------|------|------|------------|------------|----------------------------|--|
| | W1 | INSL | S | RE | BS | a_p (mm) | | f_z (mm/t) | |
| P290 ACCT 1806PDR-HL-P | 10.75 | 19.40 | 6.50 | 0.80 | 2.50 | ● | 5.00-18.00 | 0.08-0.12 | |


● HL-P - Polished rake, used for aluminum



MILLSHRED
P290 LINE

P290 ACKT

Single-Sided Rectangular Inserts with 2 Serrated Cutting Edges

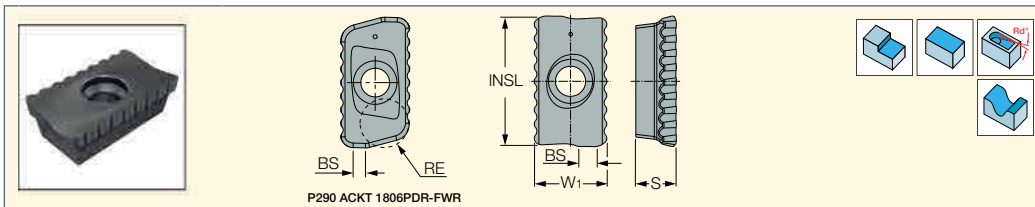


| Designation | Dimensions | | | | | | IC28 | Recommended Machining Data | |
|--|------------|-------|------|-------------------|------|---------------------|------------|----------------------------|--|
| | W1 | INSL | S | RE ⁽²⁾ | BS | a _p (mm) | | f _z (mm/t) | |
| P290 ACKT 1806PDR-FWE-P⁽¹⁾ | 10.70 | 18.50 | 6.00 | 1.20 | 2.00 | ● | 5.00-18.00 | 0.08-0.12 | |

⁽¹⁾ Polished rake, used for rough milling of aluminum
⁽²⁾ Radius for programming

MILL4FEED

FFQ4 SOMT 1205

Single-Sided Square Inserts with 4 Cutting Edges for Fast Feed Milling

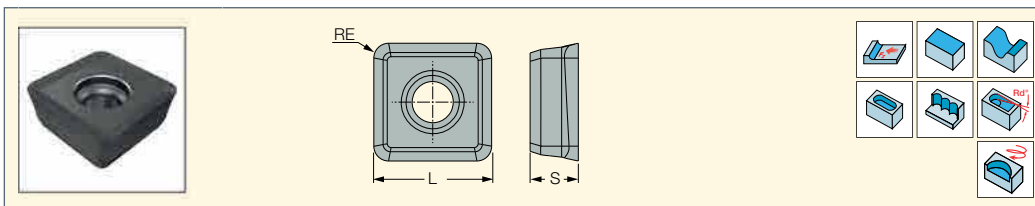

| Designation | Dimensions | | | | IC28 | Recommended Machining Data | |
|-----------------------------|------------|------|------|---------------------|-----------|----------------------------|--|
| | L | S | RE | a _p (mm) | | f _z (mm/t) | |
| FFQ4 SOMT 120516HP-P | 12.70 | 5.20 | 1.60 | ● | 0.50-1.50 | 0.40-1.80 | |


- For side plunging, the initial cutting feed is 0.1 mm/t
- HP-P - Positive rake face, used for aluminum

| ISO Class DIN/ISO 513 | Workpiece Material | | | | | Insert Type | Carbide Grade | D.O.C. a _p (mm) | | Cutting Spd v _c (m/min) | Feed f _z (mm/tooth) | | Coolant |
|--------------------------|----------------------------------|--------------------|-------------|-------------------|----------|-------------|---------------|----------------------------|---------|------------------------------------|--------------------------------|---------|---------|
| | Description | Material Group No. | Hardness HB | Typical Materials | | | | Recommended | Range | | Recommended | Range | |
| | | | | AISI/SAE/ASTM/AA | W.Nr/DIN | | | | | | | | |
| N | wrought and cast aluminum alloys | 21-24 | 60-100 | 7075 | 3.437 | HP-P | IC28 | 1.2 | 0.4-1.5 | 250-450 | 1.0 | 0.5-2.0 | Wet |

TANGPLUNGE
PLUNGING LINE


HTP LN.. 1006

Tangentially Clamped Inserts with 4 Cutting Edges for Plungers

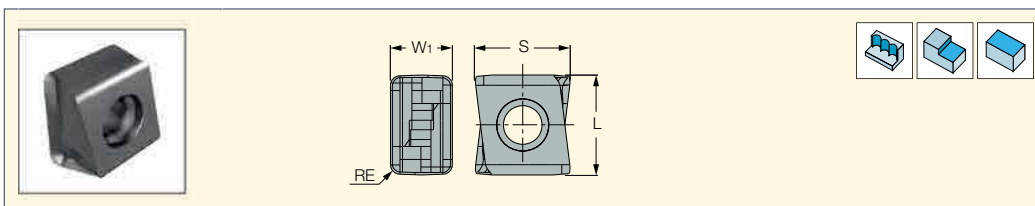


| Designation | Dimensions | | | | IC07 | Recommended Machining Data |
|---------------------------|------------|-------|-------|------|------|----------------------------|
| | W1 | L | S | RE | | f _z (mm/t) |
| HTP LNAR 1006 FR-P | 6.50 | 10.50 | 10.13 | 1.00 | ● | 0.05-0.15 |

- FR-P - For machining aluminum



HTP LN.. 0604

Tangentially Clamped Inserts with 4 Cutting Edges for Plungers

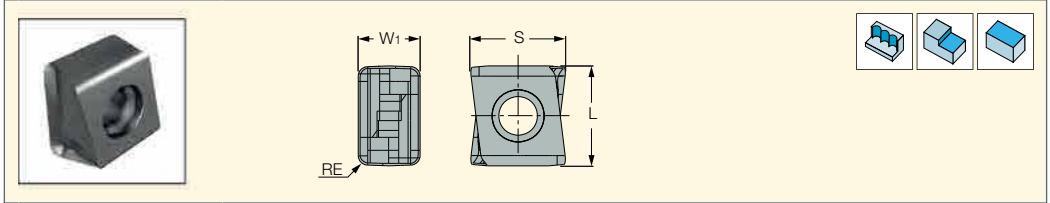


| Designation | Dimensions | | | | IC07 | Recommended Machining Data |
|---------------------------|------------|------|------|------|------|----------------------------|
| | W1 | L | S | RE | | f _z (mm/t) |
| HTP LNAR 0604 FR-P | 4.06 | 6.50 | 6.77 | 0.80 | ● | 0.05-0.15 |

- FR-P-For machining aluminum

HTP LN.. 1606

Tangentially Clamped Inserts with 4 Cutting Edges for Plungers

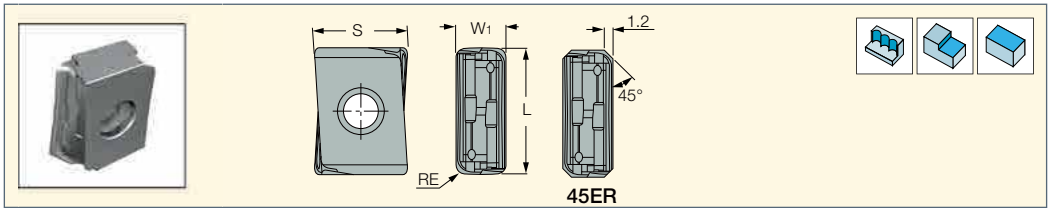


| Designation | Dimensions | | | | IC07 | Recommended Machining Data |
|---------------------------|------------|-------|-------|------|------|----------------------------|
| | W1 | L | S | RE | | f _z (mm/t) |
| HTP LNAR 1606 FR-P | 6.50 | 16.50 | 12.28 | 1.20 | ● | 0.05-0.15 |

- FR-P-For machining aluminum



Multi-Master - Solid Carbide Interchangeable Milling Heads

MULTI-MASTER and FLEXFIT Connection Options

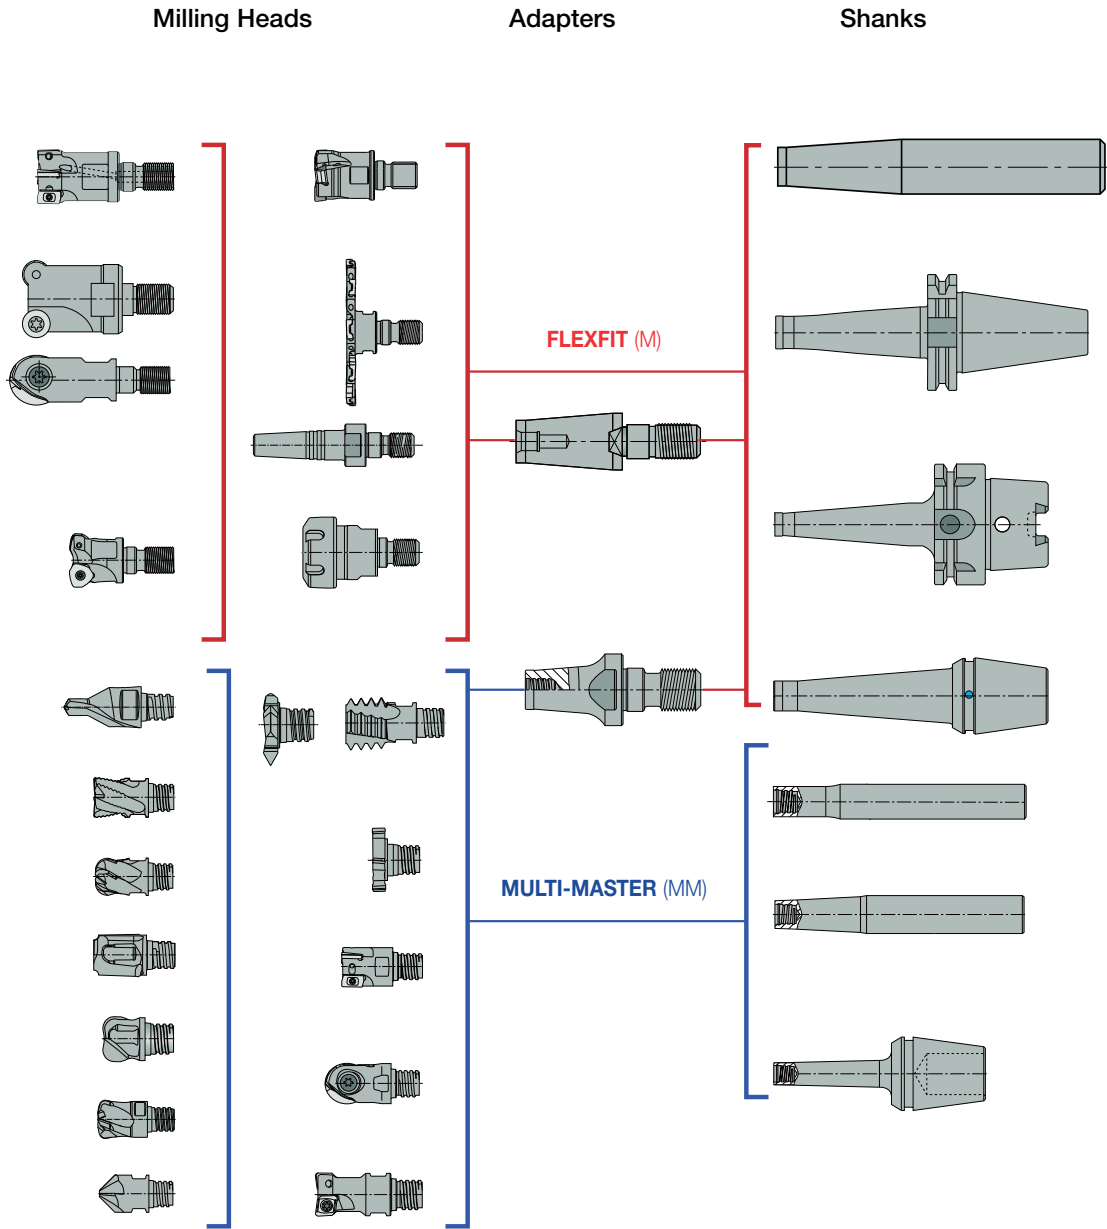


Features

Modular system reduces stock cost by using the same head with different shank options. Enables machining with larger overhangs. Same head can be mounted on metric and inch combinations.

MM EA-CF

Interchangeable Solid Carbide Endmill Heads with Different Helix for Machining Aluminum

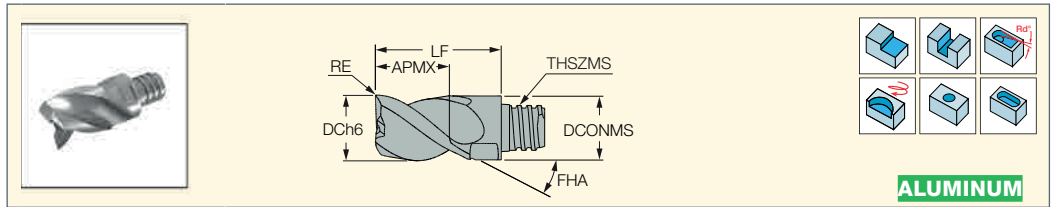


| Designation | Dimensions | | | | | | | | IC08 | Recommended Machining Data | |
|------------------------|------------|--------------------|-------|------|--------|--------|-------|------|------|----------------------------|--|
| | DC | NOF ⁽¹⁾ | APMX | RE | THSZMS | DCONMS | LF | FHA | | f_z (mm/t) | |
| MM EA080H08R0CF-4T05 | 8.00 | 4 | 8.00 | 0.00 | T05 | 7.70 | 15.00 | 40.0 | ● | 0.03-0.09 | |
| MM EA100H10R0CF-4T06 | 10.00 | 4 | 10.00 | 0.00 | T06 | 9.60 | 19.00 | 40.0 | ● | 0.03-0.10 | |
| MM EA120H12R0.2CF-3T08 | 12.00 | 3 | 12.00 | 0.20 | T08 | 11.70 | 23.00 | 40.0 | ● | 0.04-0.11 | |
| MM EA120H12R0CF-4T08 | 12.00 | 4 | 12.00 | 0.00 | T08 | 11.70 | 23.00 | 40.0 | ● | 0.04-0.11 | |
| MM EA160H16R0.0CF-3T10 | 16.00 | 3 | 16.00 | 0.00 | T10 | 15.30 | 28.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA160H16R0.2CF-3T10 | 16.00 | 3 | 16.00 | 0.20 | T10 | 15.30 | 28.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA160H16R0.5CF-3T10 | 16.00 | 3 | 16.00 | 0.50 | T10 | 15.30 | 28.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA160H16R2.5CF-3T10 | 16.00 | 3 | 16.00 | 2.50 | T10 | 15.30 | 28.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA160H16R0CF-4T10 | 16.00 | 4 | 16.00 | 0.00 | T10 | 15.30 | 26.00 | 40.0 | ● | 0.05-0.12 | |
| MM EA200H20R0.0CF-3T12 | 20.00 | 3 | 20.00 | 0.00 | T12 | 18.45 | 34.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA200H20R0.2CF-3T12 | 20.00 | 3 | 20.00 | 0.20 | T12 | 18.45 | 34.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA200H20R0.5CF-3T12 | 20.00 | 3 | 20.00 | 0.50 | T12 | 18.45 | 34.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA200H20R2.5CF-3T12 | 20.00 | 3 | 20.00 | 2.50 | T12 | 18.45 | 34.00 | 40.0 | ● | 0.05-0.13 | |
| MM EA250H19R0.5-3T15 | 25.00 | 3 | 19.00 | 0.50 | T15 | 23.90 | 37.00 | 40.0 | ● | 0.06-0.16 | |
| MM EA250H19R1.0-3T15 | 25.00 | 3 | 19.00 | 1.00 | T15 | 23.90 | 37.00 | 40.0 | ● | 0.06-0.16 | |
| MM EA250H19R3.0-3T15 | 25.00 | 3 | 19.00 | 3.00 | T15 | 23.90 | 37.00 | 40.0 | ● | 0.06-0.16 | |

- For clamping keys (to be ordered separately), tightening torques and clamping instructions, see page 95
- Do not apply lubricant to the threaded connection
- For user guide, see page 92

⁽¹⁾ Number of flutes

MM EA

Interchangeable Solid Carbide Slot Drill Milling Heads for Machining Aluminum

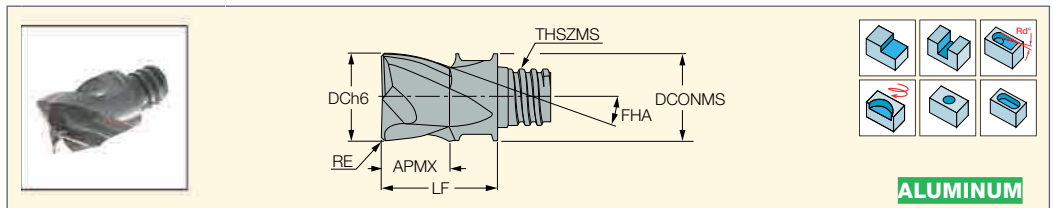

| Designation | Dimensions | | | | | | | | IC08 | Recommended Machining Data | |
|----------------------|------------|--------------------|-------|------|--------|--------|-------|------|------|----------------------------|--|
| | DC | NOF ⁽¹⁾ | APMX | RE | THSZMS | DCONMS | LF | FHA | | f_z (mm/t) | |
| MM EA060B03R0.0-3T04 | 6.00 | 3 | 3.20 | 0.00 | T04 | 5.80 | 8.50 | 45.0 | ● | 0.02-0.05 | |
| MM EA080B05R0.5-2T05 | 8.00 | 2 | 5.00 | 0.50 | T05 | 7.70 | 10.00 | 45.0 | ● | 0.03-0.09 | |
| MM EA080B05R0.5-3T05 | 8.00 | 3 | 5.00 | 0.50 | T05 | 7.70 | 10.00 | 45.0 | ● | 0.03-0.09 | |
| MM EA100B07R0.5-2T06 | 10.00 | 2 | 7.00 | 0.50 | T06 | 9.60 | 13.00 | 45.0 | ● | 0.03-0.10 | |
| MM EA100B07R1.0-2T06 | 10.00 | 2 | 7.00 | 1.00 | T06 | 9.60 | 13.00 | 45.0 | ● | 0.03-0.10 | |
| MM EA100B06R0.5-3T06 | 10.00 | 3 | 6.00 | 0.50 | T06 | 9.60 | 13.00 | 45.0 | ● | 0.03-0.10 | |
| MM EA100B06R1.0-3T06 | 10.00 | 3 | 6.00 | 1.00 | T06 | 9.60 | 13.00 | 45.0 | ● | 0.03-0.10 | |
| MM EA120B09R0.5-2T08 | 12.00 | 2 | 9.00 | 0.50 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.04-0.11 | |
| MM EA120B09R1.0-2T08 | 12.00 | 2 | 9.00 | 1.00 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.04-0.11 | |
| MM EA120B08R0.5-3T08 | 12.00 | 3 | 8.00 | 0.50 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.04-0.11 | |
| MM EA120B08R1.0-3T08 | 12.00 | 3 | 8.00 | 1.00 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.04-0.11 | |
| MM EA120B08R3.0-3T08 | 12.00 | 3 | 8.00 | 3.00 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.04-0.11 | |
| MM EA160B10R000-3T10 | 16.00 | 3 | 10.00 | 0.00 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA160B10R1.0-3T10 | 16.00 | 3 | 10.00 | 1.00 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA160B10R2.0-3T10 | 16.00 | 3 | 10.00 | 2.00 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA160B10R3.0-3T10 | 16.00 | 3 | 10.00 | 3.00 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA160B10R4.0-3T10 | 16.00 | 3 | 10.00 | 4.00 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA200B12R0.5-3T12 | 20.00 | 3 | 12.00 | 0.50 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA200B12R1.0-3T12 | 20.00 | 3 | 12.00 | 1.00 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA200B12R2.0-3T12 | 20.00 | 3 | 12.00 | 2.00 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA200B12R3.0-3T12 | 20.00 | 3 | 12.00 | 3.00 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.05-0.13 | |
| MM EA200B12R4.0-3T12 | 20.00 | 3 | 12.00 | 4.00 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.05-0.13 | |

- For clamping keys (to be ordered separately), tightening torques and clamping instructions, see page 95
- Do not apply lubricant to the threaded connection



⁽¹⁾ Number of flutes



MULTI-MASTER
INDEXABLE SOLID CARBIDE LINE

MM ERA

Interchangeable Solid Carbide
Rough Milling Heads for
Machining Aluminum at High
Metal Removal Rates



ALUMINUM


| Designation | Dimensions | | | | | | | | | IC08 | Recommended Machining Data | |
|-----------------------|------------|--------------------|-------|------|--------|--------|-------|------|--------------------------|-----------|----------------------------|--|
| | DC | NOF ⁽¹⁾ | APMX | RE | THSZMS | DCONMS | LF | FHA | f _z (mm/t) | | | |
| MM ERA080B05R0.2-3T05 | 8.00 | 3 | 5.00 | 0.20 | T05 | 7.70 | 10.00 | 45.0 | ● | 0.03-0.15 | | |
| MM ERA100B06R0.2-3T06 | 10.00 | 3 | 6.00 | 0.20 | T06 | 9.60 | 13.00 | 45.0 | ● | 0.05-0.20 | | |
| MM ERA120B08R0.2-3T08 | 12.00 | 3 | 8.00 | 0.20 | T08 | 11.70 | 16.50 | 45.0 | ● | 0.07-0.22 | | |
| MM ERA160B10R0.2-3T10 | 16.00 | 3 | 10.00 | 0.20 | T10 | 15.30 | 20.50 | 45.0 | ● | 0.07-0.25 | | |
| MM ERA200B12R0.2-3T12 | 20.00 | 3 | 12.00 | 0.20 | T12 | 18.45 | 25.50 | 45.0 | ● | 0.07-0.25 | | |
| MM ERA250B19R0.2-3T15 | 25.00 | 3 | 19.00 | 0.20 | T15 | 23.90 | 37.00 | 45.0 | ● | 0.07-0.25 | | |

- For clamping keys (to be ordered separately), tightening torques and clamping instructions, see page 95
 - Do not apply lubricant to the threaded connection
 - For user guide, see page 92
- ⁽¹⁾ Number of flutes

MULTI-MASTER
INDEXABLE SOLID CARBIDE LINE

MM EBA

Interchangeable 2 Flute High
Precision Solid Carbide Ball Nose
Heads for Machining Aluminum

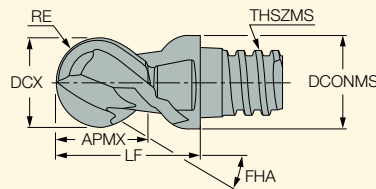

ALUMINUM

| Designation | Dimensions | | | | | | | | | | IC08 |
|-------------------|--------------------|--------------------|-------|-------|----------------------|--------|--------|-------|------|---|------|
| | DCX ⁽¹⁾ | NOF ⁽²⁾ | APMX | RE | RETOL ⁽³⁾ | THSZMS | DCONMS | LF | FHA | | |
| MM EBA080B05-2T05 | 8.00 | 2 | 5.00 | 3.98 | 0.010 | T05 | 7.70 | 10.00 | 45.0 | ● | |
| MM EBA100B07-2T06 | 10.00 | 2 | 7.00 | 4.98 | 0.010 | T06 | 9.60 | 13.00 | 45.0 | ● | |
| MM EBA120B09-2T08 | 12.00 | 2 | 9.00 | 5.98 | 0.012 | T08 | 11.50 | 16.50 | 45.0 | ● | |
| MM EBA160B12-2T10 | 16.00 | 2 | 12.00 | 7.98 | 0.012 | T10 | 15.30 | 20.50 | 45.0 | ● | |
| MM EBA200B15-2T12 | 20.00 | 2 | 15.00 | 9.97 | 0.012 | T12 | 18.45 | 25.50 | 45.0 | ● | |
| MM EBA250B22-2T15 | 25.00 | 2 | 22.00 | 12.50 | 0.012 | T15 | 23.90 | 37.00 | 45.0 | ● | |

- For clamping keys (to be ordered separately), tightening torques and clamping instructions, see page 95
 - Do not apply lubricant to the threaded connection
 - For user guide, see page 92
- ⁽¹⁾ Cutting diameter maximum
⁽²⁾ Number of flutes
⁽³⁾ Corner radius tolerance (+/-)


Machining Data for MULTI-MASTER Groove Milling Heads

| ISO | Material | Condition | Hardness HB | Material No. | MM-TS | | | MM-GRIT K-TYPE | | | MM-GRIT P-TYPE | | | |
|-----|-------------------------|------------------------------|------------------|-----------------|----------|----------------------|----------------------|----------------|----------------------|----------------------|----------------|----------------------|----------------------|------|
| | | | | | Speed | Feed mm/t | | Speed | Feed mm/t | | Speed | Feed mm/t | | |
| | | | | | V m/min | F _z (min) | F _z (max) | V m/min | F _z (min) | F _z (max) | V m/min | F _z (min) | F _z (max) | |
| G | aluminum-wrought alloys | not hardenable | 60 | 21 | 800-1200 | 0.10 | 0.20 | - | - | - | 800-1200 | 0.05 | 0.15 | |
| | | hardenable | 100 | 22 | 800-1200 | 0.10 | 0.20 | - | - | - | 800-1200 | 0.05 | 0.15 | |
| G | aluminum-cast alloys | ≤12% Si | not hardenable | 75 | 23 | - | - | - | - | - | - | 600-1000 | 0.05 | 0.15 |
| | | hardenable | 90 | 24 | - | - | - | - | - | - | - | 500-1000 | 0.05 | 0.15 |
| | | >12% Si | high temperature | 130 | 25 | - | - | - | - | - | - | 200-400 | 0.05 | 0.15 |
| N | copper alloys | >1% Pb | free cutting | 110 | 26 | - | - | - | - | - | - | - | - | |
| | | brass | 90 | 27 | - | - | - | - | - | - | - | - | - | |
| | | electrolytic copper | 100 | 28 | - | - | - | - | - | - | - | - | - | |
| N | non metallic | duroplastics, fiber plastics | | 29 | - | - | - | - | - | - | - | - | - | |
| | | hard rubber | | 30 | - | - | - | - | - | - | - | - | - | |





Clamping and Indexing Instructions

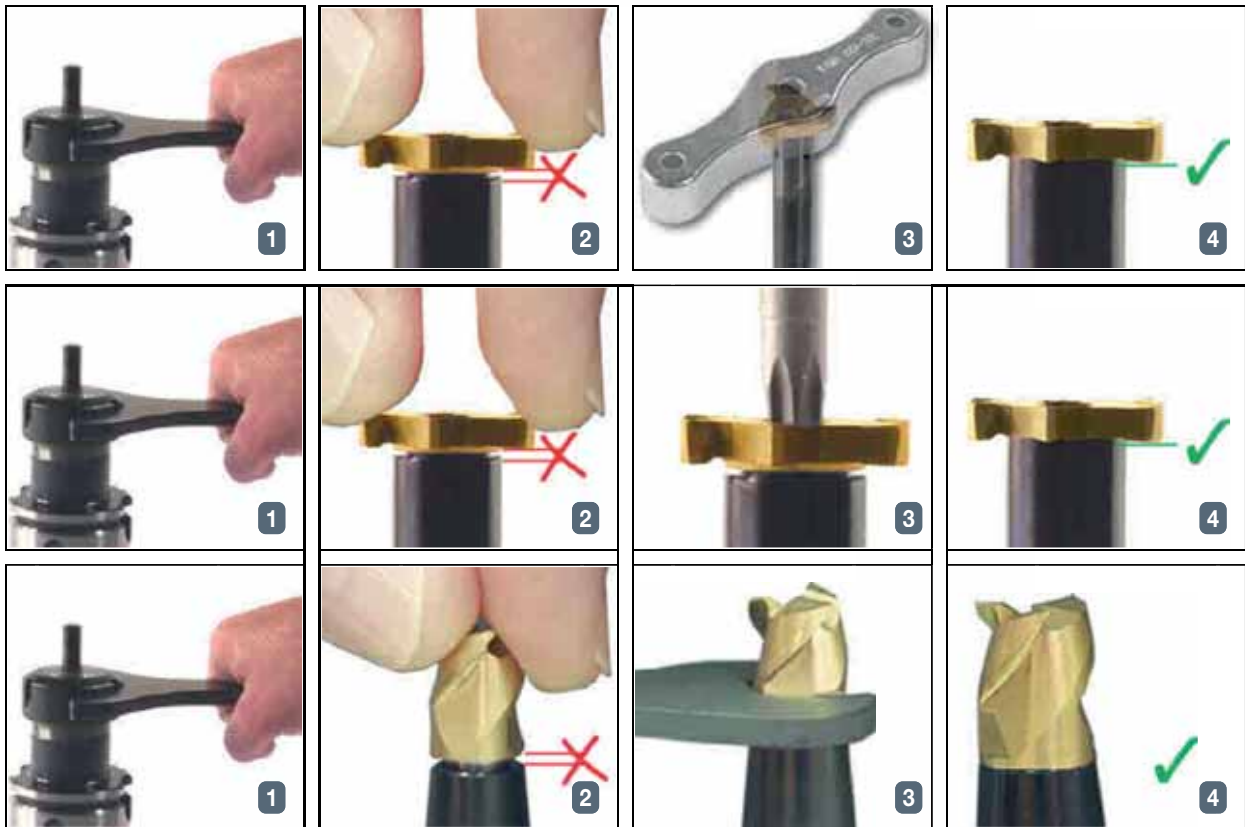

Do not apply lubricant to the threaded connection

| Thread Size | Key ⁽¹⁾ | Tightening Torque (NxcM) |
|-------------|--------------------|--------------------------|
| T04 | MM key 6x4 | 400 |
| T05 | MM key 6x4 | 700 |
| T06 | MM key 8x5 | 1000 |
| T08 | MM key 10x7 | 1500 |
| T10 | MM key 13x8 | 2800 |
| T12 | MM key 16x9 | 2800 |
| T15 | MM key 20 | 4000 |
| T21 | MM wrench 24-21 | 11000 |

⁽¹⁾ Order separately




Solid Carbide Cutters

CHATTERFREE
SOLID MILL LINE

ECA-H3-CF

Solid Carbide Endmills with Different Helix, Variable Pitch, and Relieved Neck for Machining Aluminum

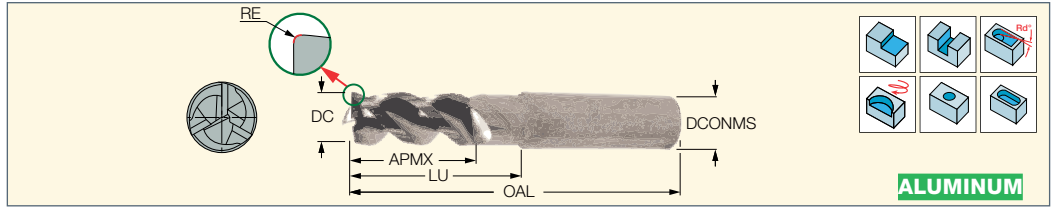

ALUMINUM

| Designation | Dimensions | | | | | | | | | Tough ↔ Hard | | Recommended Machining Data f _z (mm/t) |
|---------------------------|------------|--------|-------|--------|--------------------|-------|---------------------|----------------------|------|--------------|--------|--|
| | DC | DCONMS | APMX | OAL | NOF ⁽¹⁾ | LU | RMPX ⁽²⁾ | Shank ⁽³⁾ | RE | IC08 | IC1508 | |
| ECA-H3 01-04C06CF-R.05 | 1.00 | 6.00 | 4.00 | 57.00 | 3 | - | 5.0 | C | 0.05 | ● | | 0.01-0.01 |
| ECA-H3 015-04/06C06CF-R01 | 1.50 | 6.00 | 4.00 | 57.00 | 3 | 6.00 | 5.0 | C | 0.10 | ● | | 0.01-0.01 |
| ECA-H3 02-05/08C06CF-R01 | 2.00 | 6.00 | 5.00 | 57.00 | 3 | 8.00 | 5.0 | C | 0.10 | ● | | 0.01-0.02 |
| ECA-H3 025-05/08C06CF-R01 | 2.50 | 6.00 | 5.00 | 57.00 | 3 | 8.00 | 5.0 | C | 0.10 | ● | | 0.01-0.02 |
| ECA-H3 03-07/12C06CF-R01 | 3.00 | 6.00 | 7.00 | 57.00 | 3 | 12.00 | 5.0 | C | 0.10 | ● | | 0.03-0.05 |
| ECA-H3 04-10/16C06CF-R02 | 4.00 | 6.00 | 10.00 | 57.00 | 3 | 16.00 | 5.0 | C | 0.20 | ● | | 0.03-0.05 |
| ECA-H3 05-12/20C06CF-R02 | 5.00 | 6.00 | 12.00 | 57.00 | 3 | 20.00 | 5.0 | C | 0.20 | ● | | 0.03-0.06 |
| ECA-H3 06-09/18C06CF-R02 | 6.00 | 6.00 | 9.00 | 57.00 | 3 | 18.00 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-09/18C06CF-R02D | 6.00 | 6.00 | 9.00 | 57.00 | 3 | 18.00 | 5.0 | C | 0.20 | | ● | 0.03-0.07 |
| ECA-H3 06-09/18C06CF-R04 | 6.00 | 6.00 | 9.00 | 57.00 | 3 | 18.00 | 5.0 | C | 0.40 | ● | | 0.03-0.07 |
| ECA-H3 06-09/18C06CF-R08 | 6.00 | 6.00 | 9.00 | 57.00 | 3 | 18.00 | 5.0 | C | 0.80 | ● | | 0.03-0.07 |
| ECA-H3 06-09/30C06CF-R02 | 6.00 | 6.00 | 9.00 | 65.00 | 3 | 30.00 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-09/30C06CF-R02D | 6.00 | 6.00 | 9.00 | 65.00 | 3 | 30.00 | 5.0 | C | 0.20 | | ● | 0.03-0.07 |
| ECA-H3 06-09/30C06CF-R04 | 6.00 | 6.00 | 9.00 | 65.00 | 3 | 30.00 | 5.0 | C | 0.40 | ● | | 0.03-0.07 |
| ECA-H3 06-09/30C06CF-R08 | 6.00 | 6.00 | 9.00 | 65.00 | 3 | 30.00 | 5.0 | C | 0.80 | ● | | 0.03-0.07 |
| ECA-H3 06-09C06CF-R02-57 | 6.00 | 6.00 | 9.00 | 57.00 | 3 | - | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-12/18C06CF-R02C | 6.00 | 6.00 | 12.00 | 57.00 | 3 | 18.00 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-12/30C06CF-R02C | 6.00 | 6.00 | 12.00 | 64.00 | 3 | 30.00 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-14/24C06CF-R02 | 6.00 | 6.00 | 14.00 | 60.00 | 3 | 24.00 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-H3 06-14/24C06CF-R02D | 6.00 | 6.00 | 14.00 | 60.00 | 3 | 24.00 | 5.0 | C | 0.20 | | ● | 0.03-0.07 |
| ECA-H3 08-12/24C08CF-R02 | 8.00 | 8.00 | 12.00 | 63.00 | 3 | 24.00 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-12/24C08CF-R02D | 8.00 | 8.00 | 12.00 | 63.00 | 3 | 24.00 | 5.0 | C | 0.20 | | ● | 0.03-0.09 |
| ECA-H3 08-12/24C08CF-R04 | 8.00 | 8.00 | 12.00 | 63.00 | 3 | 24.00 | 5.0 | C | 0.40 | ● | | 0.03-0.09 |
| ECA-H3 08-12/24C08CF-R08 | 8.00 | 8.00 | 12.00 | 63.00 | 3 | 24.00 | 5.0 | C | 0.80 | ● | | 0.03-0.09 |
| ECA-H3 08-12/24C08CF-R30 | 8.00 | 8.00 | 12.00 | 63.00 | 3 | 24.00 | 5.0 | C | 3.00 | ● | | 0.03-0.09 |
| ECA-H3 08-12/40C08CF-R02 | 8.00 | 8.00 | 12.00 | 79.00 | 3 | 40.00 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-12/40C08CF-R02D | 8.00 | 8.00 | 12.00 | 79.00 | 3 | 40.00 | 5.0 | C | 0.20 | | ● | 0.03-0.09 |
| ECA-H3 08-12/40C08CF-R04 | 8.00 | 8.00 | 12.00 | 79.00 | 3 | 40.00 | 5.0 | C | 0.40 | ● | | 0.03-0.09 |
| ECA-H3 08-12/40C08CF-R08 | 8.00 | 8.00 | 12.00 | 79.00 | 3 | 40.00 | 5.0 | C | 0.80 | ● | | 0.03-0.09 |
| ECA-H3 08-12C08CF-R02-63 | 8.00 | 8.00 | 12.00 | 63.00 | 3 | - | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-16/24C08CF-R02C | 8.00 | 8.00 | 16.00 | 63.00 | 3 | 24.00 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-16/40C08CF-R02C | 8.00 | 8.00 | 16.00 | 78.00 | 3 | 40.00 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-18/32C08CF-R02 | 8.00 | 8.00 | 18.00 | 68.00 | 3 | 32.00 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-H3 08-18/32C08CF-R02D | 8.00 | 8.00 | 18.00 | 68.00 | 3 | 32.00 | 5.0 | C | 0.20 | | ● | 0.03-0.09 |
| ECA-H3 10-15/30C10CF-R02 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-15/30C10CF-R02D | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 0.20 | | ● | 0.03-0.10 |
| ECA-H3 10-15/30C10CF-R04 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 0.40 | ● | | 0.03-0.10 |
| ECA-H3 10-15/30C10CF-R08 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 0.80 | ● | | 0.03-0.10 |
| ECA-H3 10-15/30C10CF-R16 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 1.60 | ● | | 0.03-0.10 |
| ECA-H3 10-15/30C10CF-R30 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | 30.00 | 5.0 | C | 3.00 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R02 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R02D | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 0.20 | | ● | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R04 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 0.40 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R08 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 0.80 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R16 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 1.60 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R20 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 2.00 | ● | | 0.03-0.10 |
| ECA-H3 10-15/50C10CF-R30 | 10.00 | 10.00 | 15.00 | 92.00 | 3 | 50.00 | 5.0 | C | 3.00 | ● | | 0.03-0.10 |
| ECA-H3 10-15C10CF-R02-72 | 10.00 | 10.00 | 15.00 | 72.00 | 3 | - | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-20/30C10CF-R02C | 10.00 | 10.00 | 20.00 | 72.00 | 3 | 30.00 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-20/50C10CF-R02C | 10.00 | 10.00 | 20.00 | 100.00 | 3 | 50.00 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-22/40C10CF-R02 | 10.00 | 10.00 | 22.00 | 80.00 | 3 | 40.00 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-H3 10-22/40C10CF-R02D | 10.00 | 10.00 | 22.00 | 80.00 | 3 | 40.00 | 5.0 | C | 0.20 | | ● | 0.03-0.10 |
| ECA-H3 10-22/40C10CF-R30 | 10.00 | 10.00 | 22.00 | 80.00 | 3 | 40.00 | 5.0 | C | 3.00 | ● | | 0.03-0.10 |

• For user guide, see page 103 • Grade IC1508 - DLC Coating

⁽¹⁾ Number of flutes

⁽²⁾ Maximum ramping angle

⁽³⁾ C-Cylindrical




Scan the QR code for additional information.
Enter the item description in the search field to access additional related data.

Continued

CHATTERFREE
SOLID MILL LINE

ECA-H3-CF

Solid Carbide Endmills with Different Helix, Variable Pitch, and Relieved Neck for Machining Aluminum

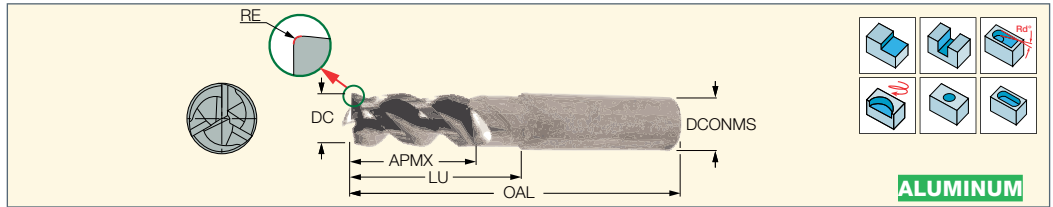

| Designation | Dimensions | | | | | | | | | Tough ↔ Hard | | Recommended Machining Data f _z (mm/t) |
|---------------------------|------------|--------|-------|--------|--------------------|--------|---------------------|----------------------|------|--------------|--------|---|
| | DC | DCONMS | APMX | OAL | NOF ⁽¹⁾ | LU | RMPX ⁽²⁾ | Shank ⁽³⁾ | RE | IC08 | IC1508 | |
| ECA-H3 20-30/60C20CF-R50 | 20.00 | 20.00 | 30.00 | 110.00 | 3 | 60.00 | 5.0 | C | 5.00 | ● | | 0.05-0.14 |
| ECA-H3 20-40/60C20CF-R02C | 20.00 | 20.00 | 40.00 | 109.00 | 3 | 60.00 | 5.0 | C | 0.20 | ● | | 0.05-0.14 |
| ECA-H3 20-42/80C20CF-R02 | 20.00 | 20.00 | 42.00 | 130.00 | 3 | 80.00 | 5.0 | C | 0.20 | ● | | 0.05-0.14 |
| ECA-H3 20-42/80C20CF-R02D | 20.00 | 20.00 | 42.00 | 130.00 | 3 | 80.00 | 5.0 | C | 0.20 | | ● | 0.05-0.14 |
| ECA-H320-40/100C20CF-R02C | 20.00 | 20.00 | 40.00 | 149.00 | 3 | 100.00 | 5.0 | C | 0.20 | ● | | 0.05-0.14 |
| ECA-H3 25-38/125C25CF-R02 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 0.20 | ● | | 0.05-0.15 |
| ECA-H3 25-38/125C25CF-R08 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 0.80 | ● | | 0.05-0.15 |
| ECA-H3 25-38/125C25CF-R16 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 1.60 | ● | | 0.05-0.15 |
| ECA-H3 25-38/125C25CF-R20 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 2.00 | ● | | 0.05-0.15 |
| ECA-H3 25-38/125C25CF-R40 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 4.00 | ● | | 0.05-0.15 |
| ECA-H3 25-38/125C25CF-R50 | 25.00 | 25.00 | 38.00 | 185.00 | 3 | 125.00 | 5.0 | C | 5.00 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R02 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 0.20 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R04 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 0.40 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R16 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 1.60 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R20 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 2.00 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R32 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 3.20 | ● | | 0.05-0.15 |
| ECA-H3 25-38/75C25CF-R50 | 25.00 | 25.00 | 38.00 | 130.00 | 3 | 75.00 | 5.0 | C | 5.00 | ● | | 0.05-0.15 |
| ECA-H3 25-50/75C25CF-R02C | 25.00 | 25.00 | 50.00 | 128.00 | 3 | 75.00 | 5.0 | C | 0.20 | ● | | 0.05-0.15 |
| ECA-H3 25-52/100C25CF-R02 | 25.00 | 25.00 | 52.00 | 156.00 | 3 | 100.00 | 5.0 | C | 0.20 | ● | | 0.05-0.15 |
| ECA-H325-50/125C25CF-R02C | 25.00 | 25.00 | 50.00 | 183.00 | 3 | 125.00 | 5.0 | C | 0.20 | ● | | 0.05-0.15 |

• For user guide, see page 103 • Grade IC1508 - DLC Coating

⁽¹⁾ Number of flutes


⁽²⁾ Maximum ramping angle

⁽³⁾ C-Cylindrical

SOLIDMILL
PREMIUM LINE
CHATTERFREE
SOLID MILL LINE

ECA-H4-CF

Solid Carbide Endmills with Different Helix and Long Neck Relief for Machining Aluminum

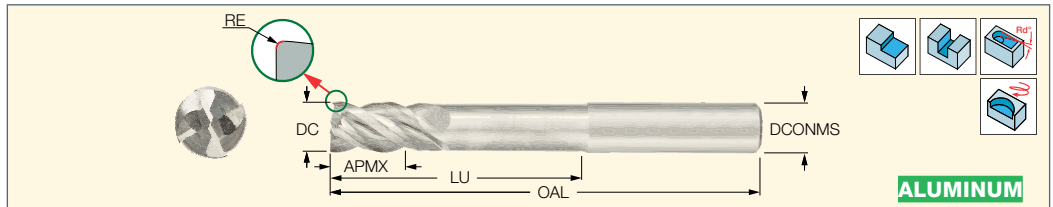

| Designation | Dimensions | | | | | | | | | IC08 | Recommended Machining Data f _z (mm/t) |
|--------------------------|------------|-------|--------|--------|--------|------|--------------------|---------------------|----------------------|------|---|
| | DC | APMX | LU | OAL | DCONMS | RE | NOF ⁽¹⁾ | RMPX ⁽²⁾ | Shank ⁽³⁾ | | |
| ECA-H4 06-09/30C06CFR02 | 6.00 | 9.00 | 30.00 | 65.00 | 6.00 | 0.20 | 4 | 5.0 | C | ● | 0.03-0.07 |
| ECA-H4 06-12/18C06CFR02 | 6.00 | 12.00 | 18.00 | 57.00 | 6.00 | 0.20 | 4 | 5.0 | C | ● | 0.03-0.07 |
| ECA-H4 08-12/40C08CFR02 | 8.00 | 12.00 | 40.00 | 79.00 | 8.00 | 0.20 | 4 | 5.0 | C | ● | 0.03-0.09 |
| ECA-H4 08-16/24C08CFR02 | 8.00 | 16.00 | 24.00 | 63.00 | 8.00 | 0.20 | 4 | 5.0 | C | ● | 0.03-0.09 |
| ECA-H4 10-15/50C10CFR02 | 10.00 | 15.00 | 50.00 | 92.00 | 10.00 | 0.20 | 4 | 5.0 | C | ● | 0.04-0.10 |
| ECA-H4 10-20/30C10CFR02 | 10.00 | 20.00 | 30.00 | 72.00 | 10.00 | 0.20 | 4 | 5.0 | C | ● | 0.04-0.10 |
| ECA-H4 12-18/60C12CFR02 | 12.00 | 18.00 | 60.00 | 100.00 | 12.00 | 0.20 | 4 | 5.0 | C | ● | 0.04-0.11 |
| ECA-H4 12-24/36C12CFR02 | 12.00 | 24.00 | 36.00 | 83.00 | 12.00 | 0.20 | 4 | 5.0 | C | ● | 0.04-0.11 |
| ECA-H4 16-24/80C16CFR02 | 16.00 | 24.00 | 80.00 | 128.00 | 16.00 | 0.20 | 4 | 5.0 | C | ● | 0.05-0.13 |
| ECA-H4 16-32/48C16CFR02 | 16.00 | 32.00 | 48.00 | 100.00 | 16.00 | 0.20 | 4 | 5.0 | C | ● | 0.05-0.13 |
| ECA-H4 20-30/100C20CFR02 | 20.00 | 30.00 | 100.00 | 150.00 | 20.00 | 0.20 | 4 | 5.0 | C | ● | 0.05-0.14 |
| ECA-H4 20-40/60C20CFR02 | 20.00 | 40.00 | 60.00 | 110.00 | 20.00 | 0.20 | 4 | 5.0 | C | ● | 0.05-0.14 |
| ECA-H4 25-38/125C25CFR02 | 25.00 | 38.00 | 125.00 | 185.00 | 25.00 | 0.20 | 4 | 5.0 | C | ● | 0.08-0.14 |
| ECA-H4 25-50/75C25CFR02 | 25.00 | 50.00 | 75.00 | 130.00 | 25.00 | 0.20 | 4 | 5.0 | C | ● | 0.08-0.14 |

• For user guide, see page 103

⁽¹⁾ Number of flutes


⁽²⁾ Maximum ramping angle

⁽³⁾ C-Cylindrical



ECAP-H3-CF

Solid Carbide Endmills with Different Helix, Variable Pitch, Chip Splitters, and Coolant Holes for Machining Aluminum

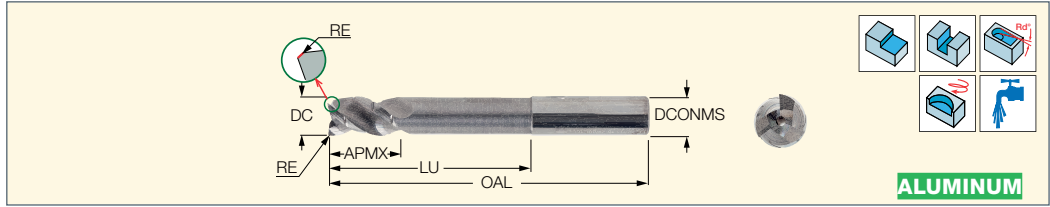


| Designation | Dimensions | | | | | | | | | IC08 | Recommended Machining Data |
|---------------------------|------------|-------|-------|--------|--------|------|--------------------|---------------------|----------------------|------|----------------------------|
| | DC | APMX | LU | OAL | DCONMS | RE | NOF ⁽¹⁾ | RMPX ⁽²⁾ | Shank ⁽³⁾ | | f _z (mm/t) |
| ECAP-H3 10-15/50C10CFR02C | 10.00 | 15.00 | 50.0 | 92.00 | 10.00 | 0.20 | 3 | 5.0 | C | ● | 0.03-0.10 |
| ECAP-H3 10-22/40C10CFR02C | 10.00 | 22.00 | 40.0 | 80.00 | 10.00 | 0.20 | 3 | 5.0 | C | ● | 0.03-0.10 |
| ECAP-H3 12-18/60C12CFR02C | 12.00 | 18.00 | 60.0 | 100.00 | 12.00 | 0.20 | 3 | 5.0 | C | ● | 0.04-0.11 |
| ECAP-H3 12-26/48C12CFR02C | 12.00 | 26.00 | 48.0 | 93.00 | 12.00 | 0.20 | 3 | 5.0 | C | ● | 0.04-0.11 |
| ECAP-H3 16-24/80C16CFR02C | 16.00 | 24.00 | 80.0 | 128.00 | 16.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.13 |
| ECAP-H3 16-34/64C16CFR02C | 16.00 | 34.00 | 64.0 | 115.00 | 16.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.13 |
| ECAP-H320-30/100C20CFR02C | 20.00 | 30.00 | 100.0 | 150.00 | 20.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.14 |
| ECAP-H3 20-42/80C20CFR02C | 20.00 | 42.00 | 80.0 | 130.00 | 20.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.14 |
| ECAP-H325-38/125C25CFR02C | 25.00 | 38.00 | 125.0 | 185.00 | 25.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.14 |
| ECAP-H325-52/100C25CFR02C | 25.00 | 52.00 | 100.0 | 158.00 | 25.00 | 0.20 | 3 | 5.0 | C | ● | 0.05-0.14 |

- For user guide, see page 103
- ⁽¹⁾ Number of flutes
- ⁽²⁾ Maximum ramping angle
- ⁽³⁾ C-Cylindrical

SOLIDSHRED

ECR-B3-R

3 Flute, 45° Helix Solid Carbide Roughing Endmills with 3xD Relieved Necks for High Stock Removal Rates of Aluminum

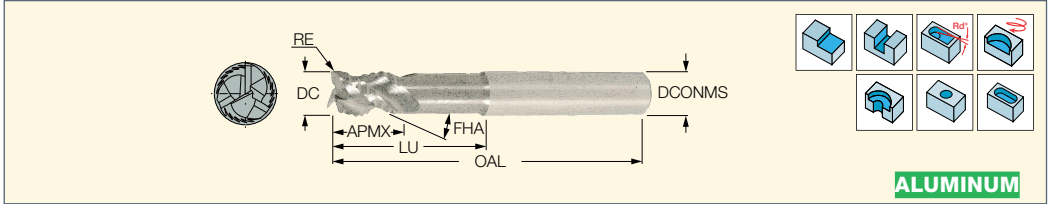

| Designation | Dimensions | | | | | | | | | | | Tough ↔ Hard | | Recommended Machining Data |
|---------------------------|------------|--------|-------|--------|--------------------|------|---------------------|-------|----------------------|------|------|--------------|-----------------------|----------------------------|
| | DC | DCONMS | LU | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | APMX | Shank ⁽³⁾ | RE | IC08 | IC1508 | f _z (mm/t) | |
| ECR-B3 06-09/21C06R02A57 | 6.00 | 6.00 | 21.00 | 57.00 | 3 | 45.0 | 5.0 | 9.00 | C | 0.20 | ● | | 0.03-0.07 | |
| ECR-B3 06-09/21C06R02DA57 | 6.00 | 6.00 | 21.00 | 57.00 | 3 | 45.0 | 5.0 | 9.00 | C | 0.20 | ● | ● | 0.03-0.07 | |
| ECR-B3 06-09/21W06R02A57 | 6.00 | 6.00 | 21.00 | 57.00 | 3 | 45.0 | 5.0 | 9.00 | W | 0.20 | ● | | 0.03-0.07 | |
| ECR-B3 06-09/30C06R02A65 | 6.00 | 6.00 | 30.00 | 65.00 | 3 | 45.0 | 5.0 | 9.00 | C | 0.20 | ● | | 0.03-0.07 | |
| ECR-B3 06-09/30W06R02A65 | 6.00 | 6.00 | 30.00 | 65.00 | 3 | 45.0 | 5.0 | 9.00 | W | 0.20 | ● | | 0.03-0.07 | |
| ECR-B3 08-12/27C08R02A63 | 8.00 | 8.00 | 27.00 | 63.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | | 0.03-0.15 | |
| ECR-B3 08-12/27C08R02DA63 | 8.00 | 8.00 | 27.00 | 63.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | ● | 0.03-0.15 | |
| ECR-B3 08-12/27W08R02A63 | 8.00 | 8.00 | 27.00 | 63.00 | 3 | 45.0 | 5.0 | 12.00 | W | 0.20 | ● | | 0.03-0.15 | |
| ECR-B3 08-12/40C08R02A78 | 8.00 | 8.00 | 40.00 | 78.50 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | | 0.03-0.15 | |
| ECR-B3 08-12/40W08R02A78 | 8.00 | 8.00 | 40.00 | 78.50 | 3 | 45.0 | 5.0 | 12.00 | W | 0.20 | ● | | 0.03-0.15 | |
| ECR-B3 10-12/31C10R02A72 | 10.00 | 10.00 | 31.00 | 72.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | | 0.05-0.20 | |
| ECR-B3 10-12/31C10R02DA72 | 10.00 | 10.00 | 31.00 | 72.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | ● | 0.05-0.20 | |
| ECR-B3 10-12/31W10R02A72 | 10.00 | 10.00 | 31.00 | 72.00 | 3 | 45.0 | 5.0 | 12.00 | W | 0.20 | ● | | 0.05-0.20 | |
| ECR-B3 10-12/50C10R02A100 | 10.00 | 10.00 | 50.00 | 100.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | | 0.05-0.20 | |
| ECR-B3 10-12/50W10R02A100 | 10.00 | 10.00 | 50.00 | 100.00 | 3 | 45.0 | 5.0 | 12.00 | W | 0.20 | ● | | 0.05-0.20 | |
| ECR-B3 12-12/37C12R02A83 | 12.00 | 12.00 | 37.00 | 83.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | | 0.07-0.22 | |
| ECR-B3 12-12/37C12R02DA83 | 12.00 | 12.00 | 37.00 | 83.00 | 3 | 45.0 | 5.0 | 12.00 | C | 0.20 | ● | ● | 0.07-0.22 | |
| ECR-B3 12-12/37W12R02A83 | 12.00 | 12.00 | 37.00 | 83.00 | 3 | 45.0 | 5.0 | 12.00 | W | 0.20 | ● | | 0.07-0.22 | |
| ECR-B3 12-14/55C12R02A100 | 12.00 | 12.00 | 55.00 | 100.00 | 3 | 45.0 | 5.0 | 14.00 | C | 0.20 | ● | | 0.07-0.22 | |
| ECR-B3 12-14/55W12R02A100 | 12.00 | 12.00 | 55.00 | 100.00 | 3 | 45.0 | 5.0 | 14.00 | W | 0.20 | ● | | 0.07-0.22 | |
| ECR-B3 16-14/43C16R02A92 | 16.00 | 16.00 | 43.00 | 92.00 | 3 | 45.0 | 5.0 | 14.00 | C | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 16-14/43C16R02DA92 | 16.00 | 16.00 | 43.00 | 92.00 | 3 | 45.0 | 5.0 | 14.00 | C | 0.20 | ● | ● | 0.07-0.25 | |
| ECR-B3 16-14/43W16R02A92 | 16.00 | 16.00 | 43.00 | 92.00 | 3 | 45.0 | 5.0 | 14.00 | W | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 16-18/80C16R02A150 | 16.00 | 16.00 | 80.00 | 150.00 | 3 | 45.0 | 5.0 | 18.00 | C | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 16-18/80W16R02A150 | 16.00 | 16.00 | 80.00 | 150.00 | 3 | 45.0 | 5.0 | 18.00 | W | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 20-17/53C20R02A104 | 20.00 | 20.00 | 53.00 | 104.00 | 3 | 45.0 | 5.0 | 17.00 | C | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 20-17/53W20R02A104 | 20.00 | 20.00 | 53.00 | 104.00 | 3 | 45.0 | 5.0 | 17.00 | W | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 20-22/80C20R02A150 | 20.00 | 20.00 | 80.00 | 150.00 | 3 | 45.0 | 5.0 | 22.00 | C | 0.20 | ● | | 0.07-0.25 | |
| ECR-B3 20-22/80W20R02A150 | 20.00 | 20.00 | 80.00 | 150.00 | 3 | 45.0 | 5.0 | 22.00 | W | 0.20 | ● | | 0.07-0.25 | |


- For user guide, see page 103 • Grade IC1508 - DLC Coating
- ⁽¹⁾ Number of flutes
- ⁽²⁾ Maximum ramping angle
- ⁽³⁾ C-Cylindrical, W-Weldon



SOLIDMILL
PREMIUM LINE
SOLIDSHRED

ECR-B3-R-C

3 Flute, 45° Helix Solid Carbide
Roughing Endmills with 3xD
Relieved Necks and Coolant
Channels for Aluminum

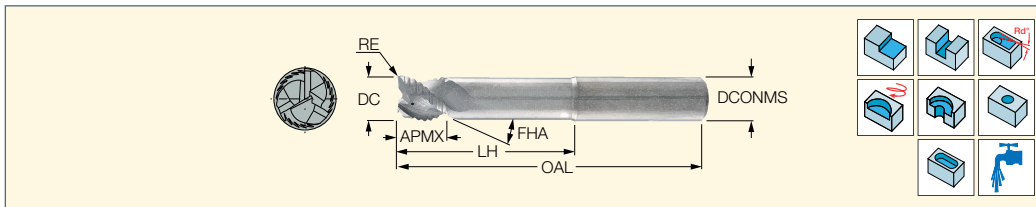


| Designation | Dimensions | | | | | | | | | | IC08 | Recommended Machining Data | |
|---------------------------|------------|--------|-------|--------|--------------------|------|---------------------|-------|----------------------|------|------|----------------------------|--|
| | DC | DCONMS | LH | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | APMX | Shank ⁽³⁾ | RE | | f _z (mm/t) | |
| ECR-B3 08-12/41C08R02A83C | 8.00 | 8.00 | 41.0 | 83.00 | 3 | 45.0 | 20.0 | 12.00 | C | 0.20 | ● | 0.05-0.15 | |
| ECR-B3 08-12/41C08R20A83C | 8.00 | 8.00 | 41.0 | 83.00 | 3 | 45.0 | 20.0 | 12.00 | C | 2.00 | ● | 0.05-0.15 | |
| ECR-B3 10-12/41C10R.2A83C | 10.00 | 10.00 | 41.0 | 83.00 | 3 | 45.0 | 20.0 | 12.00 | C | 0.20 | ● | 0.07-0.20 | |
| ECR-B3 10-12/41C10R20A83C | 10.00 | 10.00 | 41.0 | 83.00 | 3 | 45.0 | 20.0 | 12.00 | C | 2.00 | ● | 0.07-0.20 | |
| ECR-B3 12-12/41C12R.2A87C | 12.00 | 12.00 | 41.0 | 87.00 | 3 | 45.0 | 20.0 | 12.00 | C | 0.20 | ● | 0.10-0.22 | |
| ECR-B3 16-14/60C16R2A109C | 16.00 | 16.00 | 60.0 | 109.00 | 3 | 45.0 | 20.0 | 14.00 | C | 2.00 | ● | 0.10-0.25 | |
| ECR-B316-14/60C16R.2A109C | 16.00 | 16.00 | 60.0 | 109.00 | 3 | 45.0 | 20.0 | 14.00 | C | 0.20 | ● | 0.10-0.25 | |
| ECR-B316-14/60C16R40A109C | 16.00 | 16.00 | 60.0 | 109.00 | 3 | 45.0 | 20.0 | 14.00 | C | 4.00 | ● | 0.10-0.25 | |
| ECR-B320-17/60C20R40A111C | 20.00 | 20.00 | 60.0 | 111.00 | 3 | 45.0 | 20.0 | 17.00 | C | 4.00 | ● | 0.10-0.25 | |
| ECR-B320-30/100C25R4A150C | 20.00 | 20.00 | 100.0 | 150.00 | 3 | 45.0 | 20.0 | 30.00 | C | 4.00 | ● | 0.10-0.25 | |
| ECR-B325-25/74C25R40A130C | 25.00 | 25.00 | 74.0 | 130.00 | 3 | 45.0 | 20.0 | 25.00 | C | 4.00 | ● | 0.10-0.25 | |

- For user guide, see page 103
- ⁽¹⁾ Number of flutes
- ⁽²⁾ Maximum ramping angle
- ⁽³⁾ C-Cylindrical

SOLIDSHRED

ERC-E-3

3 Flute, 38° Helix Medium
Length Solid Carbide Roughing
Endmills with 3xD Relieved
Necks for Machining Aluminum

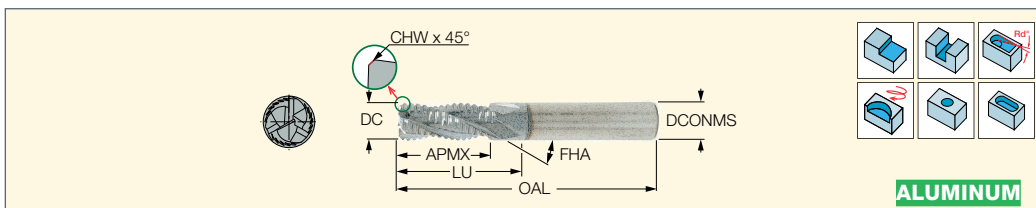

ALUMINUM


| Designation | Dimensions | | | | | | | | | | Tough ↔ Hard | | Recommended Machining Data | |
|------------------------|------------|--------|-------|-------|--------|--------------------|------|---------------------|----------------------|------|--------------|------|----------------------------|-----------|
| | DC | DCONMS | APMX | LU | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | Shank ⁽³⁾ | CHW | KCH | IC08 | | IC1508 |
| ERC060E13-3C06 | 6.00 | 6.00 | 13.00 | 21.00 | 57.00 | 3 | 38.0 | 5.0 | C | 0.50 | 45.0 | ● | ● | 0.03-0.07 |
| ERC060E13-3C06CH05DA57 | 6.00 | 6.00 | 13.00 | 21.00 | 57.00 | 3 | 38.0 | 5.0 | C | 0.50 | 45.0 | ● | ● | 0.03-0.07 |
| ERC060E13-3W06 | 6.00 | 6.00 | 13.00 | 21.00 | 57.00 | 3 | 38.0 | 5.0 | W | 0.50 | 45.0 | ● | ● | 0.03-0.07 |
| ERC080E20-3C08 | 8.00 | 8.00 | 20.00 | 28.00 | 63.00 | 3 | 38.0 | 5.0 | C | 0.50 | 45.0 | ● | ● | 0.03-0.15 |
| ERC080E20-3C08CH05DA63 | 8.00 | 8.00 | 20.00 | 28.00 | 63.00 | 3 | 38.0 | 5.0 | C | 0.50 | 45.0 | ● | ● | 0.03-0.15 |
| ERC080E20-3W08 | 8.00 | 8.00 | 20.00 | 28.00 | 63.00 | 3 | 38.0 | 5.0 | W | 0.50 | 45.0 | ● | ● | 0.03-0.15 |
| ERC100E22-3C10 | 10.00 | 10.00 | 22.00 | 30.00 | 72.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.05-0.20 |
| ERC100E22-3C10CH06DA72 | 10.00 | 10.00 | 22.00 | 30.00 | 72.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.05-0.20 |
| ERC100E22-3W10 | 10.00 | 10.00 | 22.00 | 30.00 | 72.00 | 3 | 38.0 | 5.0 | W | 0.60 | 45.0 | ● | ● | 0.05-0.20 |
| ERC120E25-3C12 | 12.00 | 12.00 | 25.00 | 37.00 | 83.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.07-0.22 |
| ERC120E25-3C12CH06DA83 | 12.00 | 12.00 | 25.00 | 37.00 | 83.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.07-0.22 |
| ERC120E25-3W12 | 12.00 | 12.00 | 25.00 | 37.00 | 83.00 | 3 | 38.0 | 5.0 | W | 0.60 | 45.0 | ● | ● | 0.07-0.22 |
| ERC160E32-3C16 | 16.00 | 16.00 | 32.00 | 44.00 | 92.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.07-0.25 |
| ERC160E32-3C16CH06DA92 | 16.00 | 16.00 | 32.00 | 44.00 | 92.00 | 3 | 38.0 | 5.0 | C | 0.60 | 45.0 | ● | ● | 0.07-0.25 |
| ERC160E32-3W16 | 16.00 | 16.00 | 32.00 | 44.00 | 92.00 | 3 | 38.0 | 5.0 | W | 0.60 | 45.0 | ● | ● | 0.07-0.25 |
| ERC200E38-3C20 | 20.00 | 20.00 | 38.00 | 55.00 | 104.00 | 3 | 38.0 | 5.0 | C | 0.70 | 45.0 | ● | ● | 0.07-0.25 |
| ERC200E38-3W20 | 20.00 | 20.00 | 38.00 | 55.00 | 104.00 | 3 | 38.0 | 5.0 | W | 0.70 | 45.0 | ● | ● | 0.07-0.25 |
| ERC250E45-3C25 | 25.00 | 25.00 | 45.00 | 64.00 | 121.00 | 3 | 38.0 | 5.0 | C | 0.70 | 45.0 | ● | ● | 0.07-0.25 |

- For user guide, see page 103 • Grade IC1508 - DLC Coating
- ⁽¹⁾ Number of flutes
- ⁽²⁾ Maximum ramping angle
- ⁽³⁾ C-Cylindrical, W-Weldon



ECA-B-3

3 Flute, 45° Helix Medium
Length Solid Carbide Endmills
for Machining Aluminum

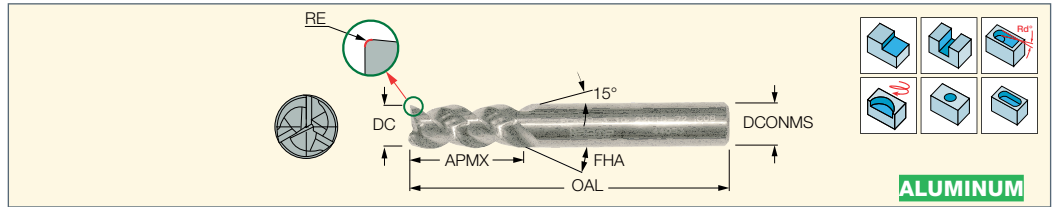

| Designation | Dimensions | | | | | | | | | Tough ← Hard | | Recommended Machining Data f _z (mm/t) |
|---------------------------|------------|--------|-------|--------|--------------------|------|---------------------|----------------------|------|--------------|--------|--|
| | DC | DCONMS | APMX | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | Shank ⁽³⁾ | RE | IC08 | IC1508 | |
| ECA-B-3 04-12C06-57 | 4.00 | 6.00 | 12.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.10 | ● | | 0.02-0.05 |
| ECA-B-3 04-12C06-57 R02D | 4.00 | 6.00 | 12.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.02-0.05 |
| ECA-B-3 04-12W06-57 | 4.00 | 6.00 | 12.00 | 57.00 | 3 | 45.0 | 5.0 | W | 0.10 | ● | | 0.02-0.05 |
| ECA-B-3 05-14C06-57 | 5.00 | 6.00 | 14.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.02-0.06 |
| ECA-B-3 05-14C06-57 R02D | 5.00 | 6.00 | 14.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.02-0.06 |
| ECA-B-3 05-14W06-57 | 5.00 | 6.00 | 14.00 | 57.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.02-0.06 |
| ECA-B-3 06-16C06-57 | 6.00 | 6.00 | 16.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.03-0.07 |
| ECA-B-3 06-16C06-57 R02D | 6.00 | 6.00 | 16.00 | 57.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.03-0.07 |
| ECA-B-3 06-16W06-57 | 6.00 | 6.00 | 16.00 | 57.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.03-0.07 |
| ECA-B-3 08-20C08-63 | 8.00 | 8.00 | 20.00 | 63.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.03-0.09 |
| ECA-B-3 08-20C08-63 R02D | 8.00 | 8.00 | 20.00 | 63.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.03-0.09 |
| ECA-B-3 08-20C08R3-63 | 8.00 | 8.00 | 20.00 | 63.00 | 3 | 45.0 | 5.0 | C | 3.00 | ● | | 0.03-0.09 |
| ECA-B-3 08-20W08-63 | 8.00 | 8.00 | 20.00 | 63.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.03-0.09 |
| ECA-B-3 10-22C10-72 | 10.00 | 10.00 | 22.00 | 72.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.03-0.10 |
| ECA-B-3 10-22C10-72 R02D | 10.00 | 10.00 | 22.00 | 72.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.03-0.10 |
| ECA-B-3 10-22W10-72 | 10.00 | 10.00 | 22.00 | 72.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.03-0.10 |
| ECA-B-3 10-25C10R3-72 | 10.00 | 10.00 | 25.00 | 72.00 | 3 | 45.0 | 5.0 | C | 3.00 | ● | | 0.03-0.10 |
| ECA-B-3 10-25C10R4-72 | 10.00 | 10.00 | 25.00 | 72.00 | 3 | 45.0 | 5.0 | C | 4.00 | ● | | 0.03-0.10 |
| ECA-B-3 12-25C12-83 | 12.00 | 12.00 | 25.00 | 83.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.04-0.11 |
| ECA-B-3 12-25C12-83 R02D | 12.00 | 12.00 | 25.00 | 83.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.04-0.11 |
| ECA-B-3 12-25W12-83 | 12.00 | 12.00 | 25.00 | 83.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.04-0.11 |
| ECA-B-3 12-30C12R3-83 | 12.00 | 12.00 | 30.00 | 83.00 | 3 | 45.0 | 5.0 | C | 3.00 | ● | | 0.04-0.11 |
| ECA-B-3 12-30C12R4-83 | 12.00 | 12.00 | 30.00 | 83.00 | 3 | 45.0 | 5.0 | C | 4.00 | ● | | 0.04-0.11 |
| ECA-B-3 14-30C14-83 | 14.00 | 14.00 | 30.00 | 83.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.04-0.12 |
| ECA-B-3 14-30W14-83 | 14.00 | 14.00 | 30.00 | 83.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.04-0.12 |
| ECA-B-3 16-32C16-92 | 16.00 | 16.00 | 32.00 | 92.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.05-0.13 |
| ECA-B-3 16-32C16-92 R02D | 16.00 | 16.00 | 32.00 | 92.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.05-0.13 |
| ECA-B-3 16-32W16-92 | 16.00 | 16.00 | 32.00 | 92.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.05-0.13 |
| ECA-B-3 20-38C20-104 | 20.00 | 20.00 | 38.00 | 104.00 | 3 | 45.0 | 5.0 | C | 0.20 | ● | | 0.05-0.13 |
| ECA-B-3 20-38C20-104 R02D | 20.00 | 20.00 | 38.00 | 104.00 | 3 | 45.0 | 5.0 | C | 0.20 | | ● | 0.05-0.13 |
| ECA-B-3 20-38W20-104 | 20.00 | 20.00 | 38.00 | 104.00 | 3 | 45.0 | 5.0 | W | 0.20 | ● | | 0.05-0.13 |

• For user guide, see page 103 • Grade IC1508 - DLC Coating


⁽¹⁾ Number of flutes

⁽²⁾ Maximum ramping angle

⁽³⁾ C-Cylindrical, W-Weldon

ECA-B-2

2 Flute, 45° Helix Medium
Length Solid Carbide Endmills
for Machining Aluminum

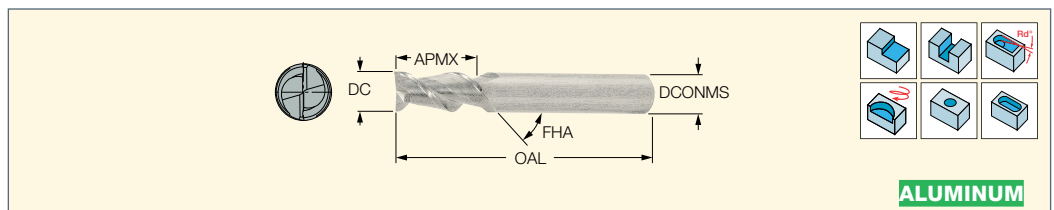

| Designation | Dimensions | | | | | | | | | IC08 | Recommended Machining Data f _z (mm/t) |
|----------------|------------|--------|-------|--------|--------------------|------|---------------------|----------------------|---|-----------|--|
| | DC | DCONMS | APMX | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | Shank ⁽³⁾ | | | |
| ECA040B12-2C06 | 4.00 | 6.00 | 12.00 | 57.00 | 2 | 45.0 | 5.0 | C | ● | 0.02-0.05 | |
| ECA050B14-2C06 | 5.00 | 6.00 | 14.00 | 57.00 | 2 | 45.0 | 5.0 | C | ● | 0.02-0.06 | |
| ECA060B16-2C06 | 6.00 | 6.00 | 16.00 | 57.00 | 2 | 45.0 | 5.0 | C | ● | 0.03-0.07 | |
| ECA080B20-2C08 | 8.00 | 8.00 | 20.00 | 63.00 | 2 | 45.0 | 5.0 | C | ● | 0.03-0.09 | |
| ECA100B22-2C10 | 10.00 | 10.00 | 22.00 | 72.00 | 2 | 45.0 | 5.0 | C | ● | 0.03-0.10 | |
| ECA120B25-2C12 | 12.00 | 12.00 | 25.00 | 83.00 | 2 | 45.0 | 5.0 | C | ● | 0.04-0.11 | |
| ECA160B32-2C16 | 16.00 | 16.00 | 32.00 | 92.00 | 2 | 45.0 | 5.0 | C | ● | 0.05-0.13 | |
| ECA200B38-2C20 | 20.00 | 20.00 | 38.00 | 104.00 | 2 | 45.0 | 5.0 | C | ● | 0.05-0.13 | |

• For user guide, see page 103

⁽¹⁾ Number of flutes

⁽²⁾ Maximum ramping angle


⁽³⁾ C-Cylindrical





ECA-F-2

2 Flute, 55° Helix Medium Length Solid Carbide Endmills for Machining Aluminum

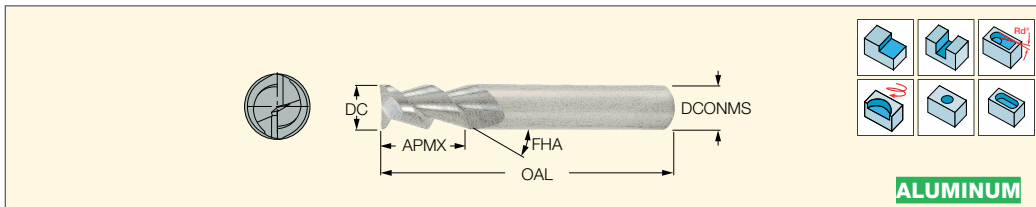

ALUMINUM

| Designation | Dimensions | | | | | | | | IC08 | Recommended Machining Data |
|----------------|------------|--------|-------|--------|--------------------|------|---------------------|----------------------|------|----------------------------|
| | DC | DCONMS | APMX | OAL | NOF ⁽¹⁾ | FHA | RMPX ⁽²⁾ | Shank ⁽³⁾ | | f _z (mm/t) |
| ECA040F11-2C04 | 4.00 | 4.00 | 11.00 | 50.00 | 2 | 55.0 | 5.0 | C | ● | 0.02-0.05 |
| ECA060F13-2C06 | 6.00 | 6.00 | 13.00 | 57.00 | 2 | 55.0 | 5.0 | C | ● | 0.03-0.07 |
| ECA080F20-2C08 | 8.00 | 8.00 | 20.00 | 63.00 | 2 | 55.0 | 5.0 | C | ● | 0.03-0.09 |
| ECA100F22-2C10 | 10.00 | 10.00 | 22.00 | 72.00 | 2 | 55.0 | 5.0 | C | ● | 0.03-0.10 |
| ECA120F25-2C12 | 12.00 | 12.00 | 25.00 | 83.00 | 2 | 55.0 | 5.0 | C | ● | 0.04-0.11 |
| ECA160F32-2C16 | 16.00 | 16.00 | 32.00 | 92.00 | 2 | 55.0 | 5.0 | C | ● | 0.05-0.13 |
| ECA200F38-2C20 | 20.00 | 20.00 | 38.00 | 104.00 | 2 | 55.0 | 5.0 | C | ● | 0.05-0.13 |
| ECA250F45-2C25 | 25.00 | 25.00 | 45.00 | 121.00 | 2 | 55.0 | 5.0 | C | ● | 0.05-0.13 |

• For user guide, see page 103

⁽¹⁾ Number of flutes


⁽²⁾ Maximum ramping angle

⁽³⁾ C-Cylindrical



EBA-B2

2 Flute High Precision Solid Carbide Ball Nose Endmills for Machining Aluminum

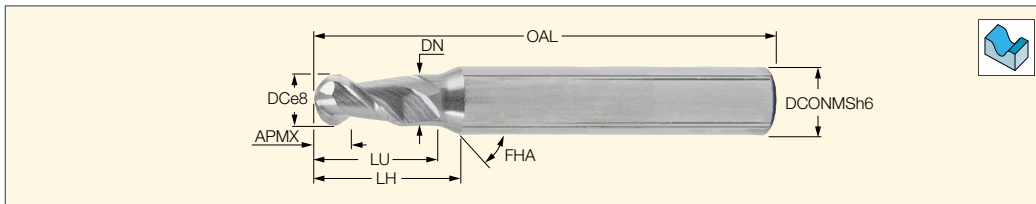

| Designation | Dimensions | | | | | | | | | | | IC08 | |
|------------------------|------------|--------|------|-------|------|------|------|--------------------|------|----------------------|-----------------------|-------|-----------------------|
| | DC | DCONMS | APMX | OAL | LU | LH | DN | NOF ⁽¹⁾ | FHA | Shank ⁽²⁾ | RETOLL ⁽³⁾ | | RETOLU ⁽⁴⁾ |
| EBA-B2 010-010/02C6-57 | 1.00 | 6.00 | 1.00 | 57.00 | 2.0 | 12.0 | 0.95 | 2 | 45.0 | C | 0.000 | 0.004 | ● |
| EBA-B2 020-020/04C6-57 | 2.00 | 6.00 | 2.00 | 57.00 | 4.0 | 12.0 | 1.80 | 2 | 45.0 | C | 0.000 | 0.005 | ● |
| EBA-B2 030-030/06C6-57 | 3.00 | 6.00 | 3.00 | 57.00 | 6.0 | 12.0 | 2.70 | 2 | 45.0 | C | -0.010 | 0.010 | ● |
| EBA-B2 040-040/08C6-57 | 4.00 | 6.00 | 4.00 | 57.00 | 8.0 | 12.0 | 3.70 | 2 | 45.0 | C | -0.010 | 0.010 | ● |
| EBA-B2 050-050/10C6-57 | 5.00 | 6.00 | 5.00 | 57.00 | 10.0 | 12.0 | 4.70 | 2 | 45.0 | C | -0.010 | 0.010 | ● |
| EBA-B2 060-060/12C6-57 | 6.00 | 6.00 | 6.00 | 57.00 | 12.0 | 13.0 | 5.50 | 2 | 45.0 | C | -0.010 | 0.010 | ● |

• For user guide, see page 103

⁽¹⁾ Number of flutes

⁽²⁾ C-Cylindrical

⁽³⁾ Corner radius tolerance lower


⁽⁴⁾ Corner radius tolerance upper




Finishing

| N (Non-Ferrous Metals) | |
|------------------------|--|
| Tool Type | Features |
| ECA-H3-CF | <ul style="list-style-type: none"> suitable for roughing and finishing operations CHATTERFREE full slot up to 1.5XDC and 2XDC * excellent solution for low power machines |
| ECA-H3-CF-C | <ul style="list-style-type: none"> suitable for roughing and finishing operations CHATTERFREE full slot up to 2XDC internal coolant for better chip evacuation in deep cavity |
| ECAP-H3-CF | <ul style="list-style-type: none"> suitable for roughing chip splitter CHATTERFREE internal coolant for better chip evacuation in deep cavity |
| ECA-H4-CF | <ul style="list-style-type: none"> suitable for roughing and finishing operations CHATTERFREE full slot up to 1XDC |
| ECA-B-3 | <ul style="list-style-type: none"> suitable for roughing and finishing operations excellent surface finish |
| ECR-B3-R | <ul style="list-style-type: none"> suitable for roughing good cheap evacuation |


D 2x ROUGH: AE = 40% - Full Cut , A_p = 1.5xDC*

| Material Group Parameters | Alu Wrought Alloy | Alu Cast Alloy | Copper Alloy | Electrolitic Copper | Non-Metallic |  |
|---------------------------------|-------------------|----------------|--------------|---------------------|--------------|--|
| | 21-22 | 23-25 | 26-27 | 28 | 29-30 | |
| V _c (IC08) (m/min) | 700-760 | 400-550 | 500-520 | 350-360 | 350-360 | |
| F _z (Ø6-8) (mm/t) | 0.02-0.04 | 0.02-0.04 | 0.02-0.04 | 0.02-0.04 | 0.02-0.04 | |
| F _z (Ø10-12) (mm/t) | 0.03-0.05 | 0.03-0.05 | 0.03-0.05 | 0.03-0.05 | 0.03-0.05 | |
| F _z (Ø 16-20) (mm/t) | 0.03-0.07 | 0.03-0.07 | 0.03-0.07 | 0.03-0.07 | 0.03-0.07 | |

SEMI-FINISH: AE = 10% - 40%, A_p = 2 x DC

| Material Group Parameters | Alu Wrought Alloy | Alu Cast Alloy | Copper Alloy | Electrolitic Copper | Non-Metallic |  |
|---------------------------------|-------------------|----------------|--------------|---------------------|--------------|---|
| | 21-22 | 23-25 | 26-27 | 28 | 29-30 | |
| V _c (IC08) (m/min) | 760-840 | 550-700 | 520-530 | 360-370 | 360-370 | |
| F _z (Ø6-8) (mm/t) | 0.04-0.06 | 0.04-0.06 | 0.03-0.05 | 0.03-0.05 | 0.03-0.05 | |
| F _z (Ø 10-12) (mm/t) | 0.06-0.08 | 0.06-0.08 | 0.045-0.055 | 0.045-0.055 | 0.045-0.055 | |
| F _z (Ø 16-20) (mm/t) | 0.08-0.1 | 0.08-0.1 | 0.055-0.07 | 0.055-0.07 | 0.055-0.07 | |

FINISH / H.S.M: AE = 5% - 10%, A_p = Max. Cutting Length


| Material Group Parameters | Alu Wrought Alloy | Alu Cast Alloy | Copper Alloy | Electrolitic Copper | Non-Metallic |  |
|--------------------------------|-------------------|----------------|--------------|---------------------|--------------|---|
| | 21-22 | 23-25 | 26-27 | 28 | 29-30 | |
| V _c (IC08) (m/min) | 840-900 | 700-900 | 530-550 | 370-380 | 370-380 | |
| F _z (Ø6-8) (mm/t) | 0.045-0.07 | 0.045-0.07 | 0.035-0.06 | 0.035-0.06 | 0.035-0.06 | |
| F _z (Ø10-12) (mm/t) | 0.07-0.1 | 0.07-0.1 | 0.06-0.07 | 0.06-0.07 | 0.06-0.07 | |
| F _z (Ø16-20) (mm/t) | 0.1-0.15 | 0.1-0.15 | 0.065-0.08 | 0.065-0.08 | 0.065-0.08 | |

PCD Endmills



SEHFD

PCD Endmills for Machining Aluminum, CFRP, Graphite, Specifically for Roughing and Finishing Applications

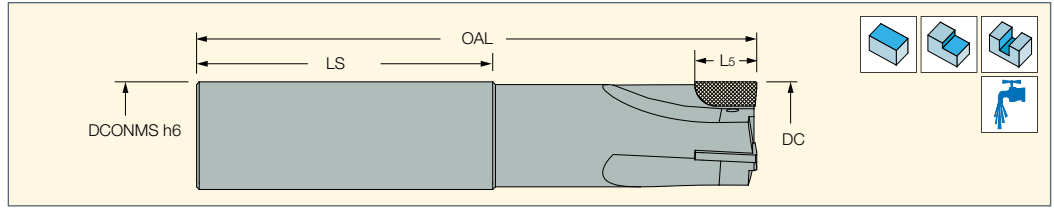

| Designation | | DC | DCONMS | OAL | LS | L5 |
|----------------------|---|-------|--------|-------|------|-------|
| SEHFD10Z03CM10L10R02 | L | 10.00 | 10.00 | 72.00 | 44.0 | 10.00 |
| SEHFD12Z03CM12L10R02 | L | 12.00 | 12.00 | 83.00 | 50.0 | 10.00 |
| SEHFD16Z03CM16L10R02 | L | 16.00 | 16.00 | 92.00 | 53.0 | 10.00 |

RECOMMENDED CUTTING PARAMETERS FOR ENDMILLS

The below cutting datas are purely an indication and are calculated assuming optimal working conditions; they can depend on stability of the fixture, the machine and the workpiece.


For more detailed information and for choosing the best grade, you should contact **ISCAR PCD's** offices.

| Material | Grade | V _c (m/min) | F _z (mm/z)* | Axial Depth Of Cut (a _p) |
|--|-------|------------------------|------------------------|--------------------------------------|
| Aluminum Alloys (Si <4%) | PCD | ≤5000 | 0.05÷0.2 | 0.1÷5.0 |
| Aluminum Alloys (Si 4-8%) | PCD | ≤4000 | 0.05÷0.2 | 0.1÷5.0 |
| Aluminum Alloys (Si 9-12%) | PCD | ≤4000 | 0.05÷0.2 | 0.1÷5.0 |
| Aluminum Alloys (Si>12%) | PCD | ≤3000 | 0.03÷0.15 | 0.1÷3.0 |
| Copper, Bronze, Brass, Zinc and Magnesium Alloys | PCD | ≤5000 | 0.05÷0.3 | 0.1÷4.0 |
| Graphite | PCD | ≤2500 | 0.05÷0.2 | 0.1÷3.0 |
| Gfk-Cfk | PCD | ≤4000 | 0.08÷1.0 | 0.1÷5.0 |

* f_z value is strongly influenced by V_c and a_p combined together




Holemaking

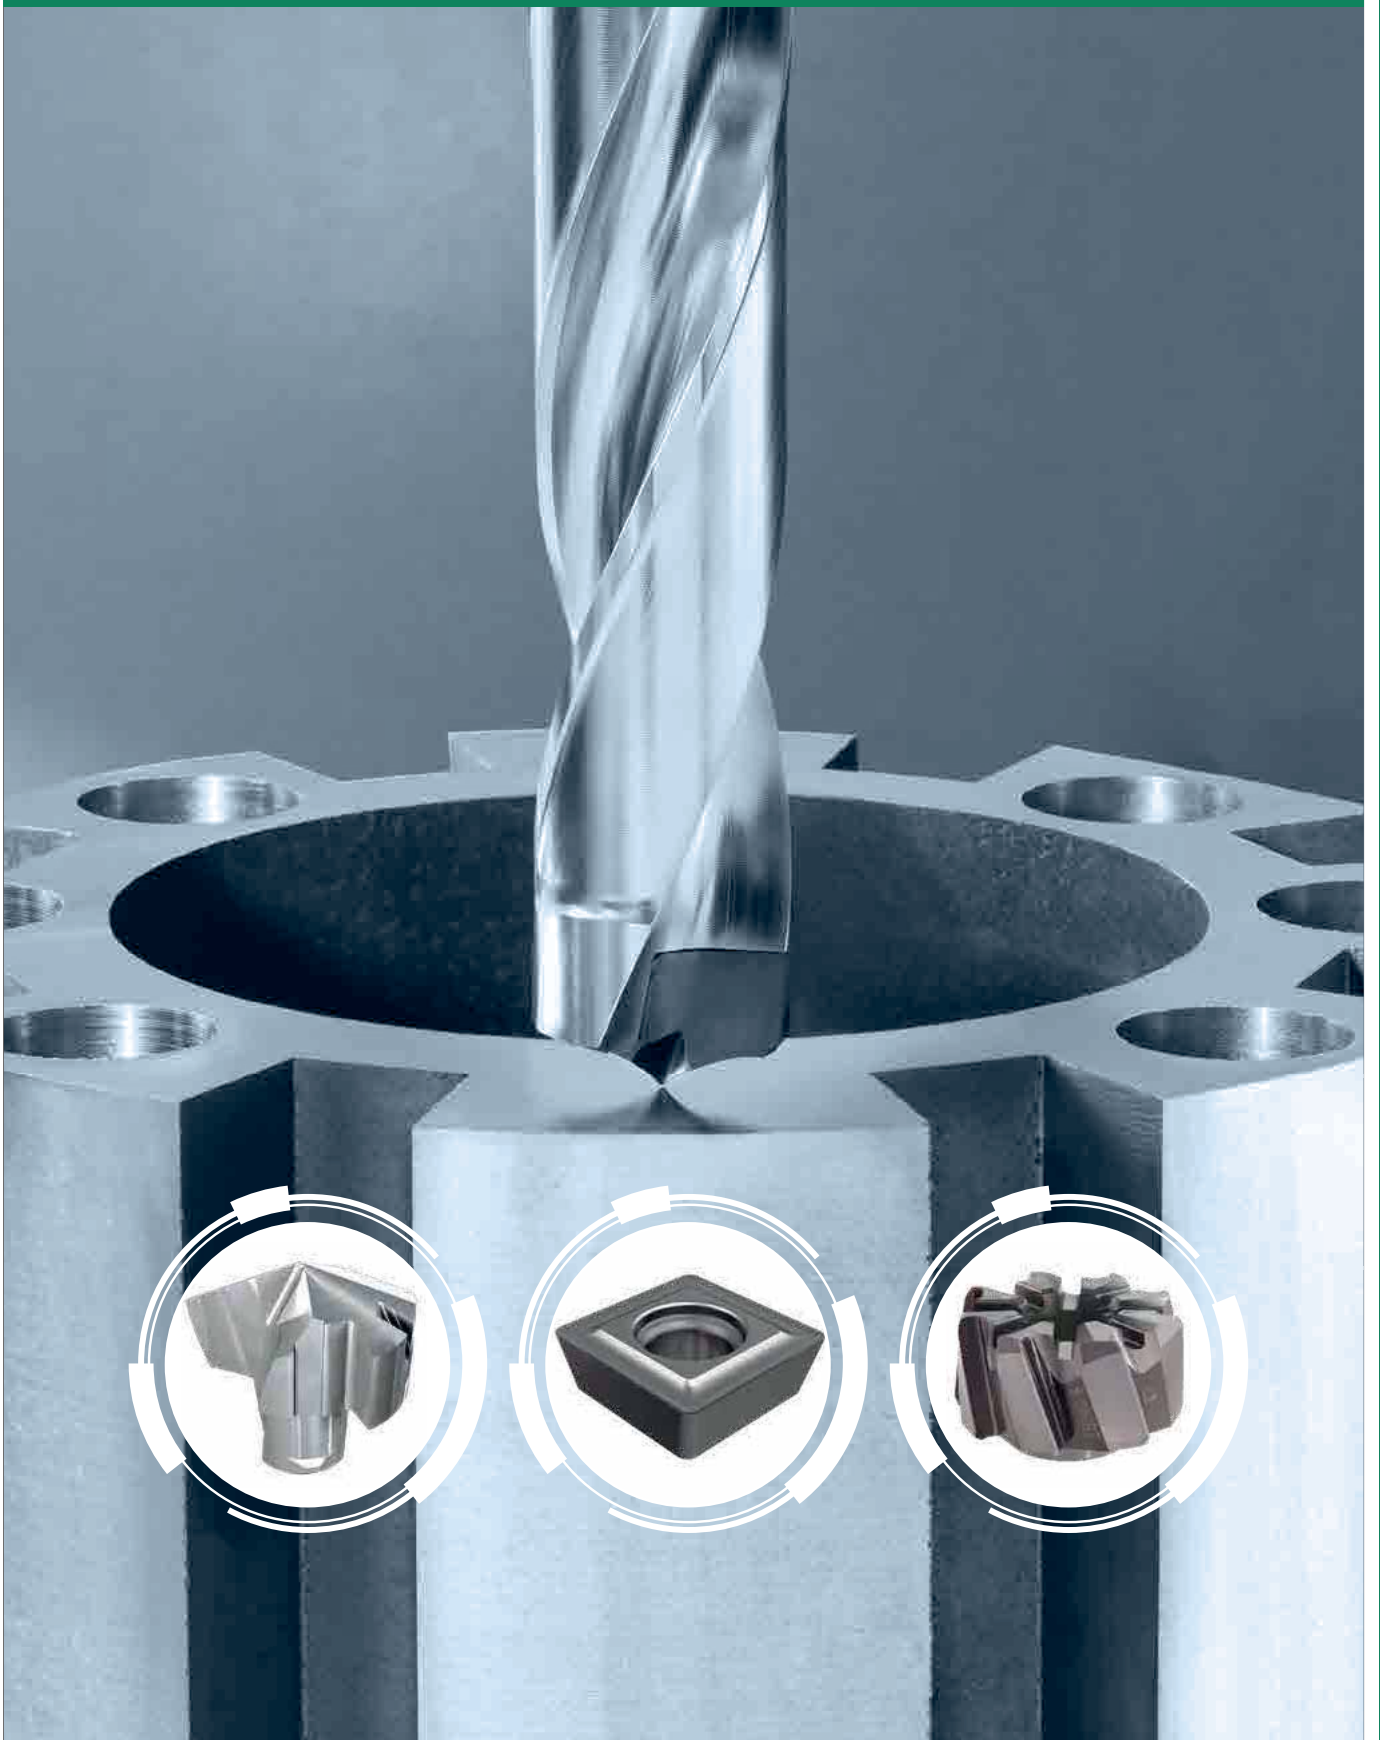

Exchangeable Drilling Heads

SUMOCHAM
CHAMDRILL LINE

ICN
Exchangeable SUMOCHAM
Drilling Heads for Machining
ISO N Materials

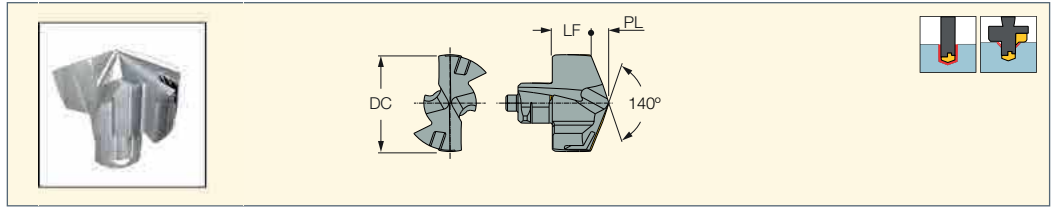

| Designation | Dimensions | | | | | | IC08 |
|-------------|------------|-------|-------|-----|--------------------|---|------|
| | DC | PL | LF | SIG | SSC ⁽¹⁾ | | |
| ICN 0476 | 4.76 | 0.710 | 2.84 | 140 | 4.0 | ● | |
| ICN 051 | 5.10 | 0.680 | 3.02 | 140 | 5.0 | ● | |
| ICN 054 | 5.40 | 0.730 | 2.97 | 140 | 5.0 | ● | |
| ICN 0635 | 6.35 | 1.020 | 2.98 | 140 | 6.0 | ● | |
| ICN 0794 | 7.94 | 1.180 | 3.42 | 140 | 7.0 | ● | |
| ICN 0952 | 9.52 | 1.440 | 4.36 | 140 | 9.0 | ● | |
| ICN 100 | 10.00 | 1.500 | 4.70 | 140 | 10.0 | ● | |
| ICN 102 | 10.20 | 1.540 | 4.66 | 140 | 10.0 | ● | |
| ICN 103 | 10.30 | 1.550 | 4.65 | 140 | 10.0 | ● | |
| ICN 105 | 10.50 | 1.590 | 4.61 | 140 | 10.0 | ● | |
| ICN 107 | 10.70 | 1.630 | 4.57 | 140 | 10.0 | ● | |
| ICN 108 | 10.80 | 1.650 | 4.55 | 140 | 10.0 | ● | |
| ICN 110 | 11.00 | 1.670 | 4.93 | 140 | 11.0 | ● | |
| ICN 111 | 11.10 | 1.690 | 4.91 | 140 | 11.0 | ● | |
| ICN 115 | 11.50 | 1.760 | 4.84 | 140 | 11.0 | ● | |
| ICN 119 | 11.90 | 1.830 | 4.77 | 140 | 11.0 | ● | |
| ICN 120 | 12.00 | 1.820 | 5.18 | 140 | 12.0 | ● | |
| ICN 123 | 12.30 | 1.870 | 5.13 | 140 | 12.0 | ● | |
| ICN 125 | 12.50 | 1.910 | 5.09 | 140 | 12.0 | ● | |
| ICN 127 | 12.70 | 1.950 | 5.05 | 140 | 12.0 | ● | |
| ICN 130 | 13.00 | 1.960 | 5.64 | 140 | 13.0 | ● | |
| ICN 135 | 13.50 | 2.050 | 5.55 | 140 | 13.0 | ● | |
| ICN 137 | 13.70 | 2.090 | 5.51 | 140 | 13.0 | ● | |
| ICN 140 | 14.00 | 2.120 | 6.03 | 140 | 14.0 | ● | |
| ICN 141 | 14.10 | 2.140 | 6.01 | 140 | 14.0 | ● | |
| ICN 142 | 14.20 | 2.160 | 5.99 | 140 | 14.0 | ● | |
| ICN 1427 | 14.27 | 2.170 | 5.98 | 140 | 14.0 | ● | |
| ICN 145 | 14.50 | 2.210 | 5.94 | 140 | 14.0 | ● | |
| ICN 147 | 14.70 | 2.250 | 5.90 | 140 | 14.0 | ● | |
| ICN 150 | 15.00 | 2.270 | 6.46 | 140 | 15.0 | ● | |
| ICN 157 | 15.70 | 2.400 | 6.33 | 140 | 15.0 | ● | |
| ICN 158 | 15.80 | 2.420 | 6.31 | 140 | 15.0 | ● | |
| ICN 1587 | 15.87 | 2.43 | 6.30 | 140 | 15.0 | ● | |
| ICN 1588 | 15.88 | 2.43 | 6.30 | 140 | 15.0 | ● | |
| ICN 160 | 16.00 | 2.420 | 6.88 | 140 | 16.0 | ● | |
| ICN 165 | 16.50 | 2.510 | 6.79 | 140 | 16.0 | ● | |
| ICN 167 | 16.70 | 2.550 | 6.75 | 140 | 16.0 | ● | |
| ICN 170 | 17.00 | 2.590 | 7.31 | 140 | 17.0 | ● | |
| ICN 175 | 17.50 | 2.680 | 7.22 | 140 | 17.0 | ● | |
| ICN 180 | 18.00 | 2.730 | 7.77 | 140 | 18.0 | ● | |
| ICN 185 | 18.50 | 2.820 | 7.68 | 140 | 18.0 | ● | |
| ICN 190 | 19.00 | 2.880 | 8.12 | 140 | 19.0 | ● | |
| ICN 1905 | 19.05 | 2.890 | 8.11 | 140 | 19.0 | ● | |
| ICN 195 | 19.50 | 2.970 | 8.03 | 140 | 19.0 | ● | |
| ICN 2062 | 20.62 | 3.130 | 8.47 | 140 | 20.0 | ● | |
| ICN 2222 | 22.22 | 3.360 | 9.40 | 140 | 22.0 | ● | |
| ICN 234 | 23.40 | 3.530 | 9.80 | 140 | 23.0 | ● | |
| ICN 250 | 25.00 | 3.800 | 10.70 | 140 | 25.0 | ● | |
| ICN 254 | 25.40 | 3.870 | 10.63 | 140 | 25.0 | ● | |
| ICN 2857 | 28.57 | 4.350 | 11.87 | 140 | 28.0 | ● | |
| ICN 3175 | 31.75 | 4.900 | 13.06 | 140 | 31.0 | ● | |



• The drill is manufactured with a sharp cutting edge and polished flutes • For cutting conditions see pages 107-110

⁽¹⁾ Seat size code



Scan the QR code for additional information.
Enter the item description in the search field to access additional related data.


- Following is the recommended coolant flow rate and pressure.

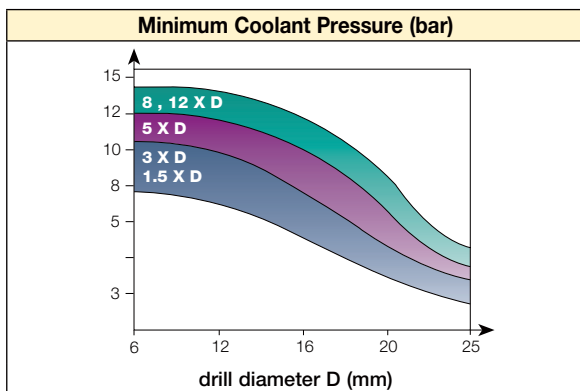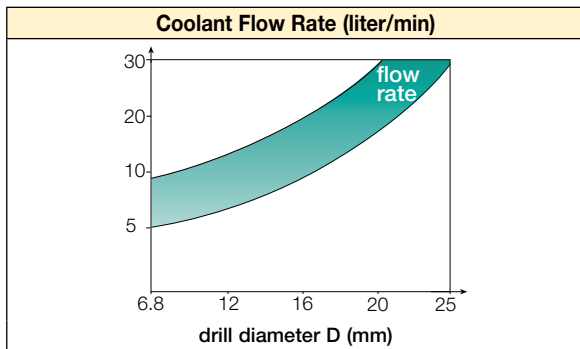


- For optimal performance, it is recommended to adjust runout of outer points or chisel with a maximum of 0.02 mm. Large runout will influence drill performance tool life and hole quality.
- No setup time is needed after indexing the **SUMOCHAM** drill head.
- **SUMOCHAM** drills can be used either on milling centers or lathe machines.
- When using **SUMOCHAM** drill in stationary (lathe) applications, we recommend using the **ISCAR GYRO** device or eccentric sleeve to reduce misalignment. Misalignment will cause poor performance of the **SUMOCHAM** drill or even tool breakage.

- Prior to using 8D or 12D drills, it is recommended to drill a 1.5xD pre-hole using a short tool assembled with same drilling head as for further operation
- Enter the pre-hole at slow speed and feed until 2-5 mm from its bottom. Start the cooling system and increase rotation to the recommended drilling speed. Hold for 2-3 seconds, then continue at the recommended drilling feed.


1 Pre-hole for a 1.5xD depth for piloting.




2 Enter the pre-hole at slow speed and feed until 2-5 mm from its bottom.

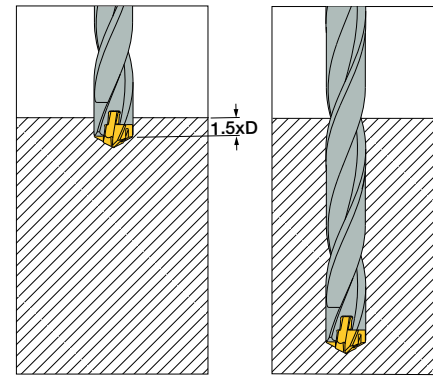


3 Start the cooling system and increase rotation to the recommended drilling speed.




4 Hold for 2-3 seconds, then continue at the recommended drilling feed.

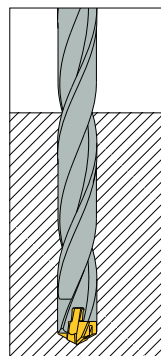


Drilling Head Mounting Procedure

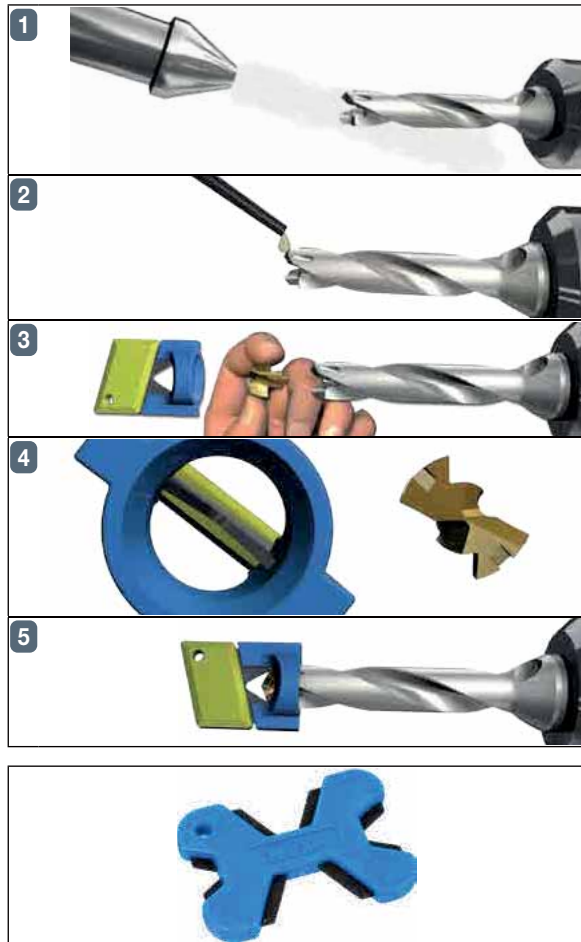

Coolant Recommendations

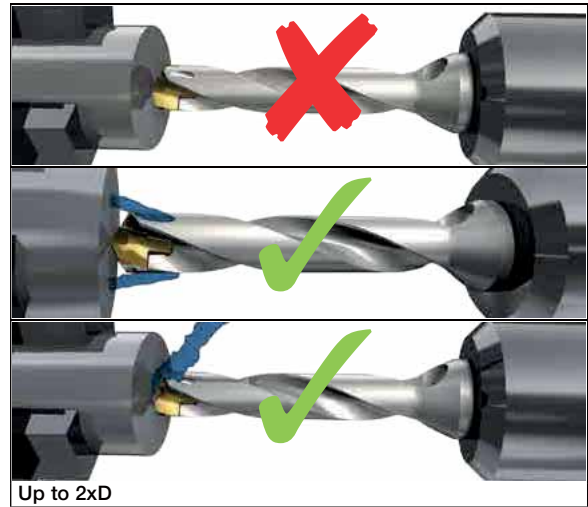

Maximum Runout, Misalignment

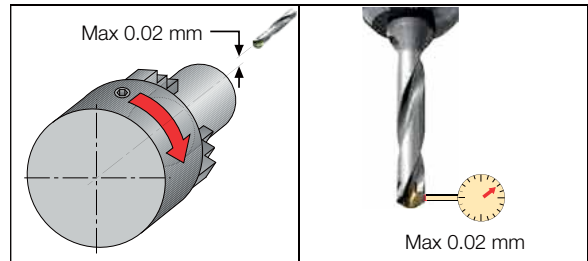


K DCN MULTI

The optional K DCN MULTI key enables clamping all currently available **SUMOCHAM** drilling heads in a 6-26.9 mm diameter range.

Indication of Drill Head Wear


Wear Limit

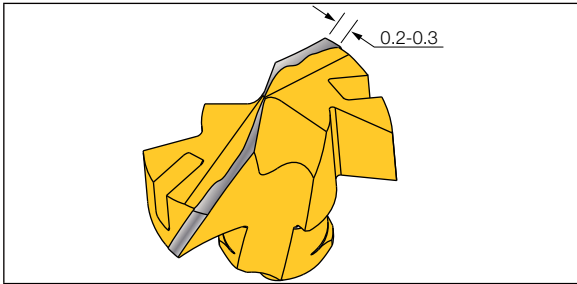

Vibration Noise Drastically Increases




Power Restriction

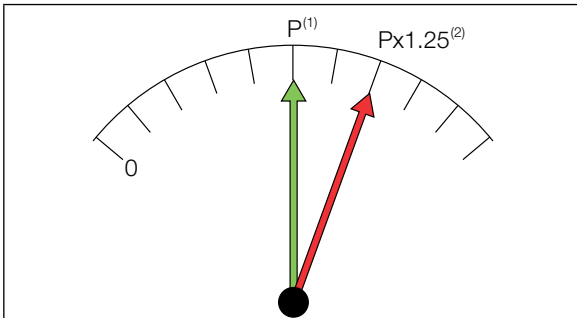

(1) New drilling head
(2) Worn-out drilling head

Drilling Limitations

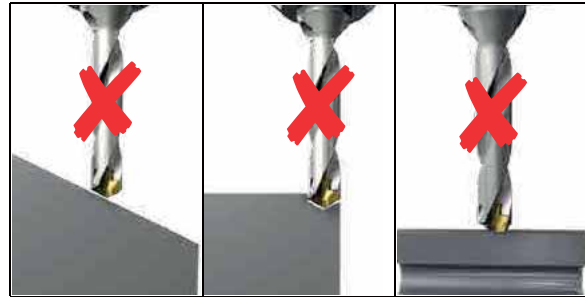

| Diameter Change | Surface Finish Declines |
|---|-------------------------|
| $\varnothing > D \text{ nominal} + 0.15 \text{ mm}$ $D \text{ nominal}$ $\varnothing < D \text{ nominal} - 0.03 \text{ mm}$ | R_a |
| | |

Recommended Machining Conditions for ICN Inserts

| | | SUMOCHAM | | | | | |
|----------|------------|-------------------------|---------|----------|----------|-----------|-----------|
| | | Feed Vs. Drill Diameter | | | | | |
| Mtl. No. | V m/min | D=4-4.9 | D=5-5.9 | D=6-7.99 | D=8-9.99 | D=20-25.9 | D=26-32.9 |
| | | mm/rev | | | | | |
| 21 | 90-155-220 | | | | | | |
| 22 | | | | | | | |
| 23 | | | | | | | |
| 24 | 80-120-160 | 0.04 | 0.10 | 0.12 | 0.20 | 0.45 | 0.50 |
| 25 | | 0.06 | 0.13 | 0.15 | 0.27 | 0.57 | 0.67 |
| 26 | 90-155-220 | 0.08 | 0.15 | 0.18 | 0.35 | 0.70 | 0.75 |
| 27 | | | | | | | |
| 28 | | | | | | | |

Recommended cutting data
 According to the wear results, conditions can be changed to optimize performance
 * For small diameters (4-5.99), reduce cutting speed by 20%
 * When using more than 5xD drill ratio, reduce cutting parameters by 10%

Troubleshooting


| | |
|---|--|
|  | <p>Cutting Edge Chipping</p> <ol style="list-style-type: none"> 1 Check the stability of the machine spindle, tool and workpiece clamping rigidity. 2 Reduce feed rate, increase speed. 3 If the drill vibrates, reduce cutting speed and increase feed rate. 4 When drilling rough, hard or sloped surfaces (up to 7°), reduce the feed rate by 30-50% when entering and exiting. 5 Check cooling lubricant and increase coolant pressure. In case of external coolant supply, improve jet direction and add cooling jets. |
|  | <p>Chisel Area Chipping</p> <ol style="list-style-type: none"> 1 Reduce feed rate. 2 Increase coolant pressure. 3 Check the adaptation. Use hydraulic clamping chuck, MAXIN power chuck or side lock systems. 4 Increase workpiece chucking force. |
|  | <p>Excessive Flank Wear</p> <ol style="list-style-type: none"> 1 Reduce cutting speed. 2 Increase internal coolant pressure. |
|  | <p>Excessive Flute Land Wear</p> <ol style="list-style-type: none"> 1 Check the runout and make sure it is within 0.02 mm T.I.R. (radial and axial). 2 Reduce cutting speed. 3 When drilling rough, hard or sloped surfaces (up to 7°), reduce the feed rate by 30-50% when entering and exiting. 4 Increase coolant pressure. 5 Check the chisel point runout and make sure it is within 0.02 mm T.I.R. 6 Increase workpiece chucking force stability and rigidity. 7 If there is low pocket gripping force - replace drill body. |
|  | <p>Built-Up Edge</p> <ol style="list-style-type: none"> 1 Increase cutting speed/feed. 2 Increase coolant pressure. |
|  | <p>Deviation of Hole Tolerance</p> <ol style="list-style-type: none"> 1 Check the runout and make sure it is within 0.02 mm T.I.R. (radial and axial cutting points). 2 Reduce feed rate. 3 Check the chisel point runout and make sure that it is within 0.02 mm T.I.R. 4 Wrong cutting edge. Replace head. 5 Increase workpiece chucking force. 6 Check the adaptation. Use hydraulic clamping chuck, MAXIN power chuck or side clamping systems. 7 Increase internal coolant pressure. |
|  | <p>Surface Finish Too Rough</p> <ol style="list-style-type: none"> 1 Check the runout and make sure it is within 0.02 mm T.I.R. (radial and axial). 2 Adjust the feed for improved chip formation. 3 In case of chip jamming - increase the coolant flow and/or reduce the cutting speed. 4 Increase the coolant pressure. 5 Check the chisel point runout and make sure it is within 0.02 mm T.I.R. 6 Use pecking cycle. |
|  | <p>Hole Not Straight:</p> <ol style="list-style-type: none"> 1 Drill a pre-hole for centering by short tool. 2 Increase coolant pressure, improve jet direction in case of external coolant supply. 3 Increase the feed. |
|  | <p>Inaccurate Hole Position</p> <ol style="list-style-type: none"> 1 Check the runout and make sure it is within 0.02 mm T.I.R. (radial and axial). 2 Check the stability of the machine spindle, tool and workpiece clamping rigidity. 3 When drilling rough, hard or sloped surfaces (up to 7°), reduce the feed rate by 30%-50% when entering. 4 Drill a pre-hole with a 140° point angle for centering. 5 Check the chisel point runout and make sure it is within 0.02 mm T.I.R. |
|  | <p>Burrs on Exit</p> <ol style="list-style-type: none"> 1 Reduce the feed rate by 30%-50% when exiting. 2 Replace the worn head. 3 Check the adaptation. Use hydraulic clamping chuck, MAXIN power chuck or side clamping systems. |

Indexable Drilling Insert

DR-TWIST
INDEXABLE DRILL LINE

SOGX/T-AL

DR Drill Inserts for Aluminum

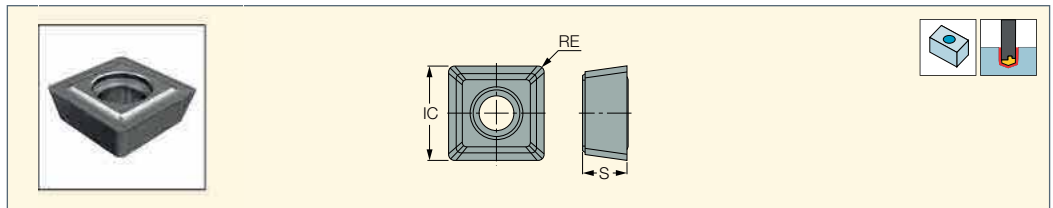


| Designation | Dimensions | | | IC08 |
|----------------|------------|------|------|------|
| | IC | S | RE | |
| SOGX 050204-AL | 5.40 | 2.40 | 0.40 | ● |
| SOGX 060304-AL | 6.20 | 3.20 | 0.40 | ● |
| SOGX 070305-AL | 7.70 | 3.60 | 0.50 | ● |
| SOGT 09T306-AL | 9.00 | 3.81 | 0.60 | ● |
| SOGT 120408-AL | 12.70 | 4.76 | 0.80 | ● |

- Sharp cutting edge with polished rake for aluminum
- For user guide and cutting conditions, see pages 112-117

DR-TWIST
INDEXABLE DRILL LINE

AOGT

Inserts for DR Drills

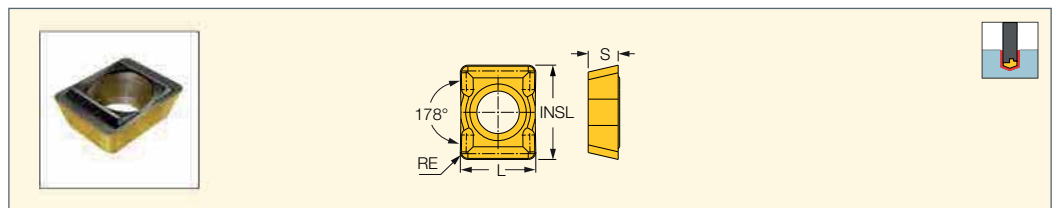

| Designation | Dimensions | | | | IC08 |
|------------------|------------|------|------|------|------|
| | L | S | RE | INSL | |
| AOGT 040204-90AL | 4.00 | 1.60 | 0.40 | 5.00 | ● |




- Used on 12-13.5 mm DR drills
- For user guide and cutting conditions, see pages 112-117




Machining Conditions

Cooling Methods

Directing the coolant through the tool is essential for reliable machining. This method prevents chip pile up, insert damage or breakage, and damage to the workpiece surface.
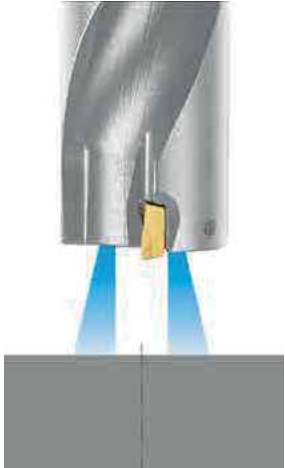
| Internal Coolant | External Coolant |
|---|---|
|  |  |
| Apply standard cutting data. | Drilling depth is limited to 1.5xD. For larger depths, a pecking cycle is recommended.  |

Rotating Drills

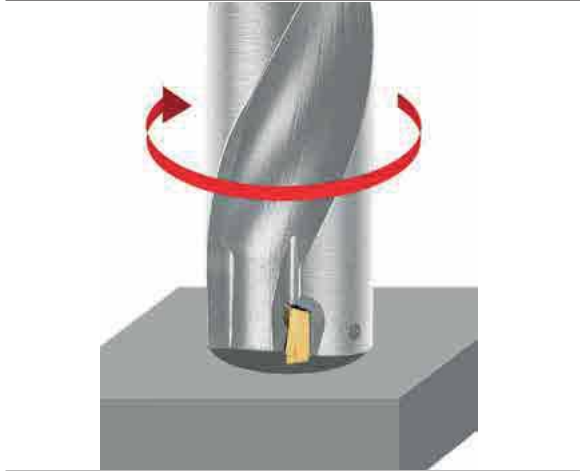

For Best Results

- 1 Check adapter rigidity.
- 2 Minimize drill runout in relation to spindle center line.
- 3 Use recommended cutting conditions.

Optimizing Chip Shape

Chip control is one of the most important factors for tool performance in order to facilitate chip evacuation and avoid tool damage.


Cutting conditions must be adjusted to achieve optimal chip shape.

| How to Achieve Optimal Chip Shape | |
|---|---|
| <p>too tight increase speed within recommended limits. if not satisfactory, decrease feed.</p> | <p>→ optimal shape ←</p> |
| | <p>too long if machining at high speed, first reduce speed. if unsatisfactory, increase feed, but do not exceed upper limit.</p> |

Setup of Non-Rotating Drills


Drill Positioning on Turret Lathe

The peripheral insert cutting edge should be parallel to the machine X-axis.

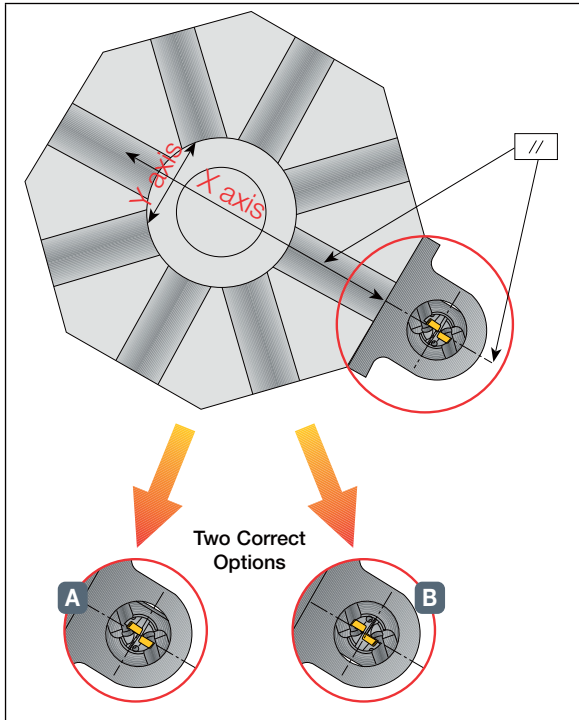

The drill can be mounted on the X-axis or on a 180° rotation.

For better chip evacuation it is recommended to apply option **A** peripheral insert position.

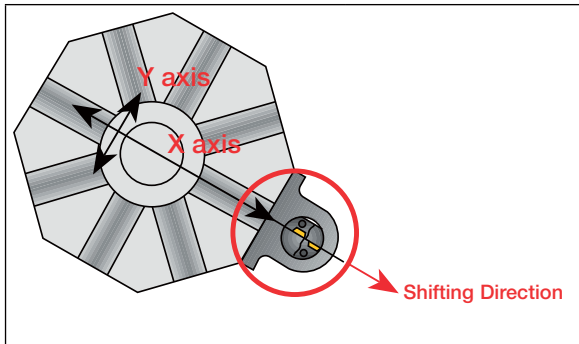

Change hole diameter by shifting drill's center along lathe x-axis.

Diameter Change by Center Shift

| DR-06 | |
|-----------|-----------------|
| D Nominal | D Max. on Lathe |
| 16 | 19.5 |
| 17 | 20.0 |
| 18 | 20.5 |
| 19 | 21.0 |
| 20 | 21.5 |
| 21 | 22.0 |
| 22 | 23.0 |

| DR-09 | |
|-----------|-----------------|
| D Nominal | D Max. on Lathe |
| 23 | 28.5 |
| 24 | 29.0 |
| 25 | 29.5 |
| 26 | 30.0 |
| 27 | 30.5 |
| 28 | 31.0 |
| 29 | 31.5 |
| 30 | 32.0 |
| 31 | 32.5 |
| 32 | 33.3 |
| 33 | 34.0 |
| 34 | 34.5 |
| 35 | 35.0 |



| DR-12 | |
|-----------|-----------------|
| D Nominal | D Max. on Lathe |
| 34 | 39.5 |
| 35 | 40.0 |
| 36 | 40.5 |
| 37 | 41.0 |
| 38 | 41.5 |
| 39 | 42.0 |
| 40 | 42.5 |
| 41 | 43.0 |
| 42 | 43.5 |
| 43 | 44.0 |
| 44 | 44.5 |
| 45 | 51.0 |
| 46 | 51.5 |
| 47 | 52.0 |
| 48 | 52.5 |
| 49 | 53.0 |
| 50 | 54.0 |
| 51 | 54.5 |
| 52 | 55.0 |
| 53 | 55.5 |
| 54 | 56.0 |
| 55 | 56.5 |
| 56 | 57.0 |
| 57 | 57.5 |
| 58 | 58.0 |
| 59 | 59.0 |
| 60 | 60.0 |

Applicable only when using SOMT inserts

Setup of Non-Rotating Drills

Machining Conditions


Optimizing Chip Shape for DR Drills

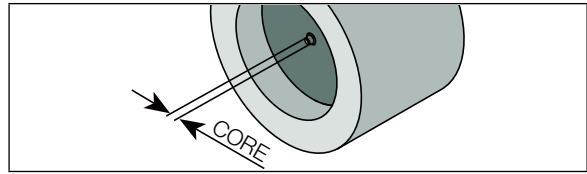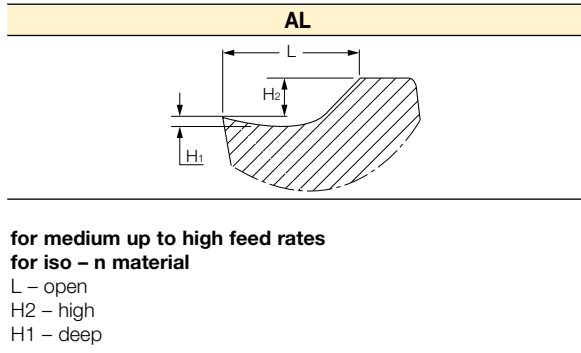

- 1 Drill a hole 6 mm deep with the drill center line aligned with the spindle center line.
- 2 Check the existing core. If there is no core, check the alignment of the Y-axis of the drill and spindle. Correct by checking the adapter or adjusting the Y-axis.
- 3 Check that the hole diameter equals the drill diameter +0.0- +0.2 mm. If not, adjust the X-axis.
- 4 Note: In some operations, part of the core may break. If this occurs, use finger contact to verify if any core remains

Make Sure the Center Line of the Drill Is Aligned with the Spindle Center Line. It Is Recommended to Verify the Setup According to the Instructions Shown Below.

DR-06

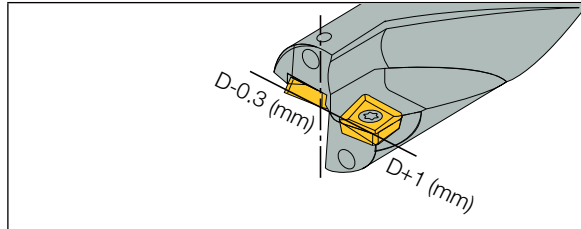

Under regular conditions it is possible to adjust the center line of the drill (X-axis of the machine) in order to change hole diameter size.

Warning: As the drill goes all the way through a workpiece, it ejects a disc. For worker safety, guards should be used.


Cutting Conditions

| ISO | Material | Condition | Hardness HB | Group No. ⁽¹⁾ | Mat. No. | Cutting Speed | | Feed Vs. Drill Diameter mm/rev | | | | | |
|---------------|-------------------------|------------------------------|--------------|--------------------------|----------|----------------------|-----------|--------------------------------|-----------|-----------|-----------|----------|----|
| | | | | | | V _c m/min | DR-04 | DR-05 | DR-06 | DR-07 | DR-09/10 | DR-11/12 | |
| | | | | | | | AL | AL | AL | AL | AL | AL | |
| N | aluminum-wrought alloys | not hardenable | 60 | 21 | 21 | 150-300 | 0.08-0.24 | 0.12-0.25 | 0.12-0.25 | 0.12-0.25 | 0.20-0.30 | 0.2-0.35 | |
| | | hardenable | 100 | 22 | 22 | | | | | | | | |
| | aluminum-cast alloys | ≤12% Si not hardenable | 75 | 23 | 23 | | | | | | | | |
| | | hardenable | 90 | 24 | 24 | | | | | | | | |
| | >12% Si | high temperature | 130 | 25 | 25 | | | | | | | | |
| | | >1% Pb | free cutting | 110 | 26 | | | | | | | | 26 |
| copper alloys | brass | 90 | 27 | 27 | | | | | | | | | |
| | electrolytic copper | 100 | 28 | 28 | | | | | | | | | |
| | non metallic | duroplastics, fiber plastics | 70 shore D | 29 | 29 | | | | | | | | |
| hard rubber | | 55 shore D | 30 | 30 | | | | | | | | | |

• When using external coolant supply only, reduce cutting speed by 10%
• This table refers to 2/3xD drill lengths • For 4xD and 5xD drills, decrease cutting data by 15%

Machining Conditions

Machine Power and Feed Force Requirements

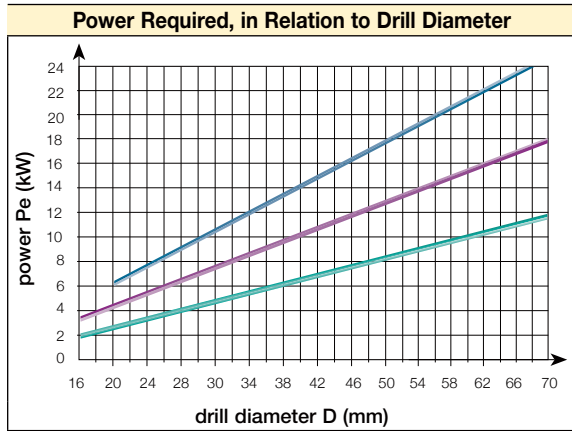

- f=0.25
- f=0.18
- f=0.1


Machine Power

$$P = \frac{P_e \cdot C}{\eta}$$

| V _c [m/min] | 100 | 150 | 200 |
|------------------------|-----|-----|-----|
| C | 1.0 | 1.5 | 2.0 |

η=machine efficiency


Feed Force (thrust Force) Required, in Relation to Drill Diameter

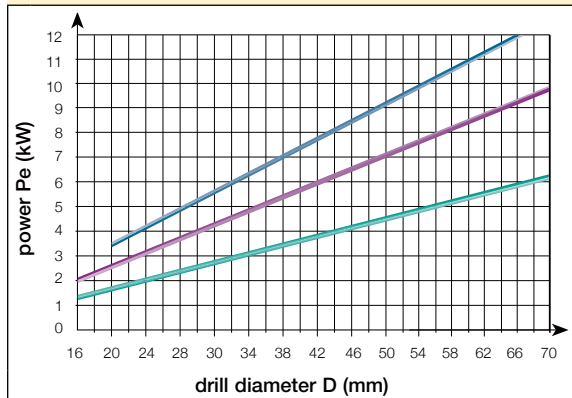


- f=0.25
- f=0.18
- f=0.1

Internal Coolant Pressure

Selecting Coolant Pressure and Flow Rate

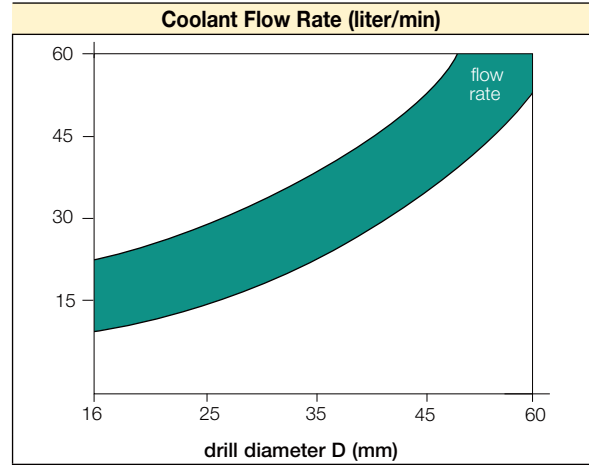

Minimum Coolant Pressure (bar)

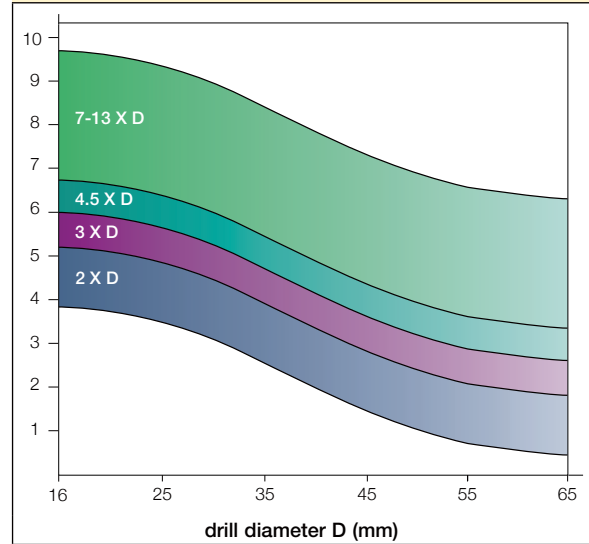

* For special drills more than 4xD, it is recommended to use high coolant pressure 15-70 bar

Troubleshooting

Irregular Conditions for DR Drills



If surface slope exceeds 5°, reduce feed by 50% during penetration or when exiting. It is preferred to pre-face the surface to eliminate slope.



- 1 Drilling into a pre-hole reduces feed to eliminate deflection⁽¹⁾ of the drill body.
 - 2 Drilling an interrupted cut reduces feed during crossing to eliminate deflection⁽¹⁾ of the drill body.
 - 3 Insufficient stability of workpiece requires additional support. Reduce feed.
- ⁽¹⁾ Deflection may be observed by a mark on the drill body.

Stacked Plates


Drilling operation is not recommended, but may be done by specially designed drills. Apply standard cutting data.

Regular Conditions for DR Drills



Indexable Insert Drills - Troubleshooting DR Chips

| Chip Jamming Due to Long Chips | Chip Jamming Despite Short Chips |
|--|--|
| | |
| Solutions | Solutions |
| 1 Increase feed. 2 Long chips that rotate around the drill are problematic. If chip formation can not be improved by changing the machining conditions, use a pecking cycle. <div style="text-align: center;"> </div> | 1 Increase coolant pressure/volume. 2 Reduce cutting speed. |

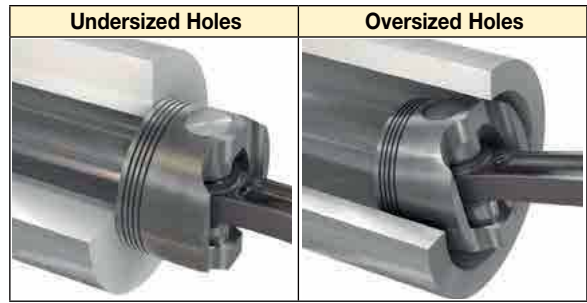


Rotating Drill

- Check that overlapping is correct between inner and outer inserts.
- Check inner insert over center.
- Increase coolant pressure.

Non-Rotating Drill

- Check misalignment.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert over center.
- Rotate drill 180 degrees.
- Increase coolant pressure.

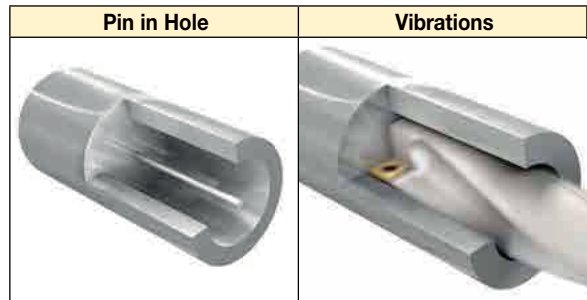

Rotating Drill

- Use shorter drill overhang (if possible).
- Reduce feed by 30-50%.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert is positioned over center within its limits.
- Increase coolant pressure.

Non-Rotating Drill

- Check misalignment.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert over center.
- Rotate drill 180 degrees.
- Increase coolant pressure.

Troubleshooting



Cone Hole

Rotating Drill

- Use shorter drill overhang (if possible).
- Reduce feed by 30-50%.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert is positioned over center within its limits.
- Increase coolant pressure.

Non-Rotating Drill

- Check misalignment.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert is positioned over center within its limits.
- Rotate drill 180 degrees.
- Increase coolant pressure.



Bad Surface Finish

Rotating Drill

- Improve chip formation (change cutting condition).
- Increase coolant pressure.
- Increase speed and reduce feed.
- Stabilize clamping device.

Non-Rotating Drill

- Improve chip formation (change cutting condition).
- Increase coolant pressure.
- Increase speed and reduce feed.
- Stabilize clamping device.




Chip Jamming

Rotating Drill

- Improve chip formation (change or cutting condition).
- Increase coolant pressure.

Non-Rotating Drill

- Improve chip formation (change or cutting condition).
- Increase coolant pressure.



Deflection

Rotating Drill

- Use shorter drill overhang (if possible).
- Reduce feed by 30-50%.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert is positioned over center within its limits.
- Increase coolant pressure.
- Stabilize clamping device.


Non-Rotating Drill

- Check misalignment.
- Check that overlapping is correct between inner and outer inserts.
- Check inner insert is positioned over center within its limits.
- Rotate drill 180 degrees.
- Increase coolant pressure.




Broken Screw

- Use recommended torque wrench.
- Lubricate the screw before tightening.



Insufficient Machine Power

- Reduce speed and feed.



Insufficient Machine Torque


- Reduce feed.

PCD Indexable Drilling Inserts



SOMX

Inserts for DR Drills with Brazed PCD Tip for Machining ISO N Materials

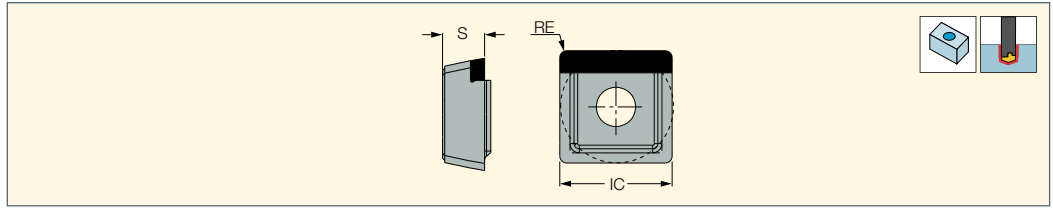


| Designation | Dimensions | | | ID5 |
|-------------|------------|------|------|-----|
| | IC | S | RE | |
| SOMX 050204 | 5.40 | 2.40 | 0.40 | ● |
| SOMX 060304 | 6.20 | 3.20 | 0.40 | ● |
| SOMX 070305 | 7.70 | 3.60 | 0.50 | ● |



SOMT

Inserts for DR Drills with Brazed PCD Tip for Machining ISO N Materials

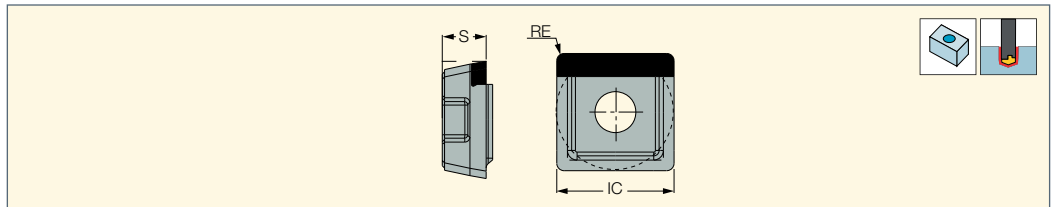

| Designation | Dimensions | | | ID5 |
|-------------|------------|------|------|-----|
| | IC | S | RE | |
| SOMT 09T306 | 9.00 | 3.81 | 0.60 | ● |
| SOMT 120408 | 12.70 | 4.76 | 0.80 | ● |
| SOMT 160512 | 16.00 | 5.56 | 1.20 | ● |

Cutting Conditions

| ISO | Material | Condition | Hardness HB | Group No. ⁽¹⁾ | Mat. No. | Cutting Speed | Feed Vs. Drill Diameter mm/rev | | | | | |
|----------------------|-------------------------|------------------------------|--------------|--------------------------|----------|----------------------|--------------------------------|-----------|-----------|-----------|--------------|----|
| | | | | | | V _c m/min | DR-05 PCD | DR-06 PCD | DR-07 PCD | DR-09 PCD | DR-12/16 PCD | |
| N | aluminum-wrought alloys | not hardenable | 60 | 21 | 21 | 300-600 | 0.08-0.25 | 0.08-0.25 | 0.08-0.25 | 0.1-0.25 | 0.1-0.25 | |
| | | hardenable | 100 | 22 | 22 | | | | | | | |
| aluminum-cast alloys | ≤12% Si | not hardenable | 75 | 23 | 23 | | | | | | | |
| | >12% Si | hardenable | 90 | 24 | 24 | | | | | | | |
| N | copper alloys | high temperature | 130 | 25 | 25 | | | | | | | |
| | | >1% Pb | free cutting | 110 | 26 | | | | | | | 26 |
| | | brass | 90 | 27 | 27 | | | | | | | |
| N | non metallic | electrolytic copper | 100 | 28 | 28 | | | | | | | |
| | | duroplastics, fiber plastics | 70 shore D | 29 | 29 | | | | | | | |
| | | hard rubber | 55 shore D | 30 | 30 | | | | | | | |

- When using external coolant supply only, reduce cutting speed by 10%
- This table refers to 2/3xD drill lengths • For 4xD and 5xD drills, decrease cutting data by 15%




Scan the QR code for additional information.
Enter the item description in the search field to access additional related data.

Solid Carbide Drills With Brazed PCD Tips

ISCAR PCD LINE

MPD

Solid Carbide Drills with Brazed PCD Tips, Internal Coolant Channels.

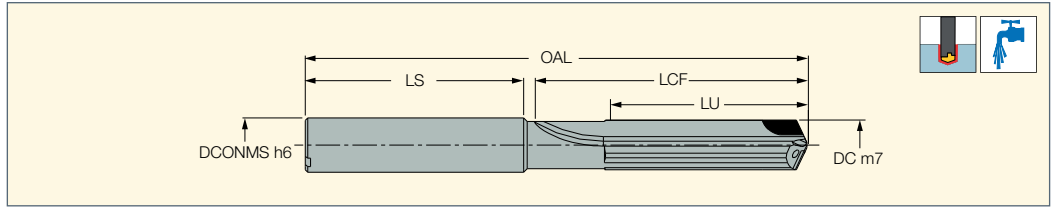

| Designation | DC | DCONMS | OAL | LU | LS | LCF |
|---------------------|-------|--------|--------|-------|------|-------|
| MPD 050-025-06C-5D | 5.00 | 6.00 | 82.00 | 35.00 | 36.0 | 42.0 |
| MPD 060-030-06C-5D | 6.00 | 6.00 | 82.00 | 35.00 | 36.0 | 44.0 |
| MPD 068-034-08C-5D | 6.80 | 8.00 | 91.00 | 43.00 | 36.0 | 53.0 |
| MPD 070-035-08C-5D | 7.00 | 8.00 | 91.00 | 43.00 | 36.0 | 53.0 |
| MPD 080-040-08C-5D | 8.00 | 8.00 | 91.00 | 43.00 | 36.0 | 53.0 |
| MPD 085-043-010C-5D | 8.50 | 10.00 | 103.00 | 49.00 | 40.0 | 60.0 |
| MPD 090-045-010C-5D | 9.00 | 10.00 | 103.00 | 49.00 | 40.0 | 61.0 |
| MPD 100-050-010C-5D | 10.00 | 10.00 | 103.00 | 49.00 | 40.0 | 61.0 |
| MPD 102-051-012C-5D | 10.20 | 12.00 | 118.00 | 56.00 | 45.0 | 71.0 |
| MPD 110-055-012C-5D | 11.00 | 12.00 | 118.00 | 56.00 | 45.0 | 71.0 |
| MPD 120-060-012C-5D | 12.00 | 12.00 | 118.00 | 56.00 | 45.0 | 71.0 |
| MPD 130-065-014C-5D | 14.00 | 14.00 | 124.00 | 60.00 | 45.0 | 77.0 |
| MPD 140-070-014C-5D | 14.00 | 14.00 | 124.00 | 60.00 | 45.0 | 77.0 |
| MPD 160-080-016C-5D | 16.00 | 16.00 | 133.00 | 63.00 | 45.0 | 83.0 |
| MPD 180-090-018C-5D | 18.00 | 18.00 | 143.00 | 71.00 | 48.0 | 93.0 |
| MPD 200-100-020C-5D | 20.00 | 20.00 | 153.00 | 77.00 | 48.0 | 101.0 |

Scan the QR code for additional information.



Enter the item description in the search field to access additional related data.



Interchangeable High Precision Reaming Heads

INDEXH-REAM

RM-SEI-B
Single-Edged Reaming Inserts
for General Applications at
High Cutting Speeds



| Designation | SSC ⁽¹⁾ | a° | Dimensions | | | Tough ↔ Hard | | | |
|--------------|--------------------|----|------------|------|------|--------------|------|-------|-------|
| | | | L | W1 | S | IC30N | IC07 | IC507 | IC907 |
| RM-SEI-1B-00 | 1.0 | 0 | 15.50 | 2.80 | 1.50 | | | | ● |
| RM-SEI-1B-06 | 1.0 | 6 | 15.50 | 2.80 | 1.50 | | | ● | ● |
| RM-SEI-1B-12 | 1.0 | 12 | 15.50 | 2.80 | 1.50 | | ● | | ● |
| RM-SEI-2B-00 | 2.0 | 0 | 15.50 | 3.60 | 1.50 | | | | ● |
| RM-SEI-2B-06 | 2.0 | 6 | 15.50 | 3.60 | 1.50 | | | ● | ● |
| RM-SEI-2B-12 | 2.0 | 12 | 15.50 | 3.60 | 1.50 | | ● | | ● |
| RM-SEI-3B-00 | 3.0 | 0 | 17.00 | 4.40 | 2.00 | | | | ● |
| RM-SEI-3B-06 | 3.0 | 6 | 17.00 | 4.40 | 2.00 | | | ● | ● |
| RM-SEI-3B-12 | 3.0 | 12 | 17.00 | 4.40 | 2.00 | | ● | | ● |
| RM-SEI-4B-06 | 4.0 | 6 | 22.50 | 6.60 | 3.00 | ● | | ● | ● |
| RM-SEI-4B-12 | 4.0 | 12 | 22.50 | 6.60 | 3.00 | | ● | | ● |

• Lead type of insert should be compatible with lead type of the tool


⁽¹⁾ Insert size

● First choice grade

Accessories

RM SETTING DEVICE

Reamer Setting Device




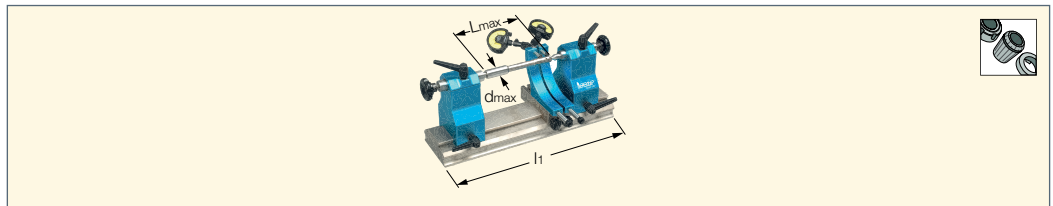


| Designation | L _{max} | l ₁ | d _{max} | kg |
|-------------------|------------------|----------------|------------------|-------|
| RM SETTING DEVICE | 265.0 | 450.00 | 170.0 | 25.00 |






Front Angles and Cutting Geometries

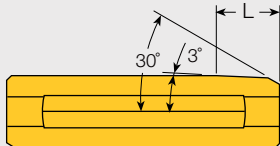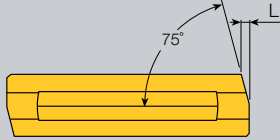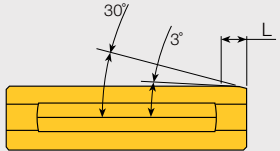4 Standard Lead Angles Are Available:

| Lead | L [mm] | Use |
|------------------|--------|--|
| A | 3 | higher surface quality, lower cutting conditions (not recommended for nonferrous materials)  |
| B | 1.3 | universal use, high speed cutting conditions. can be used on a wide range of materials  |
| C | 0.55 | suitable for aluminum and brass at high cutting speed  |
| D ⁽¹⁾ | 0.6 | when needed for blind hole - lower feed  |

⁽¹⁾ On request

3 Standard Cutting Angles Are Available:

| Angle [deg.] | Use |
|--------------|---|
| 0° | for cast iron applications  |
| 6° | general use  |
| 12° | for stainless steel and aluminum  |

Carbide Grades

IC07 grade is the basic substrate for reaming inserts. It is a very versatile submicron grade. **IC07** features very high fracture toughness and wear resistance, which is required for efficient high speed reaming. An uncoated **IC07** can be used for machining nonferrous (N type material group) applications.

The following grades can be provided on request:





- **PCD** grade for machining aluminum



INDEX-H-REAM



Concept

The **INDEX-H-REAM** Line is available in 4 sizes and features two different holder geometries (short flute and long flute). The holder selection depends on the hole type (through or blind).

| RM-SEI-1 | RM-SEI-2 | RM-SEI-3 | RM-SEI-4 |
|---|---|---|---|
|  |  |  |  |
| Ø8.00-9.99 mm (Ø.315-.393") | Ø10.00-11.99 mm (Ø.393-.472") | Ø12.00-25.99 mm (Ø.472-1.024") | Ø26.00-32.00 mm (Ø1.024-1.260") |




Applications

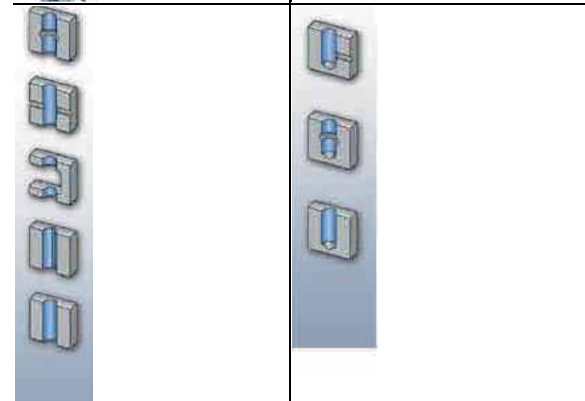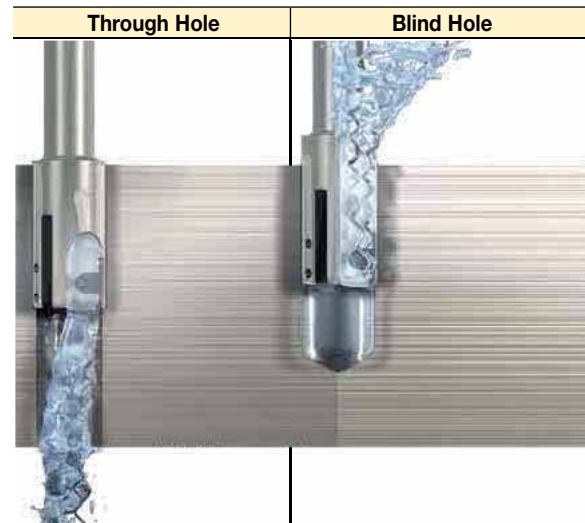


Through Hole
Short flute holder. This holder has a lateral coolant outlet located right above the insert. The coolant is pointed directly to the cutting edge to lubricate it and divert the chips forward. Additional coolant outlets are located behind the guiding pads. Their purpose is to reduce high friction that is created between the pads and the reamed surface during machining.

Blind Hole
Long flute holder. This holder has a front coolant outlet. The liquid reaches the bottom of the blind hole and evacuates the formed chips. These chips are conveyed backwards through the long chip gullet (flute) of the holder.

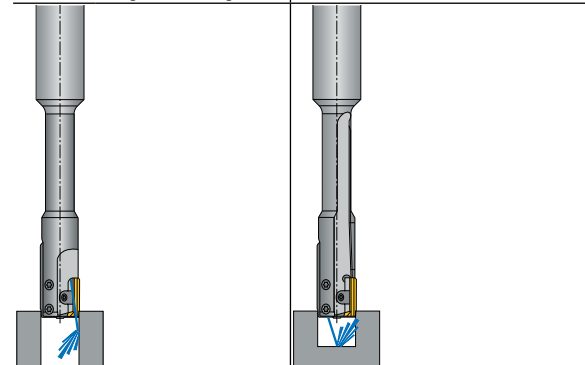

Setting Procedure


- 1 Place the reamer between the centering pins of the device.

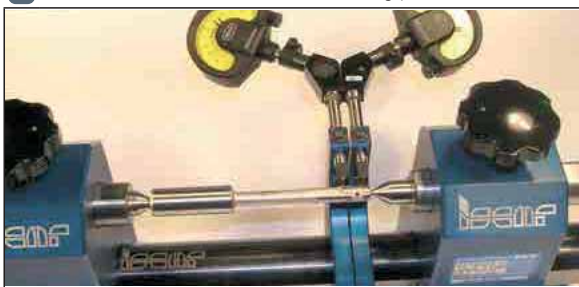



- 2 Use the pad as a reference for setting the indicator to zero.



- 3 Rotate and place the inserts against indicators.

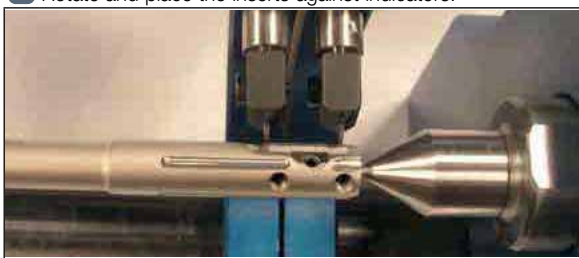

- 4 Tighten the adjustment screws in a clockwise direction.

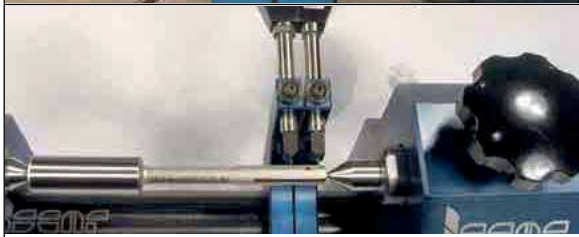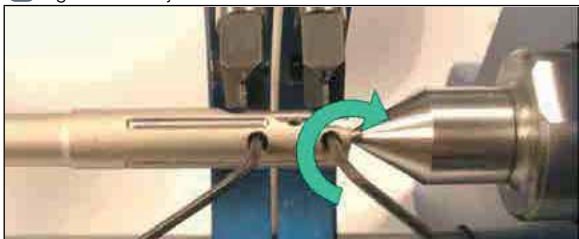


- 5 Adjust the frontal side of the insert to:
+15 μm (+0.6 μin) on $D \leq 9.99$,
+20 μm (+0.8 μin) on $D \leq 10.00$

- 6 Adjust the rear side of insert to:
+5 μm (+0.2 μin) on $D \leq 9.99$,
+10 μm (+0.4 μin) on $D \leq 10.00$

Back Taper


The back taper prevents the reamer from jamming, as well as lowering reaming forces and improving surface quality. Incorrect back taper may cause unstable reaming, accelerated wear and rough surface finish.

High Friction Lubricated Zones

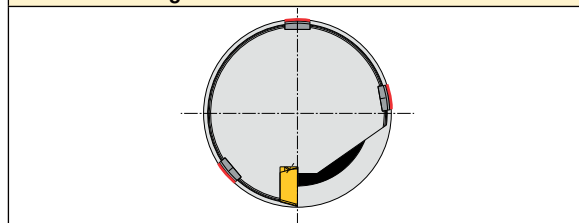


Insert Indexing


- 1 Rotate the adjustment screws one turn counterclockwise (CCW).

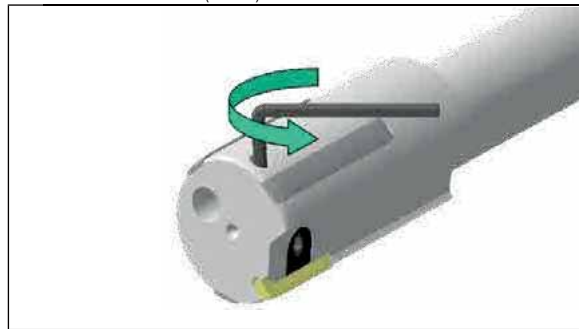

- 2 Rotate the clamping screw CCW from the top and/or clockwise (CW) from the bottom, turning both sides simultaneously.

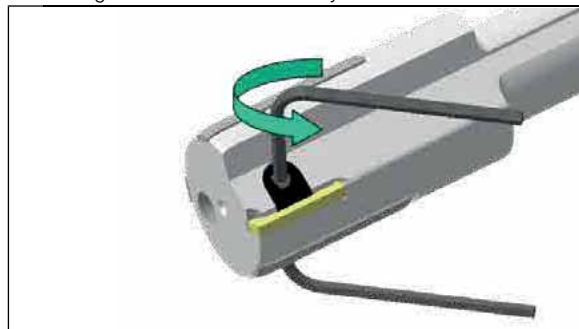

- 3 Remove the insert. Clean the insert and the pocket. Place the sharp edge on the outer position. Press the insert against the back stopper and the two adjustment pins. Tighten the clamping wedge by rotating the clamping screw CW from the top or CCW from the bottom.

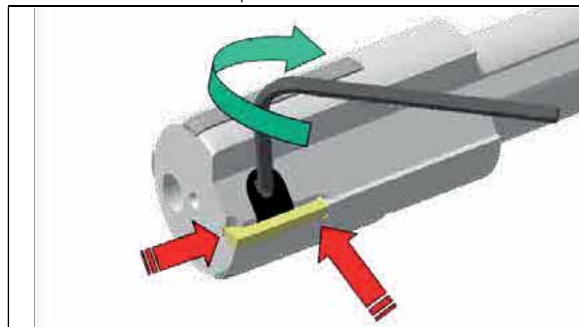

Setting Methods

There are two optional setting methods - comparison micrometer and setting device. Comparison micrometer with dial gauge, although a low cost solution and readily available for small workshops, is prone to damaging the cutting edge and therefore not recommended.

Using a Comparison Micrometer

Set the micrometer to the correct diameter using the precision blocks. Adjust the frontal diameter and back taper by turning the adjustment screw clockwise. The front diameter should be larger than the rear diameter by approximately 0.015 mm.(0.6 μin).

Using a Setting Device

ISCAR's mechanical setting device enables easy, quick and accurate adjustment. Due to its modular construction, it can be used for standard, special and more complicated reamer adjustments.

Setting Device Located Between Centers

- shorter setting time
- modular system
- higher accuracy
- no risk of damaging the cutting edge








H-REAM Cutting Conditions

The cutting conditions in the table below should be used to start a new application. Optimal conditions for a specific application should be evaluated by examining the results and changing the machining conditions accordingly.

| Material No. | Material | Lead A=15°/3° L3 (Reaming Allowance = 0.1-0.3) | | | | Lead B=30°/3° L1.3 (Reaming Allowance = 0.1-0.3) | | | |
|--------------|-------------------------|---|--|--|--|---|----------|--------------------------------------|------------|
| | | Cutting Speed V _c [m/min] | | | | Feed [mm/rev] | Rake [°] | Cutting Speed V _c [m/min] | |
| | | PCD | | | | | | Carbide | PCD |
| 21-22 | aluminum-wrought alloys | please ask | | | | 0.1-0.3 | 12 | 160-200 | please ask |
| 23-25 | aluminum-cast alloys | | | | | 0.1-0.3 | 12 | 160-200 | |
| 26-28 | copper alloys | | | | | 0.1-0.2 | 0 | 80-100 | |
| 29-30 | non metallic | | | | | 0.1-0.3 | 0 | 10-70 | |


| Material No. | Material | Lead D=30°/3° L0.6 (Reaming Allowance = 0.1-0.2) | | | | Lead C=75°/3° L0.55 (Reaming Allowance = 0.2-0.4) | | | |
|--------------|-------------------------|---|----------|--------------------------------------|------------|--|----------|--------------------------------------|------------|
| | | Feed [mm/rev] | Rake [°] | Cutting Speed V _c [m/min] | | Feed [mm/rev] | Rake [°] | Cutting Speed V _c [m/min] | |
| | | | | Carbide | PCD | | | Carbide | PCD |
| 21-22 | aluminum-wrought alloys | 0.05-0.2 | 12 | 110-200 | please ask | 0.15-0.3 | 12 | 150-250 | please ask |
| 23-25 | aluminum-cast alloys | 0.05-0.2 | 12 | 180-200 | | 0.15-0.3 | 12 | 150-250 | |
| 26-28 | copper alloys | 0.05-0.2 | 0 | 80-100 | | | | | |
| 29-30 | non metallic | | | | | | | | |

Troubleshooting

| Problem | Cause | Solution |
|---|---|--|
| <p>hole too large</p>  | <ul style="list-style-type: none"> reamer or pilot hole not centered reamer too large cooling / lubrication problems | <ul style="list-style-type: none"> use a floating reamer chuck or correct pilot hole check size of reamer and correct if necessary change lubricant and increase coolant pressure |
| <p>hole too small</p>  | <ul style="list-style-type: none"> worn reamer reaming allowance too small cooling / lubrication problems | <ul style="list-style-type: none"> replace the reamer increase reaming allowance change lubricant and increase coolant pressure |
| <p>conical hole (larger bottom)</p>  | <ul style="list-style-type: none"> misalignment between pre hole and reamer centers | <ul style="list-style-type: none"> re-align or use a floating reamer chuck |
| <p>conical hole (larger entrance)</p>  | <ul style="list-style-type: none"> misalignment between pre-hole and reamer centers material jammed between reamer and hole in the upper hole section | <ul style="list-style-type: none"> re-align or use a floating reamer chuck secure the tool axially |
| <p>poor surface finish</p>  | <ul style="list-style-type: none"> worn reamer misalignment between pre-hole and reamer centers problems with chip evacuation incorrect cutting parameters built-up edge | <ul style="list-style-type: none"> replace the tool re-align or use a floating reamer chuck increase coolant pressure change cutting parameters change cutting parameters or coolant conditions |

SOLIDH-REAM

RM-FCR-H7N-CS-C
 DIN 212B Solid Carbide
 Reamers with Helical Flutes
 and a Cylindrical Shank
 for Through Holes

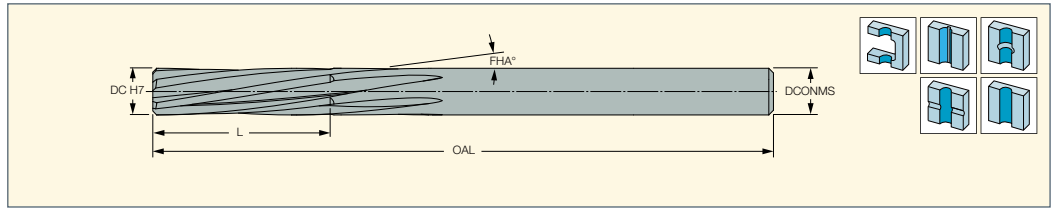

| Designation | Dimensions | | | | | | IC07 |
|----------------------|------------|-------|--------|--------------------|------|--------|------|
| | DC | L | OAL | NOF ⁽¹⁾ | FHA | DCONMS | |
| RM-FCR-0300-H7N-CS-C | 3.00 | 15.00 | 61.00 | 5 | 10.0 | 3.00 | ● |
| RM-FCR-0350-H7N-CS-C | 3.50 | 18.00 | 70.00 | 5 | 10.0 | 3.50 | ● |
| RM-FCR-0400-H7N-CS-C | 4.00 | 19.00 | 75.00 | 5 | 10.0 | 4.00 | ● |
| RM-FCR-0450-H7N-CS-C | 4.50 | 21.00 | 80.00 | 5 | 10.0 | 4.50 | ● |
| RM-FCR-0500-H7N-CS-C | 5.00 | 23.00 | 86.00 | 5 | 10.0 | 5.00 | ● |
| RM-FCR-0550-H7N-CS-C | 5.50 | 26.00 | 93.00 | 6 | 10.0 | 5.50 | ● |
| RM-FCR-0600-H7N-CS-C | 6.00 | 26.00 | 93.00 | 6 | 10.0 | 6.00 | ● |
| RM-FCR-0650-H7N-CS-C | 6.50 | 28.00 | 101.00 | 6 | 10.0 | 6.50 | ● |
| RM-FCR-0700-H7N-CS-C | 7.00 | 31.00 | 109.00 | 6 | 10.0 | 7.00 | ● |
| RM-FCR-0750-H7N-CS-C | 7.50 | 33.00 | 117.00 | 6 | 10.0 | 7.50 | ● |
| RM-FCR-0800-H7N-CS-C | 8.00 | 33.00 | 117.00 | 6 | 10.0 | 8.00 | ● |
| RM-FCR-0850-H7N-CS-C | 8.50 | 36.00 | 125.00 | 6 | 10.0 | 8.50 | ● |
| RM-FCR-0900-H7N-CS-C | 9.00 | 36.00 | 125.00 | 6 | 10.0 | 9.00 | ● |
| RM-FCR-0950-H7N-CS-C | 9.50 | 38.00 | 133.00 | 6 | 10.0 | 9.50 | ● |
| RM-FCR-1000-H7N-CS-C | 10.00 | 38.00 | 133.00 | 6 | 10.0 | 10.00 | ● |
| RM-FCR-1050-H7N-CS-C | 10.50 | 41.00 | 142.00 | 7 | 10.0 | 10.50 | ● |
| RM-FCR-1100-H7N-CS-C | 11.00 | 41.00 | 142.00 | 7 | 10.0 | 11.00 | ● |
| RM-FCR-1200-H7N-CS-C | 12.00 | 44.00 | 151.00 | 7 | 10.0 | 12.00 | ● |
| RM-FCR-1300-H7N-CS-C | 13.00 | 44.00 | 151.00 | 7 | 10.0 | 13.00 | ● |
| RM-FCR-1400-H7N-CS-C | 14.00 | 47.00 | 160.00 | 7 | 10.0 | 14.00 | ● |
| RM-FCR-1500-H7N-CS-C | 15.00 | 50.00 | 162.00 | 7 | 10.0 | 15.00 | ● |
| RM-FCR-1600-H7N-CS-C | 16.00 | 52.00 | 170.00 | 7 | 10.0 | 16.00 | ● |


- Hole tolerance: H7 manufacturing tolerance according to DIN1420
 - Available grades: IC07 - uncoated, optional: IC907 - TiAlN PVD coated
 - Special diameters are available on request
 - For user guide and cutting conditions, see pages 127-129
- ⁽¹⁾ Number of flutes



SOLIDH-REAM

RM-FCR-H7S-CS-C

DIN 212C Solid Carbide Reamers with Straight Flutes and a Cylindrical Shank for Blind Holes

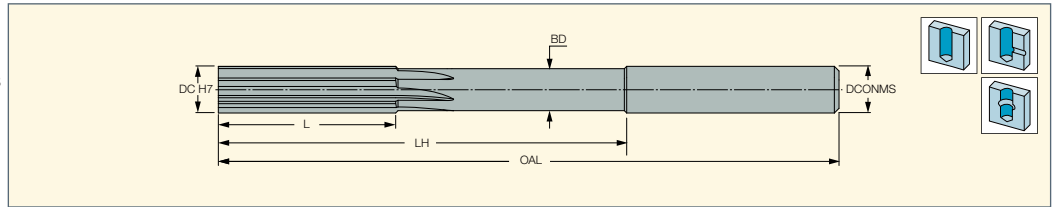

| Designation | Dimensions | | | | | | | IC07 |
|----------------------|------------|-------|-------|-------|--------|--------------------|--------|------|
| | DC | L | LH | BD | OAL | NOF ⁽¹⁾ | DCONMS | |
| RM-FCR-0300-H7S-CS-C | 3.00 | 15.00 | 30.0 | - | 61.00 | 6 | 3.00 | ● |
| RM-FCR-0320-H7S-CS-C | 3.20 | 18.00 | 33.0 | - | 70.00 | 6 | 3.20 | ● |
| RM-FCR-0350-H7S-CS-C | 3.50 | 18.00 | 33.0 | - | 70.00 | 6 | 3.50 | ● |
| RM-FCR-0400-H7S-CS-C | 4.00 | 19.00 | 44.0 | 3.50 | 75.00 | 6 | 4.00 | ● |
| RM-FCR-0450-H7S-CS-C | 4.50 | 21.00 | 46.0 | 4.00 | 80.00 | 6 | 4.50 | ● |
| RM-FCR-0500-H7S-CS-C | 5.00 | 23.00 | 53.0 | 4.30 | 86.00 | 6 | 5.00 | ● |
| RM-FCR-0550-H7S-CS-C | 5.50 | 26.00 | 56.0 | 4.50 | 93.00 | 6 | 5.60 | ● |
| RM-FCR-0600-H7S-CS-C | 6.00 | 26.00 | 56.0 | 5.00 | 93.00 | 6 | 5.60 | ● |
| RM-FCR-0650-H7S-CS-C | 6.50 | 28.00 | 63.0 | 5.50 | 101.00 | 6 | 6.30 | ● |
| RM-FCR-0700-H7S-CS-C | 7.00 | 31.00 | 69.0 | 6.50 | 109.00 | 6 | 7.10 | ● |
| RM-FCR-0750-H7S-CS-C | 7.50 | 31.00 | 69.0 | 6.50 | 109.00 | 6 | 7.10 | ● |
| RM-FCR-0800-H7S-CS-C | 8.00 | 33.00 | 75.0 | 7.00 | 117.00 | 6 | 8.00 | ● |
| RM-FCR-0850-H7S-CS-C | 8.50 | 33.00 | 75.0 | 7.00 | 117.00 | 6 | 8.00 | ● |
| RM-FCR-0900-H7S-CS-C | 9.00 | 36.00 | 81.0 | 8.00 | 125.00 | 6 | 9.00 | ● |
| RM-FCR-0950-H7S-CS-C | 9.50 | 36.00 | 81.0 | 8.00 | 125.00 | 6 | 9.00 | ● |
| RM-FCR-1000-H7S-CS-C | 10.00 | 38.00 | 87.0 | 9.00 | 133.00 | 6 | 10.00 | ● |
| RM-FCR-1050-H7S-CS-C | 10.50 | 38.00 | 87.0 | 9.00 | 133.00 | 6 | 10.00 | ● |
| RM-FCR-1100-H7S-CS-C | 11.00 | 41.00 | 96.0 | 9.00 | 142.00 | 6 | 10.00 | ● |
| RM-FCR-1200-H7S-CS-C | 12.00 | 44.00 | 105.0 | 9.00 | 151.00 | 6 | 10.00 | ● |
| RM-FCR-1300-H7S-CS-C | 13.00 | 44.00 | 105.0 | 9.00 | 151.00 | 6 | 10.00 | ● |
| RM-FCR-1400-H7S-CS-C | 14.00 | 47.00 | 110.0 | 11.50 | 160.00 | 8 | 12.50 | ● |
| RM-FCR-1500-H7S-CS-C | 15.00 | 50.00 | 112.0 | 11.50 | 162.00 | 8 | 12.50 | ● |
| RM-FCR-1600-H7S-CS-C | 16.00 | 52.00 | 120.0 | 11.50 | 170.00 | 8 | 12.50 | ● |

• Hole tolerance: H7 manufacturing tolerance according to DIN1420 • Available grades: IC07 - uncoated, optional: IC907 - TiAlN PVD coated

• Special diameters are available on request • For user guide and cutting conditions, see pages 127-129

⁽¹⁾ Number of flutes

Machining Conditions for Solid Carbide Reamers

| Material | Tensile Strength or Brinell Hardness N/mm ² Bzw. HB | Reamer Diameter mm | Reaming Allowance Relative to Diameter | Feed mm/rev | Cutting Speed m/min |
|------------------------------------|--|--------------------|--|-------------|---------------------|
| Aluminum Alloy | over 80 HB | up to 10 | 0.06-0.12 | 0.20-0.30 | Si<7% 10-30 |
| | | 10-25 | 0.10-0.30 | 0.30-0.50 | |
| | | 25-40 | 0.30-0.50 | 0.40-0.70 | Si<7% 30-60 |
| Copper | | up to 10 | 0.10-0.20 | 0.30-0.60 | |
| | | 10-25 | 0.20-0.40 | 0.40-0.80 | 20-60 |
| | | 25-40 | 0.40-0.60 | 0.50-1.00 | |
| Brass Red Bronze Cast Bronze | | up to 10 | 0.06-0.12 | 0.20-0.30 | |
| | | 10-25 | 0.10-0.30 | 0.30-0.50 | 15-50 |
| | | 25-40 | 0.30-0.50 | 0.40-0.70 | |
| Thermoset Polymers | | up to 10 | 0.10-0.25 | 0.30-0.60 | |
| | | 10-25 | 0.20-0.40 | 0.40-0.80 | 15-30 |
| | | 25-40 | 0.40-0.60 | 0.50-1.00 | |




Reamer Manufacturing Tolerances

| Nominal Diameter of Reamer D1 in mm | | Reamer Manufacturing Tolerances DIN 1420 | | | | | | | | | | | | |
|-------------------------------------|-------|--|------|------|------|------|------|-------|------|------|------|-------|------|------|
| | | Admissible Maximum and Minimum Reamer Dimensions of Nominal Diameter D1 in Mm for Drilling Tolerance Range | | | | | | | | | | | | |
| Over | Up To | A9 | A11 | B8 | B9 | B10 | B11 | C8 | C9 | C10 | C11 | | | |
| 1 | 3 | +291 | +321 | +151 | +161 | +174 | +191 | + 71 | + 81 | + 94 | +111 | | | |
| | | +282 | +300 | +146 | +152 | +160 | +170 | + 66 | + 72 | + 80 | + 90 | | | |
| 3 | 6 | +295 | +333 | +155 | +165 | +180 | +203 | + 85 | + 95 | +110 | +133 | | | |
| | | +284 | +306 | +148 | +154 | +163 | +176 | + 78 | + 84 | + 93 | +106 | | | |
| 6 | 10 | +310 | +356 | +168 | +180 | +199 | +226 | + 98 | +110 | +129 | +156 | | | |
| | | +297 | +324 | +160 | +167 | +178 | +194 | + 90 | + 97 | +108 | +124 | | | |
| 10 | 18 | +326 | +383 | +172 | +186 | +209 | +243 | +117 | +131 | +154 | +188 | | | |
| | | +310 | +344 | +162 | +170 | +184 | +204 | +107 | +115 | +129 | +149 | | | |
| 18 | 30 | +344 | +410 | +188 | +204 | +231 | +270 | +138 | +154 | +181 | +220 | | | |
| | | +325 | +364 | +176 | +185 | +201 | +224 | +126 | +135 | +151 | +174 | | | |
| 30 | 40 | +362 | +446 | +203 | +222 | +255 | +206 | +153 | +172 | +205 | +256 | | | |
| | | +340 | +390 | +189 | +200 | +220 | +250 | +139 | +150 | +170 | +200 | | | |
| 40 | 50 | +372 | +456 | +213 | +232 | +265 | +316 | +163 | +182 | +215 | +266 | | | |
| | | +350 | +400 | +199 | +210 | +230 | +260 | +149 | +160 | +180 | +210 | | | |
| 50 | 65 | +402 | +501 | +229 | +252 | +292 | +351 | +179 | +202 | +242 | +301 | | | |
| | | +376 | +434 | +212 | +226 | +250 | +284 | +162 | +176 | +200 | +234 | | | |
| 65 | 80 | +422 | +521 | +239 | +262 | +302 | +361 | +189 | +212 | +252 | +311 | | | |
| | | +396 | +454 | +222 | +236 | +260 | +294 | +172 | +186 | +210 | +244 | | | |
| 80 | 100 | +453 | +567 | +265 | +293 | +339 | +407 | +215 | +243 | +289 | +357 | | | |
| | | +422 | +490 | +246 | +262 | +290 | +330 | +196 | +212 | +240 | +280 | | | |
| 100 | 120 | +483 | +597 | +285 | +313 | +359 | +427 | +225 | +253 | +299 | +367 | | | |
| | | +452 | +520 | +266 | +282 | +310 | +350 | +206 | +222 | +250 | +290 | | | |
| 120 | 140 | +545 | +672 | +313 | +345 | +396 | +472 | +253 | +285 | +336 | +412 | | | |
| | | +510 | +584 | +290 | +310 | +340 | +384 | +230 | +250 | +280 | +324 | | | |
| 140 | 160 | +605 | +732 | +333 | +365 | +416 | +492 | +263 | +295 | +346 | +422 | | | |
| | | +570 | +644 | +310 | +330 | +360 | +404 | +240 | +260 | +290 | +334 | | | |
| 160 | 180 | +665 | +792 | +363 | +395 | +446 | +522 | +283 | +315 | +366 | +442 | | | |
| | | +630 | +704 | +340 | +360 | +390 | +434 | +260 | +280 | +310 | +354 | | | |
| Over | Up To | D8 | D9 | D10 | D11 | E7 | E8 | E9 | F6 | F7 | F8 | F9 | G6 | G7 |
| 1 | 3 | + 31 | + 41 | + 54 | + 71 | + 22 | + 25 | + 35 | + 11 | + 14 | + 17 | + 27 | + 7 | + 10 |
| | | + 26 | + 32 | + 40 | + 50 | + 18 | + 20 | + 26 | + 8 | + 10 | + 12 | + 18 | + 4 | + 6 |
| 3 | 6 | + 45 | + 55 | + 70 | + 93 | + 30 | + 35 | + 45 | + 16 | + 20 | + 25 | + 35 | + 10 | + 14 |
| | | + 38 | + 44 | + 53 | + 66 | + 25 | + 28 | + 34 | + 13 | + 15 | + 18 | + 24 | + 7 | + 9 |
| 6 | 10 | + 58 | + 70 | + 89 | +116 | + 37 | + 43 | + 55 | + 20 | + 25 | + 31 | + 43 | + 12 | + 17 |
| | | + 50 | + 57 | + 68 | + 84 | + 31 | + 35 | + 42 | + 16 | + 19 | + 23 | + 30 | + 8 | + 11 |
| 10 | 18 | + 72 | + 86 | +109 | +143 | + 47 | + 54 | + 68 | + 25 | + 31 | + 38 | + 52 | + 15 | + 21 |
| | | + 62 | + 70 | + 84 | +104 | + 40 | + 44 | + 52 | + 21 | + 24 | + 28 | + 36 | + 11 | + 14 |
| 18 | 30 | + 93 | +109 | +136 | +175 | + 57 | + 68 | + 84 | + 31 | + 37 | + 48 | + 64 | + 18 | + 24 |
| | | + 81 | + 90 | +106 | +129 | + 49 | + 56 | + 65 | + 26 | + 29 | + 36 | + 45 | + 13 | + 16 |
| 30 | 50 | +113 | +132 | +165 | +216 | + 71 | + 83 | + 102 | + 38 | + 46 | + 58 | + 77 | + 22 | + 30 |
| | | + 99 | +110 | +130 | +160 | + 62 | + 69 | + 80 | + 32 | + 37 | + 44 | + 55 | + 16 | + 21 |
| 50 | 80 | +139 | +162 | +202 | +261 | + 5 | + 99 | +122 | + 46 | + 55 | + 69 | + 92 | + 26 | + 35 |
| | | +122 | +136 | +160 | +194 | + 74 | + 82 | + 96 | + 39 | + 44 | + 52 | + 66 | + 19 | + 24 |
| 80 | 120 | +165 | +193 | +239 | +307 | +101 | +117 | +145 | + 54 | + 65 | + 81 | +109 | + 30 | + 41 |
| | | +146 | +162 | +190 | +230 | + 88 | + 98 | +114 | + 46 | + 52 | + 62 | + 78 | + 22 | + 28 |
| 120 | 180 | +198 | +230 | +281 | +357 | +119 | +138 | +170 | + 64 | + 77 | + 96 | + 128 | + 35 | + 48 |
| | | +175 | +195 | +225 | +269 | +105 | +115 | +135 | + 55 | + 63 | + 73 | + 93 | + 26 | + 34 |

BAYOT-REAM

RM-BN-H7LB

Quick Change Left-Hand Flute
Interchangeable Solid Carbide
Reaming Heads for High Speed
Reaming Through Holes

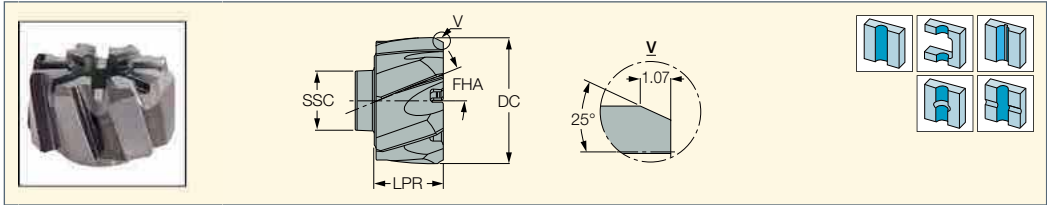

| Designation | Dimensions | | | | | IC08 |
|-----------------------------------|--------------------|--------|-------|--------------------|------|------|
| | SSC ⁽²⁾ | DC | LPR | NOF ⁽³⁾ | FHA | |
| RM-BN5-11.501-H7LB | BN5 | 11.501 | 9.50 | 6 | 20.0 | ● |
| RM-BN5-12.000-H7LB | BN5 | 12.000 | 9.50 | 6 | 20.0 | ● |
| RM-BN5-13.000-H7LB | BN5 | 13.000 | 9.50 | 6 | 20.0 | ● |
| RM-BN5-13.500-H7LB | BN5 | 13.500 | 9.50 | 6 | 20.0 | ● |
| RM-BN6-13.501-H7LB | BN6 | 13.501 | 9.50 | 6 | 20.0 | ● |
| RM-BN6-14.000-H7LB | BN6 | 14.000 | 9.50 | 6 | 20.0 | ● |
| RM-BN6-15.000-H7LB | BN6 | 15.000 | 9.50 | 6 | 20.0 | ● |
| RM-BN6-16.000-H7LB | BN6 | 16.000 | 9.50 | 6 | 20.0 | ● |
| RM-BN7-16.001-H7LB | BN7 | 16.001 | 10.70 | 6 | 20.0 | ● |
| RM-BN7-17.000-H7LB | BN7 | 17.000 | 10.70 | 6 | 20.0 | ● |
| RM-BN7-18.000-H7LB | BN7 | 18.000 | 10.70 | 6 | 20.0 | ● |
| RM-BN7-19.000-H7LB | BN7 | 19.000 | 10.70 | 6 | 20.0 | ● |
| RM-BN7-20.000-H7LB | BN7 | 20.000 | 10.70 | 6 | 20.0 | ● |
| RM-BN8-20.001-H7LB | BN8 | 20.001 | 12.90 | 8 | 20.0 | ● |
| RM-BN8-21.000-H7LB | BN8 | 21.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN8-22.000-H7LB | BN8 | 22.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN8-23.000-H7LB | BN8 | 23.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN8-24.000-H7LB | BN8 | 24.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN8-25.000-H7LB | BN8 | 25.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-26.000-H7LB ⁽¹⁾ | BN9 | 26.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-27.000-H7LB ⁽¹⁾ | BN9 | 27.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-28.000-H7LB ⁽¹⁾ | BN9 | 28.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-29.000-H7LB ⁽¹⁾ | BN9 | 29.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-30.000-H7LB ⁽¹⁾ | BN9 | 30.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-31.000-H7LB ⁽¹⁾ | BN9 | 31.000 | 12.90 | 8 | 20.0 | ● |
| RM-BN9-32.000-H7LB ⁽¹⁾ | BN9 | 32.000 | 12.90 | 8 | 20.0 | ● |

• For user guide, see pages 132-137

⁽¹⁾ The uncoated fine grain IC08 is available on request

⁽²⁾ Seat size code

⁽³⁾ Number of flutes

Complementary Grades (On Request)

ID5 (PCD) recommended for high speed reaming of aluminum (special cases).


RN01 (DLC coating) recommended for reaming the following materials: aluminum alloys (cast, wrought, etc.), brass, bronze and other nonferrous materials.



BAYOT-REAM

RM-BN-H7SA

Quick Change Straight Flute
Interchangeable Solid Carbide
Reaming Heads for High
Speed Reaming Blind Holes

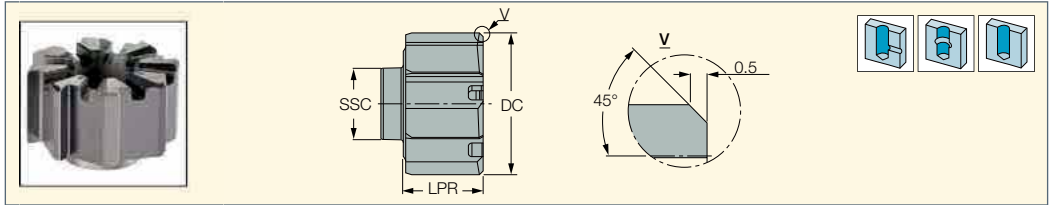

| Designation | Dimensions | | | | IC08 |
|-----------------------------------|--------------------|--------|-------|--------------------|------|
| | SSC ⁽²⁾ | DC | LPR | NOF ⁽³⁾ | |
| RM-BN5-11.501-H7SA | BN5 | 11.501 | 9.50 | 6 | ● |
| RM-BN5-12.000-H7SA | BN5 | 12.000 | 9.50 | 6 | ● |
| RM-BN5-13.000-H7SA | BN5 | 13.000 | 9.50 | 6 | ● |
| RM-BN5-13.500-H7SA | BN5 | 13.500 | 9.50 | 6 | ● |
| RM-BN6-13.501-H7SA | BN6 | 13.501 | 9.50 | 6 | ● |
| RM-BN6-14.000-H7SA | BN6 | 14.000 | 9.50 | 6 | ● |
| RM-BN6-15.000-H7SA | BN6 | 15.000 | 9.50 | 6 | ● |
| RM-BN6-16.000-H7SA | BN6 | 16.000 | 9.50 | 6 | ● |
| RM-BN7-16.001-H7SA | BN7 | 16.001 | 10.70 | 6 | ● |
| RM-BN7-17.000-H7SA | BN7 | 17.000 | 10.70 | 6 | ● |
| RM-BN7-18.000-H7SA | BN7 | 18.000 | 10.70 | 6 | ● |
| RM-BN7-19.000-H7SA | BN7 | 19.000 | 10.70 | 6 | ● |
| RM-BN7-20.000-H7SA | BN7 | 20.000 | 10.70 | 6 | ● |
| RM-BN8-20.001-H7SA | BN8 | 20.001 | 12.90 | 8 | ● |
| RM-BN8-21.000-H7SA | BN8 | 21.000 | 12.90 | 8 | ● |
| RM-BN8-22.000-H7SA | BN8 | 22.000 | 12.90 | 8 | ● |
| RM-BN8-23.000-H7SA | BN8 | 23.000 | 12.90 | 8 | ● |
| RM-BN8-24.000-H7SA | BN8 | 24.000 | 12.90 | 8 | ● |
| RM-BN8-25.000-H7SA | BN8 | 25.000 | 12.90 | 8 | ● |
| RM-BN9-26.000-H7SA | BN9 | 26.000 | 12.90 | 8 | ● |
| RM-BN9-27.000-H7SA ⁽¹⁾ | BN9 | 27.000 | 12.90 | 8 | ● |
| RM-BN9-28.000-H7SA ⁽¹⁾ | BN9 | 28.000 | 12.90 | 8 | ● |
| RM-BN9-29.000-H7SA ⁽¹⁾ | BN9 | 29.000 | 12.90 | 8 | ● |
| RM-BN9-30.000-H7SA ⁽¹⁾ | BN9 | 30.000 | 12.90 | 8 | ● |
| RM-BN9-31.000-H7SA ⁽¹⁾ | BN9 | 31.000 | 12.90 | 8 | ● |
| RM-BN9-32.000-H7SA ⁽¹⁾ | BN9 | 32.000 | 12.90 | 8 | ● |

• For user guide, see pages 132-137

⁽¹⁾ The uncoated fine grain IC08 is available on request

⁽²⁾ Seat size code

⁽³⁾ Number of flutes

Complementary Grades (On Request)


ID5 (PCD) recommended for high speed reaming aluminum (special cases).






RN01 (DLC coating) recommended for reaming the following materials: aluminum alloys (cast, wrought, etc.), brass, bronze and other nonferrous materials.

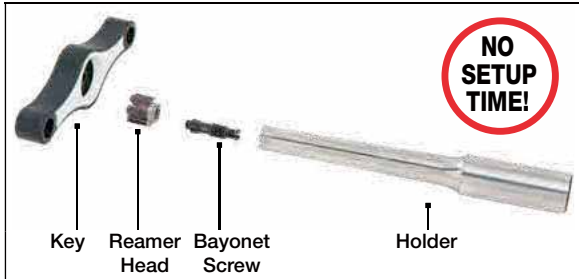


The BAYO-T-REAM Line Is Available in 5 Sizes

Each size has its own diameter range and holder.
 For example:
 The same RM-BN7 holder can hold any head between Ø16.001–20.000 mm



| RM-BN9 | RM-BN8 | RM-BN7 | RM-BN6 | RM-BN5 |
|---|---|---|---|---|
|  |  |  |  |  |
| Ø25.401-32.000 mm | Ø20.001-25.400 mm | Ø16.001-20.000 mm | Ø13.501-16.000 mm | Ø11.500-13.500 mm |

| Through Hole | Blind Hole |
|--------------|------------|
|--------------|------------|

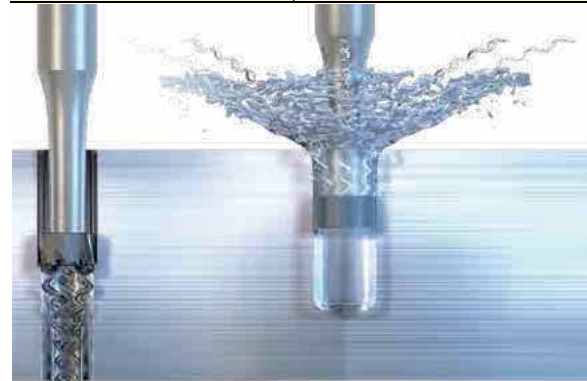

| | |
|--|--|
| <p>Left-Hand Flute The left-hand spiral is designed especially for through hole reaming. Due to this design, the chips are being pushed forward immediately after formation.</p> | <p>Straight Flute The coolant flow assists the chip evacuation process. It directs the just-formed chips backwards. The chips pass through the straight flutes and are thrown out of the hole, without causing any damage to the reamer or hole surface.</p> |
|--|--|

Recommended Cutting Conditions for BAYO-T-REAM High Speed Reaming Heads

| ISO | Material | Condition | Material No. ⁽¹⁾ | Through Hole | | | | Interrupted Through Hole | | | |
|-------------|-------------------------|------------------------------|-----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| | | | | First Choice | | Second Choice | | First Choice | | Second Choice | |
| N | aluminum-wrought alloys | not hardenable | 21 | RN01 | LG or SG | ID5 | SG | RN01 | LG | ID5 | SG |
| | | hardenable | 22 | V _c = 150 - 400 | | V _c = 200 - 500 | | V _c = 150 - 350 | | V _c = 200 - 500 | |
| | aluminum-cast alloys | not hardenable | 23 | V _c = 150 - 400 | | V _c = 200 - 500 | | V _c = 150 - 350 | | V _c = 200 - 500 | |
| | | hardenable | 24 | BN4 - BN6 | f _z = 0.08 - 0.16 | BN4 - BN6 | f _z = 0.08 - 0.2 | BN4 - BN6 | f _z = 0.08 - 0.16 | BN4 - BN6 | f _z = 0.08 - 0.2 |
| | | high temperature | 25 | BN7 - BN9 | f _z = 0.10 - 0.20 | BN7 - BN9 | f _z = 0.11 - 0.24 | BN7 - BN9 | f _z = 0.10 - 0.20 | BN7 - BN9 | f _z = 0.11 - 0.24 |
| | copper alloys | free cutting | 26 | IC30N | SA or SG | IC08 | SG or SA | IC08 | SG or SA | | |
| | | brass | 27 | BN4 - BN6 | f _z = 0.05 - 0.16 | BN4 - BN6 | f _z = 0.04 - 0.13 | BN4 - BN6 | f _z = 0.04 - 0.13 | | |
| | | electrolytic copper | 28 | BN7 - BN9 | f _z = 0.04 - 0.20 | BN7 - BN9 | f _z = 0.05 - 0.16 | BN7 - BN9 | f _z = 0.05 - 0.16 | | |
| | non metallic | duroplastics, fiber plastics | 29 | IC908 | SA | IC908 | LB | IC908 | SA | IC908 | LB |
| | | | | V _c = 25 - 80 | | V _c = 25 - 80 | | V _c = 25 - 80 | | V _c = 25 - 80 | |
| hard rubber | | 30 | BN4 - BN6 | f _z = 0.05 - 0.10 | BN4 - BN6 | f _z = 0.05 - 0.12 | BN4 - BN6 | f _z = 0.05 - 0.10 | BN4 - BN6 | f _z = 0.05 - 0.12 | |
| | | | BN7 - BN9 | f _z = 0.10 - 0.20 | BN7 - BN9 | f _z = 0.10 - 0.23 | BN7 - BN9 | f _z = 0.10 - 0.20 | BN7 - BN9 | f _z = 0.10 - 0.23 | |


- * Standard edge geometries are not suitable for reaming titanium and high temperature alloys. In order to choose a proper geometry, please ask for our recommendations.
- The given cutting data recommendations refer to the short holders (3xD effective reaming overhang). • For longer holders, the cutting speed should be reduced proportionally.
- For relatively large leading angles (spot-facing geometries), the feed should be reduced up to 30%.
- All the given cutting data recommendations refer to the machines with spindle through coolant supply.
- ⁽¹⁾ For workpiece materials list, see pages 160-163.



INTERCHANGEABLE HIGH PRECISION REAMING HEADS

| Material No. | Blind Hole | | | | Interrupted Blind Hole | | | | IC08 |
|--------------|-----------------------------------|------------------------------|-----------------------------------|------------------------------|-----------------------------------|------------------------------|-----------------------------------|------------------------------|--|
| | First Choice | | Second Choice | | First Choice | | Second Choice | | Through Hole - LB Blind Hole - SA |
| 21 | RN01 | SG or SA | ID5 | SG or SA | RN01 | SG or SA | ID5 | SG or SA | V _c = 10 - 30 |
| 22 | V _c = 150 - 400 | | V _c = 200 - 400 | | V _c = 150 - 300 | | V _c = 200 - 400 | | |
| 23 | | | | | | | | | |
| 24 | BN ₄ - BN ₆ | f _z = 0.08 - 0.16 | BN ₄ - BN ₆ | f _z = 0.08 - 0.16 | BN ₄ - BN ₆ | f _z = 0.07 - 0.15 | BN ₄ - BN ₆ | f _z = 0.08 - 0.16 | BN ₄ - BN ₆ f _z = 0.05 - 0.12 |
| 25 | BN ₇ - BN ₉ | f _z = 0.11 - 0.20 | BN ₇ - BN ₉ | f _z = 0.11 - 0.24 | BN ₇ - BN ₉ | f _z = 0.11 - 0.20 | BN ₇ - BN ₉ | f _z = 0.11 - 0.24 | BN ₇ - BN ₉ f _z = 0.08 - 0.15 |
| 26 | IC30N | SG or SA | IC08 | SG or SA | IC08 | SG or SA | | | V _c = 30 - 100 |
| | V _c = 180 - 240 | | V _c = 30 - 100 | | V _c = 30 - 100 | | | | |
| 27 | BN ₄ - BN ₆ | f _z = 0.05 - 0.16 | BN ₄ - BN ₆ | f _z = 0.04 - 0.13 | BN ₄ - BN ₆ | f _z = 0.04 - 0.13 | | | BN ₄ - BN ₆ f _z = 0.04 - 0.13 |
| 28 | BN ₇ - BN ₉ | f _z = 0.05 - 0.21 | BN ₇ - BN ₉ | f _z = 0.05 - 0.16 | BN ₇ - BN ₉ | f _z = 0.05 - 0.16 | | | BN ₇ - BN ₉ f _z = 0.05 - 0.16 |
| 29 | IC908 | SA | | | IC908 | SA | | | V _c = 10 - 20 |
| | V _c = 25 - 80 | | | | V _c = 25 - 80 | | | | |
| 30 | BN ₄ - BN ₆ | f _z = 0.05 - 0.10 | | | BN ₄ - BN ₆ | f _z = 0.05 - 0.10 | | | BN ₄ - BN ₆ f _z = 0.05 - 0.12 |
| | BN ₇ - BN ₉ | f _z = 0.10 - 0.20 | | | BN ₇ - BN ₉ | f _z = 0.10 - 0.20 | | | BN ₇ - BN ₉ f _z = 0.08 - 0.16 |

Legend:



ATTENTION: Cutting tools can break during use. To avoid injury always use safety precautions such as gloves, shields and eye protection.


Assembly Instructions (BN5-BN9)

First Assembly


- Clean the toolholder pocket (fig. 1).
- Clean the reamer head clamping cone.
- Insert the clamping screw into the holder and rotate it 2-3 turns in a clockwise direction (fig. 2).
- Clamp the reaming head on the screw; note, BN8 and BN9 can be assembled only in a specific position relative to the screw (rotate the head until locating the correct position) (fig. 3).
- Manually rotate the reaming head until it sits firmly in the pocket.
- Tighten with the special key (fig. 4).
- Make sure there is no face gap between the toolholder and the reaming head (fig. 5).

Indexing

- Release the reaming head with the key, turning in a counterclockwise direction until it rotates freely.
- Rotate another one turn by hand.
- Remove the reamer head from the tool; the clamping screw should remain inside.
- Clean the pocket of the toolholder (fig. 1).
- Clean the cone on the new reamer head.
- Clamp the reaming head on the screw; note, BN8 and BN9 can be assembled only in a specific position relative to the screw (rotate the head until locating the correct position) (fig. 3).
- Manually rotate the reaming head. In the beginning it should rotate without the screw and then (after 1/6 of a turn) it should engage with the screw. Rotate until it sits firmly in the pocket. If the screw rotates together with the reaming head from the beginning, remove the reaming head and open the screw another one turn.
- Tighten with the special key (fig. 4).
- Make sure that there is no face gap between the toolholder and the reaming head (fig. 5).

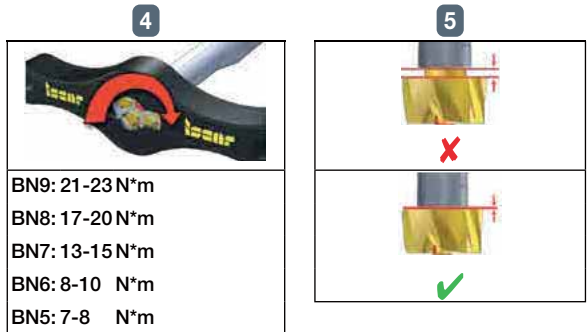

- BN9: 21-23 N*m
- BN8: 17-20 N*m
- BN7: 13-15 N*m
- BN6: 8-10 N*m
- BN5: 7-8 N*m

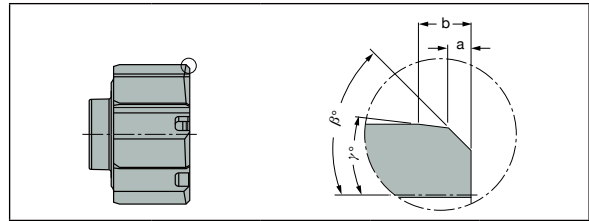

| Lead Code / Parameter | B° | A [mm] | G° | B [mm] |
|-----------------------|---------------------------------|--------|----|--------|
| A | 45° | 0.5 | - | - |
| B | 25° | 1.07 | - | - |
| C | 45° | 0.5 | 8° | 0.75 |
| D | 30° | 0.5 | 4° | 1.85 |
| E | 45° | 0.2 | - | - |
| F | 90° | - | - | - |
| G | 75° | 0.15 | - | - |
| X | specially tailored (undesigned) | | | |


When choosing a reamer, it is important to select a lead geometry that covers the reaming allowance

Reaming Allowance

Reaming allowance is the stock material which should be removed by reaming. It is recommended to leave different reaming allowances depending on the workpiece material and the pre-hole quality. Pre-hole should be smooth and straight, without deep scratches on it.

Complementary Grades (on Request):



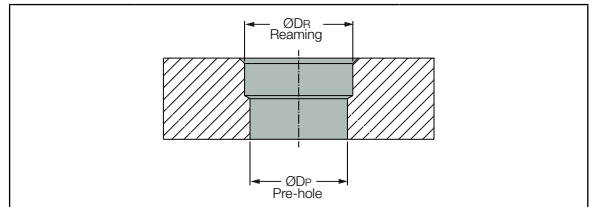




ID5 (PCD) recommended for high speed reaming of aluminum (special cases). RN01 (DLC coating) recommended for reaming the following materials: aluminum alloys (cast, wrought, etc.), brass, bronze and other nonferrous materials.










| Material | Hole Ø mm | | | | | | mm/Ø |
|--------------------|-----------|------------|-------------|-----------|-----------|-----------|------|
| | < 9.5 | 9.5 - 11.5 | 11.5 - 13.5 | 13.5 - 16 | 16 - 32 | >32 | |
| Aluminum and Brass | 0.07-0.10 | 0.10-0.15 | 0.15-0.25 | 0.20-0.30 | 0.20-0.40 | 0.20-0.50 | |

Δ - Reaming allowance

$\Delta = \text{ØDR} - \text{ØDP}$

| solutions | |  | Cutting Data/ Allowance | | | Tool; Toolholder | | | | | Workpiece | Machine | | Machining Process | | | | | | |
|--------------------------|---|---|-------------------------|---------------------------------|--------------------|------------------|--------------------|----------------------------|-----------------------------------|---------------------|----------------------------|------------------------------|-----------------|-------------------|--|------------------------|---|----------------------|-----------------|---|
| | | | Feed FZ | Spindle Speed Min ⁻¹ | Diameter Allowance | Geometry Angle | Runout Maximum 5µm | Wear Check / Change Insert | Optimize Tool Length and Diameter | Floating Chuck GFIS | ADJ Chuck FineFit/ RC RING | Workpiece Fixture / Pressure | Coolant Mixture | Coolant Pressure | Angle Error / Centric Error / Axis Deviation | Spindle Speed on Entry | Entry Geometry / Chamfer / Oblique Surface At Entry | Feed in and Out Same | Chip Evacuation | |
| hole too large |  | vibration | ● | | | ● | | | | | ● | ● | ● | | ● | ● | | | | |
| | | runout error | | | | | ● | | ● | ● | | | | | | | | | | |
| | | built up edge | ● | ● | ● | | | ● | | | | | | | | ● | | | | |
| | | diameter allowance | | | ● | | | | | | | | | | | | | | | ● |
| hole too small |  | tool wear | | | | | ● | | | | ● | ● | ● | ● | | ● | | | | |
| | | compression of material | | | | ● | | ● | | | | | | | | | ● | ● | | |
| | | compression of clamping | | | ● | ● | | | | | | | | | | | | | | |
| | | diameter allowance | | | ● | | | | | | | | | | | | | | | |
| tapered hole |  | deformation by clamping | | | ● | | | | | | ● | ● | | | | | | | | |
| | | unequal wall thickness | | | ● | ● | | | | | | | | | | | | | | |
| problem |  | machine | | | | ● | | ● | ● | ● | | | | ● | | | | | | |
| | | chip flow | | | | | | | | | | ● | ● | | | | | | ● | |
| hole shows chatter marks |  | vibration | ● | ● | ● | ● | | ● | | | ● | ● | ● | | ● | ● | | | | |
| | | runout error | | | | | ● | | ● | ● | | | | ● | | | | | | |
| insufficient surface |  | vibration | ● | ● | | ● | | ● | ● | | ● | ● | ● | | ● | ● | | | | |
| | | built up edge | ● | ● | | | | ● | | | | ● | ● | | | | | | | |
| | | runout error | | | | | ● | | ● | ● | | | | | | | | | | |
| | | cutting geometry | | | | | | ● | ● | | | | | | | | | | | ● |
| | | machine | | | | | | | | | ● | ● | | ● | | | | | | |

| solutions | Cutting Data/ Allowance | | | Tool; Toolholder | | | | | Workpiece | Machine | | Machining Process | | | | | |
|--|---|---------------------------------|--------------------|------------------|--------------------|-------------------------------|--------------------------------------|---------------------|-------------------------------|---------------------------------|-----------------|-------------------|---|------------------------|--|----------------------|-----------------|
| | Feed FZ | Spindle Speed Min ⁻¹ | Diameter Allowance | Geometry Angle | Runout Maximum 5µm | Wear Check / Change Insert | Optimize Tool Length and Diameter | Floating Chuck GFIS | ADJ Chuck FineFit/ RC RING | Workpiece Fixture / Pressure | Coolant Mixture | Coolant Pressure | Angle Error / Centric Error / Axis Deviation | Spindle Speed on Entry | Entry Geometry / Chamfer / Oblique Surface At Entry | Feed in and Out Same | Chip Evacuation |
| retraction marks |  | ● | ● | | ● | ● | ● | ● | ● | | ● | | | | ● | | |
| |  | | | ● | ● | | | | | ● | | | | | ● | ● | |
| |  | | | | | | | | | | | | | | | | |
| problem slight defect in shape / noncircular hole |  | | | ● | | ● | | | | | | | | | | | ● |
| |  | | | ● | | | | | | | ● | ● | | | | | ● |
| |  | | | | ● | ● | | ● | ● | | | | ● | | ● | ● | ● |
| |  | | | ● | | | | | | ● | | | | | | | |

- check / optimize
- increase / improve
- reduce / decrease
- apply / use




Brazed Polycrystalline Diamond Reamer

ISCAR PCD LINE

RMSP-T

Brazed Polycrystalline Diamond Reamer with Internal Coolant for High-Speed Reaming of Through Holes in Aluminum

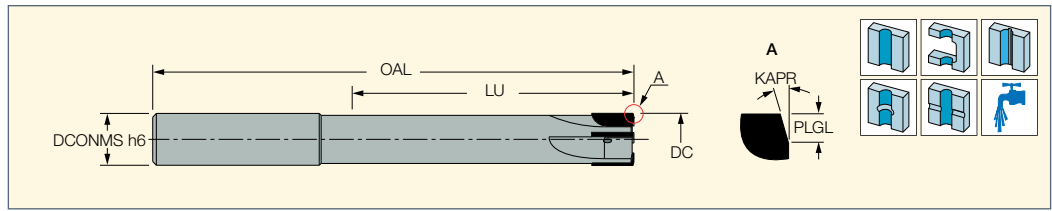

| Designation | DC | DCONMS | OAL | LU | CICT ⁽¹⁾ | PLGL | KAPR ⁽²⁾ |
|--------------------|-------|--------|--------|--------|---------------------|-------|---------------------|
| RMSP-T-D06.000-K05 | 6.00 | 6.00 | 79.00 | 39.00 | 2 | 1.000 | 15.0 |
| RMSP-T-D08.000-K05 | 8.00 | 8.00 | 92.00 | 52.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D10.000-K05 | 10.00 | 10.00 | 106.00 | 62.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D12.000-K10 | 12.00 | 12.00 | 124.00 | 74.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D14.000-K10 | 14.00 | 14.00 | 135.00 | 85.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D16.000-K10 | 16.00 | 16.00 | 150.00 | 97.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D18.000-K10 | 18.00 | 18.00 | 164.00 | 97.00 | 4 | 1.000 | 15.0 |
| RMSP-T-D20.000-K10 | 20.00 | 20.00 | 164.00 | 100.00 | 4 | 1.000 | 15.0 |


⁽¹⁾ Number of inserts

⁽²⁾ Tool cutting edge angle

ISCAR PCD LINE

RMSP-B

Brazed Polycrystalline Diamond Reamer with Internal Coolant for High-Speed Reaming of Blind Holes in Aluminum

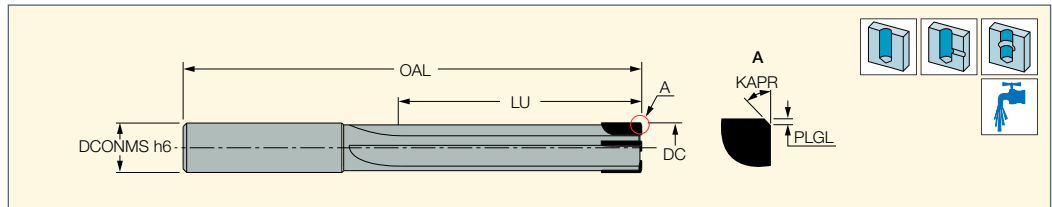

| Designation | DC | DCONMS | OAL | LU | CICT ⁽¹⁾ | PLGL | KAPR ⁽²⁾ |
|--------------------|-------|--------|--------|--------|---------------------|-------|---------------------|
| RMSP-B-D06.000-C02 | 6.00 | 6.00 | 79.00 | 30.00 | 2 | 0.200 | 45.0 |
| RMSP-B-D08.000-C02 | 8.00 | 8.00 | 92.00 | 40.00 | 4 | 0.200 | 45.0 |
| RMSP-B-D10.000-C04 | 10.00 | 10.00 | 106.00 | 50.00 | 4 | 0.400 | 45.0 |
| RMSP-B-D12.000-C04 | 12.00 | 12.00 | 125.00 | 60.00 | 4 | 0.400 | 45.0 |
| RMSP-B-D14.000-C04 | 14.00 | 14.00 | 135.00 | 73.00 | 4 | 0.400 | 45.0 |
| RMSP-B-D16.000-C04 | 16.00 | 16.00 | 150.00 | 80.00 | 4 | 0.400 | 45.0 |
| RMSP-B-D18.000-C04 | 18.00 | 18.00 | 164.00 | 90.00 | 4 | 0.400 | 45.0 |
| RMSP-B-D20.000-C04 | 20.00 | 20.00 | 164.00 | 100.00 | 4 | 0.400 | 45.0 |

⁽¹⁾ Number of inserts

⁽²⁾ Tool cutting edge angle

Recommended Cutting Parameters for Reamers

The below cutting data are purely an indication and are calculated assuming optimal working conditions; they can depend on stability of the fixture, the machine and the workpiece.

For more detailed information and for choosing the best grade, you should contact **ISCAR PCD's** offices.


| Material | Hole Type | Grade | V _c (m/min) | F _z (mm/z) |
|-----------------------------------|-----------|------------|------------------------|-----------------------|
| Aluminum Casting Alloys (Si <12%) | Through | PCD | 300÷500 | 0.05÷0.18 |
| Aluminum Casting Alloys (Si >12%) | Through | PCD | 300÷500 | 0.04÷0.14 |
| Copper, Bronze, Brass Alloys | Through | PCD | 300÷500 | 0.03÷0.08 |
| Magnesium Alloys | Through | PCD | 300÷500 | 0.06÷0.16 |
| Graphite | Through | PCD | 300÷500 | 0.06÷0.16 |
| Aluminum Casting Alloys (Si <12%) | Blind | PCD | 300÷500 | 0.03÷0.09 |
| Aluminum Casting Alloys (Si >12%) | Blind | PCD | 300÷500 | 0.02÷0.07 |
| Copper, Bronze, Brass Alloys | Blind | PCD | 300÷500 | 0.015÷0.04 |
| Magnesium Alloys | Blind | PCD | 300÷500 | 0.03÷0.08 |



ITS Bore Indexable Inserts

ISOTURN


CCMT/CCGT-SM
Single-Sided Turning Inserts for Semi-Finishing and Finishing of Soft Materials and Exotic Alloys

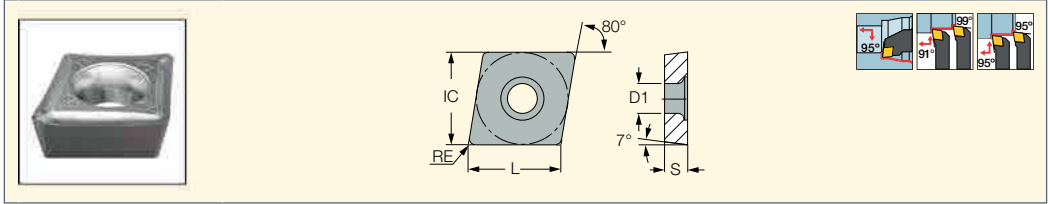

| Designation | Dimensions | | | | | Tough ↔ Hard | | | | | | | | | Recommended Machining Data | | | |
|----------------|------------|-------|------|------|------|--------------|--------|--------|--------|------|--------|-------|--------|-------|----------------------------|-------|---------------------|------------|
| | L | IC | S | RE | D1 | IC6025 | IC8250 | IC6015 | IC8150 | IC20 | IC5010 | IC428 | IC5005 | IC806 | IC807 | IC907 | a _p (mm) | f (mm/rev) |
| CCGT 060201-SM | 6.45 | 6.35 | 2.38 | 0.10 | 2.80 | | | | | | | | | | | ● | 0.25-2.00 | 0.05-0.20 |
| CCGT 060202-SM | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | | | | | | | | | | | ● | 0.25-2.00 | 0.05-0.25 |
| CCMT 060202-SM | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | | ● | | ● | | | | | ● | | | 0.25-2.00 | 0.05-0.25 |
| CCMT 060204-SM | 6.45 | 6.35 | 2.38 | 0.40 | 2.80 | ● | ● | ● | ● | | | | | ● | ● | ● | 0.50-2.50 | 0.07-0.25 |
| CCMT 060208-SM | 6.45 | 6.35 | 2.38 | 0.80 | 2.80 | ● | ● | ● | ● | | | | | ● | ● | ● | 0.50-2.50 | 0.07-0.25 |
| CCMT 09T302-SM | 9.70 | 9.52 | 3.97 | 0.20 | 4.40 | ● | ● | ● | | | | | | ● | ● | ● | 0.50-2.50 | 0.06-0.25 |
| CCMT 09T304-SM | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | 0.50-2.50 | 0.06-0.25 |
| CCMT 09T308-SM | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | 0.50-3.00 | 0.07-0.25 |
| CCMT 120404-SM | 12.90 | 12.70 | 4.76 | 0.40 | 5.50 | | ● | ● | ● | | | | | ● | ● | ● | 0.70-3.50 | 0.07-0.25 |
| CCMT 120408-SM | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | ● | ● | ● | | | | | | ● | ● | 0.70-3.50 | 0.07-0.30 |

ISOTURN


CCMT-14
80° Rhombic Inserts with a 7° Positive Flank for Semi-Finish and Finish Turning

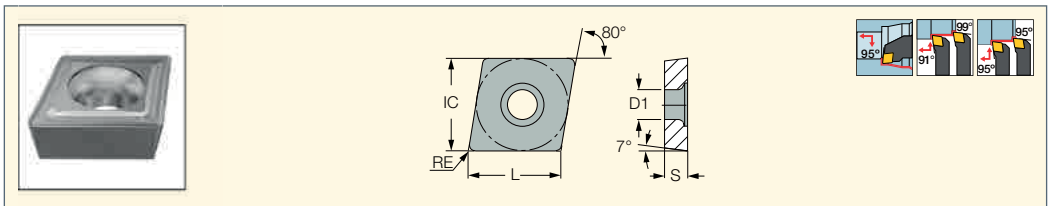

| Designation | Dimensions | | | | | Tough ↔ Hard | | | | | | Recommended Machining Data | | |
|----------------|------------|-------|------|------|------|--------------|--------|------|-------|--------|-------|----------------------------|---------------------|------------|
| | L | IC | S | RE | D1 | IC880 | IC8250 | IC20 | IC428 | IC5005 | IC807 | IC907 | a _p (mm) | f (mm/rev) |
| CCMT 060204-14 | 6.30 | 6.35 | 2.38 | 0.40 | 2.80 | ● | | ● | ● | ● | ● | ● | 0.50-2.50 | 0.14-0.25 |
| CCMT 09T304-14 | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | ● | ● | ● | ● | ● | ● | ● | 0.50-3.00 | 0.14-0.25 |
| CCMT 09T308-14 | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | ● | ● | ● | ● | ● | ● | 0.80-3.00 | 0.14-0.30 |
| CCMT 120408-14 | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | | ● | | | | | 0.80-3.00 | 0.14-0.30 |

ISOTURN

CCMT/CCGT
80° Rhombic Inserts with a 7° Positive Flank for Semi-Finish and Finish Turning

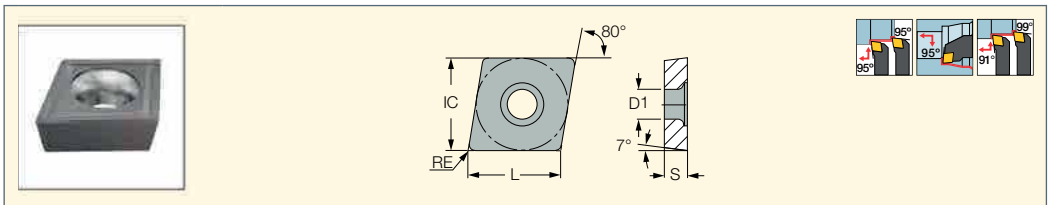

| Designation | Dimensions | | | | | Tough ↔ Hard | | | | | Recommended Machining Data | |
|-----------------------------|------------|------|------|------|------|--------------|-------|------|-------|--------|----------------------------|------------|
| | L | IC | S | RE | D1 | IC8250 | IC30N | IC20 | IC20N | IC520N | a _p (mm) | f (mm/rev) |
| CCGT 060202 | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | | ● | | | | 0.50-2.00 | 0.10-0.20 |
| CCGT 060202L ⁽¹⁾ | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | | ● | ● | | | 0.50-2.00 | 0.10-0.20 |
| CCGT 060204 | 6.45 | 6.35 | 2.38 | 0.40 | 2.80 | | ● | | | | 0.50-2.00 | 0.10-0.20 |
| CCGT 060204L ⁽¹⁾ | 6.45 | 6.35 | 2.38 | 0.40 | 2.80 | | ● | | | | 0.50-2.00 | 0.10-0.20 |
| CCMT 060202 | 6.45 | 6.35 | 2.38 | 0.20 | 2.80 | ● | | | ● | | 0.50-2.00 | 0.10-0.20 |
| CCMT 060204 | 6.45 | 6.35 | 2.38 | 0.40 | 2.80 | | ● | | ● | ● | 0.50-2.00 | 0.12-0.22 |
| CCMT 09T302 | 9.70 | 9.52 | 3.97 | 0.20 | 4.40 | | | | ● | ● | 0.50-2.50 | 0.12-0.25 |
| CCMT 09T304 | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | | | | ● | ● | 0.50-2.50 | 0.12-0.25 |
| CCMT 09T308 | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | | | | ● | ● | 0.80-3.00 | 0.14-0.25 |

● Use left-hand inserts for left-hand external tools and for right-hand internal tools

⁽¹⁾ Left-hand insert

Scan the QR code for additional information.


Enter the item description in the search field to access additional related data.



ISOTURN

CCMT (PCD)

Inserts with a Single PCD Top Corner Tip, 7° Clearance and Positive Rake Angle for Aluminum Finishing

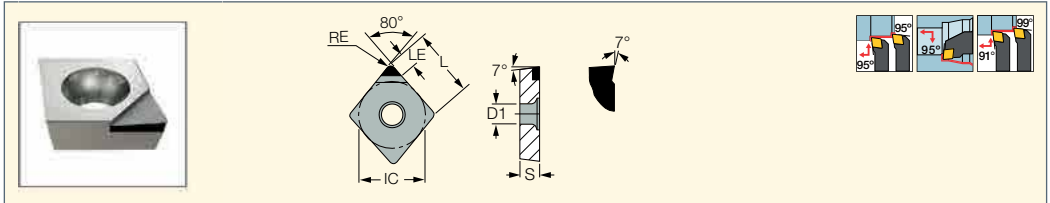


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|--------------|------------|------|------|------|-----|------|-----|----------------------------|------------|
| | L | IC | S | RE | LE | D1 | | a _p (mm) | f (mm/rev) |
| CCMT 060202D | 6.30 | 6.35 | 2.38 | 0.20 | 3.1 | 2.80 | ● | 0.08-3.00 | 0.05-0.30 |
| CCMT 060204D | 6.30 | 6.35 | 2.38 | 0.40 | 3.0 | 2.80 | ● | 0.10-3.00 | 0.05-0.30 |
| CCMT 09T304D | 9.70 | 9.52 | 3.97 | 0.40 | 3.9 | 4.40 | ● | 0.10-3.00 | 0.05-0.30 |

ISOTURN

CCGT-AS

80° Rhombic Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

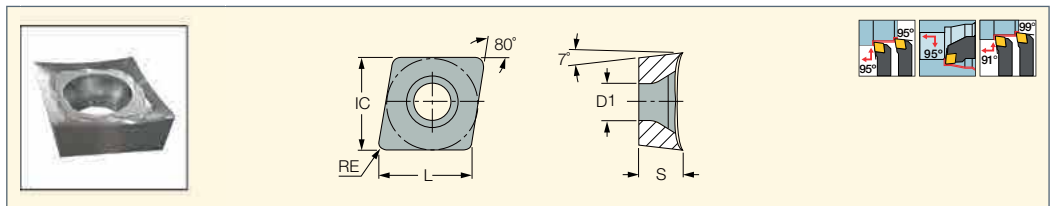


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| CCGT 060201-AS | 6.40 | 6.35 | 2.38 | 0.10 | 2.80 | ● | 0.50-2.00 | 0.10-0.20 | |
| CCGT 060202-AS | 6.40 | 6.35 | 2.38 | 0.20 | 2.80 | ● | 0.50-2.00 | 0.10-0.20 | |
| CCGT 060204-AS | 6.40 | 6.35 | 2.38 | 0.40 | 2.80 | ● | 0.50-2.00 | 0.10-0.25 | |
| CCGT 09T301-AS | 9.70 | 9.52 | 3.97 | 0.10 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T302-AS | 9.70 | 9.52 | 3.97 | 0.20 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T304-AS | 9.70 | 9.52 | 3.97 | 0.40 | 4.40 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 09T308-AS | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.10-0.30 | |
| CCGT 120402-AS | 12.90 | 12.70 | 4.76 | 0.20 | 5.50 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 120404-AS | 12.90 | 12.70 | 4.76 | 0.40 | 5.50 | ● | 0.50-2.50 | 0.10-0.25 | |
| CCGT 120408-AS | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-3.50 | 0.10-0.30 | |

ISOTURN

CCGT-AF

80° Rhombic Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

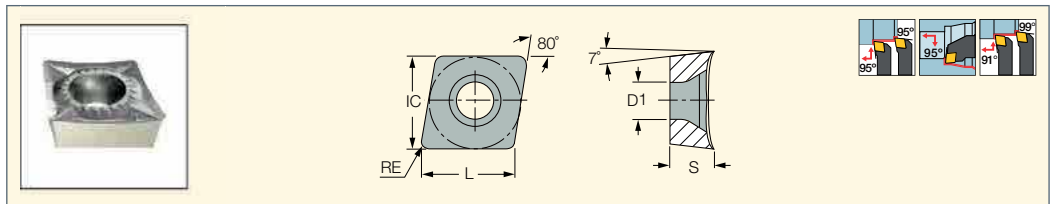


| Designation | Dimensions | | | | | | IC20 | Recommended Machining Data | |
|----------------|------------|-------|------|------|------|---------------------|-----------|----------------------------|--|
| | L | IC | S | RE | D1 | a _p (mm) | | f (mm/rev) | |
| CCGT 09T308-AF | 9.70 | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.80-3.00 | 0.15-0.25 | |
| CCGT 120408-AF | 12.90 | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-3.50 | 0.15-0.30 | |



ISOTURN

SCMT-19

Square Inserts with a 7° Positive Flank for Semi-Roughing at Medium to High Feeds

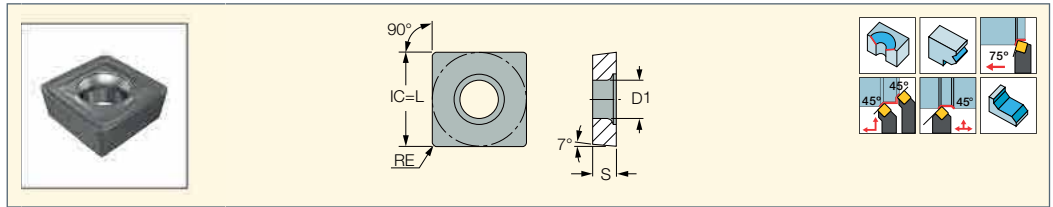


| Designation | Dimensions | | | | Tough ↔ Hard | | | | | Recommended Machining Data | |
|----------------|------------|------|------|------|--------------|------|--------|-------|-------|----------------------------|-------------------------|
| | L | S | RE | D1 | IC830 | IC20 | IC5005 | IC807 | IC907 | a _p (mm) | f _z (mm/rev) |
| SCMT 120408-19 | 12.70 | 4.76 | 0.80 | 5.50 | ● | ● | ● | ● | ● | 3.00-8.00 | 0.08-0.15 |
| SCMT 120412-19 | 12.70 | 4.76 | 1.20 | 5.50 | | ● | | | | 3.00-8.00 | 0.08-0.15 |

● First choice grade

ISOTURN

SCGT-AS

Square Inserts with a 7° Positive Flank, Very Positive Rake Angle and Sharp Cutting Edge for Machining Aluminum

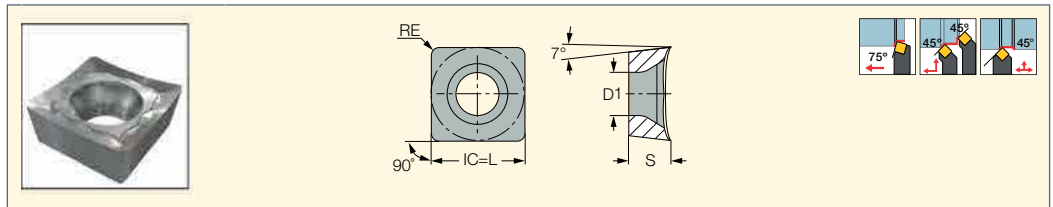


| Designation | Dimensions | | | | IC20 | Recommended Machining Data | |
|----------------|------------|------|------|------|------|----------------------------|------------|
| | IC | S | RE | D1 | | a _p (mm) | f (mm/rev) |
| SCGT 09T308-AS | 9.52 | 3.97 | 0.80 | 4.40 | ● | 0.50-3.00 | 0.10-0.30 |
| SCGT 120404-AS | 12.70 | 4.76 | 0.40 | 5.50 | ● | 1.00-4.00 | 0.10-0.30 |
| SCGT 120408-AS | 12.70 | 4.76 | 0.80 | 5.50 | ● | 1.00-4.00 | 0.10-0.30 |

ISOTURN

TPGX

Triangular Inserts with an 11° Positive Flank and Ground Chipformer for Finish Turning

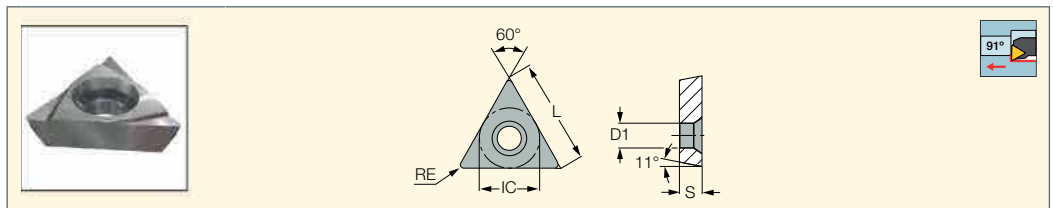

| Designation | Dimensions | | | | | Tough ↔ Hard | | | | | Recommended Machining Data | |
|---------------|------------|------|------|------|------|--------------|-------|------|-------|--------|----------------------------|------------|
| | L | IC | S | RE | D1 | IC54 | IC908 | IC20 | IC20N | IC520N | a _p (mm) | f (mm/rev) |
| TPGX 090202-L | 9.52 | 5.56 | 2.38 | 0.20 | 3.00 | | ● | ● | ● | ● | 1.00-2.00 | 0.10-0.20 |
| TPGX 090204-L | 9.52 | 5.56 | 2.38 | 0.40 | 3.00 | ● | ● | ● | ● | ● | 1.00-2.50 | 0.15-0.20 |
| TPGX 110302-L | 11.00 | 6.35 | 3.18 | 0.20 | 3.50 | | ● | ● | ● | ● | 1.00-2.50 | 0.10-0.20 |
| TPGX 110304-L | 11.00 | 6.35 | 3.18 | 0.40 | 3.50 | ● | ● | ● | ● | ● | 1.00-3.00 | 0.15-0.20 |
| TPGX 110308-L | 11.00 | 6.35 | 3.18 | 0.80 | 3.50 | | | ● | | | 1.00-3.50 | 0.15-0.25 |


● First choice grade



ISOTURN

TPGX (PCD)

Triangular Inserts with PCD
Single Top Corner Braze Tip,
11° Clearance and Positive Rake
Angle for Finishing Aluminum

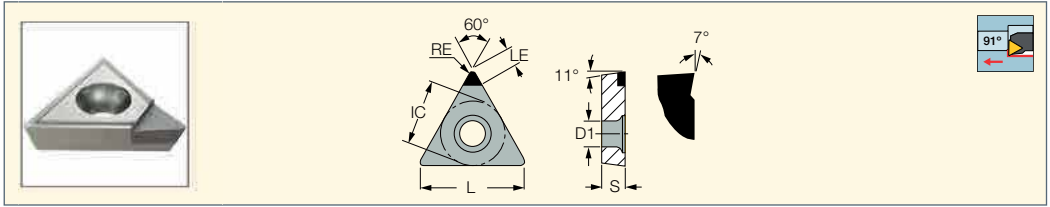


| Designation | Dimensions | | | | | | ID5 | Recommended Machining Data | |
|-------------|------------|------|------|------|-----|------|-----|----------------------------|---------------|
| | L | IC | S | RE | LE | D1 | | a_p (mm) | f (mm/rev) |
| TPGX 090202 | 9.52 | 5.56 | 2.38 | 0.20 | 3.0 | 2.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 090204 | 9.52 | 5.56 | 2.38 | 0.40 | 3.0 | 2.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 110302 | 11.00 | 6.35 | 3.18 | 0.20 | 3.4 | 3.50 | ● | 0.10-3.00 | 0.05-0.30 |
| TPGX 110304 | 11.00 | 6.35 | 3.18 | 0.40 | 3.8 | 3.50 | ● | 0.10-3.00 | 0.05-0.30 |

DR-TWIST

INDEXABLE DRILL LINE

SOGX/T-AL

DR Drill Inserts for Aluminum

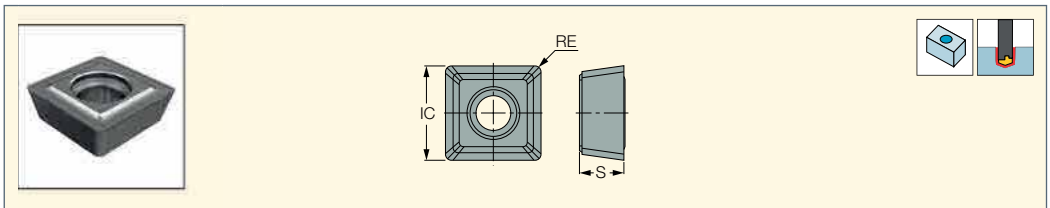

| Designation | Dimensions | | | IC08 |
|----------------|------------|------|------|------|
| | IC | S | RE | |
| SOGX 050204-AL | 5.40 | 2.40 | 0.40 | ● |
| SOGX 060304-AL | 6.20 | 3.20 | 0.40 | ● |
| SOGX 070305-AL | 7.70 | 3.60 | 0.50 | ● |
| SOGT 09T306-AL | 9.00 | 3.81 | 0.60 | ● |
| SOGT 120408-AL | 12.70 | 4.76 | 0.80 | ● |


• Sharp cutting edge with polished rake for aluminum

TANGPLUNGE

PLUNGING LINE

HTP LN.. 1006

Tangentially Clamped Inserts with
4 Cutting Edges for Plungers

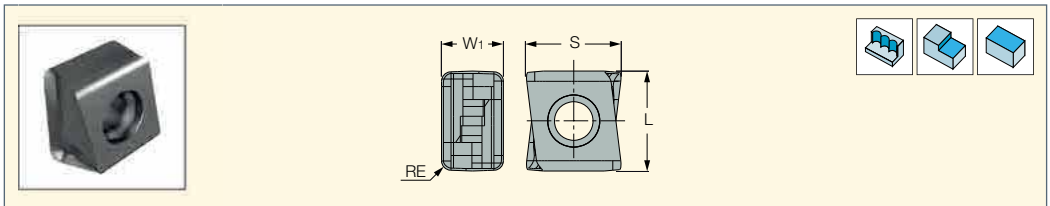


| Designation | Dimensions | | | | Tough ← Hard | | | | | Recommended Machining Data |
|----------------------|------------|-------|-------|------|--------------|-------|-------|-------|------|----------------------------|
| | W1 | L | S | RE | IC330 | IC830 | IC808 | IC810 | IC07 | f_z (mm/t) |
| HTP LNAR 1006 FR (1) | 6.50 | 10.50 | 10.13 | 1.00 | | | ● | | | 0.05-0.15 |
| HTP LNAR 1006 FR-P | 6.50 | 10.50 | 10.13 | 1.00 | | | | | ● | 0.05-0.15 |
| HTP LNHT 1006 ER | 6.50 | 10.50 | 9.93 | 1.00 | ● | | | ● | | 0.10-0.15 |
| HTP LNHT 1006 ETR | 6.50 | 10.50 | 9.93 | 1.00 | ● | ● | ● | | | 0.12-0.20 |
| HTP LNMT 1006 ER (2) | 6.50 | 10.50 | 9.96 | 1.00 | ● | ● | ● | | | 0.08-0.15 |

• FR-P - For machining aluminum, ER- For general applications, ETR- First priority for hardened steel


(1) FR - Sharp cutting edge for unstable conditions and for ISO S material

(2) Mounting this insert increases tool diameter by 0.1 mm


● First choice grade



ER- for general applications



ETR- first priority for hardened steel



FR, FR-P- for machining aluminum



Aluminum Machining Applications



ISCAR'S MACHINING SOLUTIONS FOR
AEROSPACE INDUSTRY



ISCAR'S MACHINING SOLUTIONS FOR
AUTOMOTIVE INDUSTRY



ISCAR'S MACHINING SOLUTIONS FOR
ELECTRIC VEHICLES





Control Valve Mount



Strong Tool Body




High Productivity



Longer Tool Life


The base construction mount holds the temperature control valve. The mount is produced from 6061-T651 aluminum to resist corrosion damage and typically includes milling and drilling machining with high surface finish requirements.

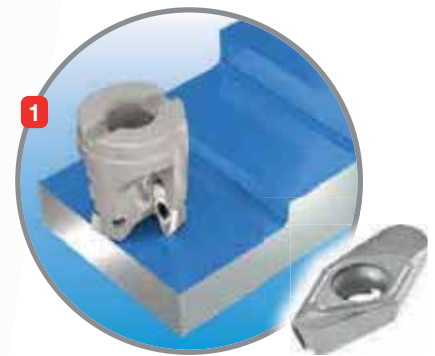

HELIALU
face milling



SOLIDSHRED
rough pocket milling

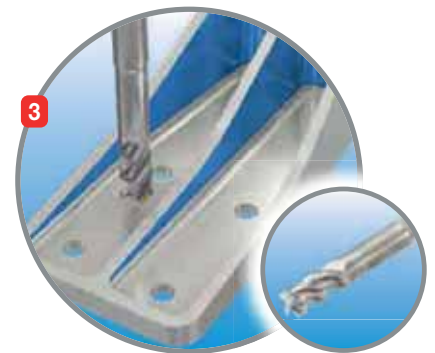


CHATTERFREE
SOLID MILL LINE
finish wall shouldering



MULTI-MASTER
INDEXABLE SOLID CARBIDE LINE
radius pocket milling



PRETHREAD
drilling main base

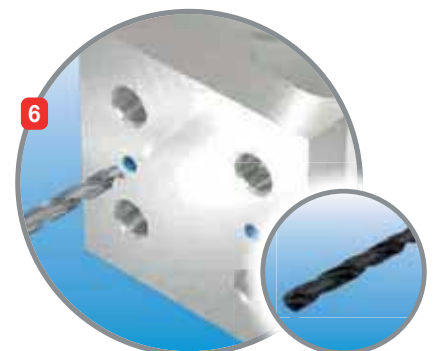

SOLIDDRILL
drilling locating pin



Beam Structure



Strong Tool Body





High Productivity



Longer Tool Life

The beam structure is designed in many sizes and forms and is typically fabricated from Aluminum-wrought alloys such as Al7050. The design includes many cavities and thin walls in purposes to reduce beam weight and keep beam structural strength. The beam production includes applications such as face milling, cavity milling, and drilling.

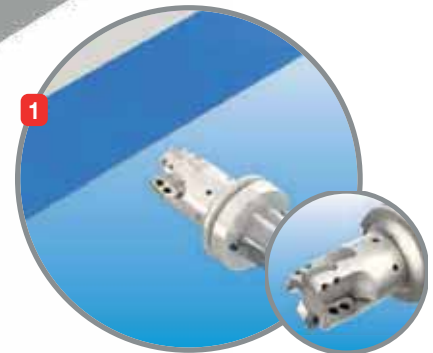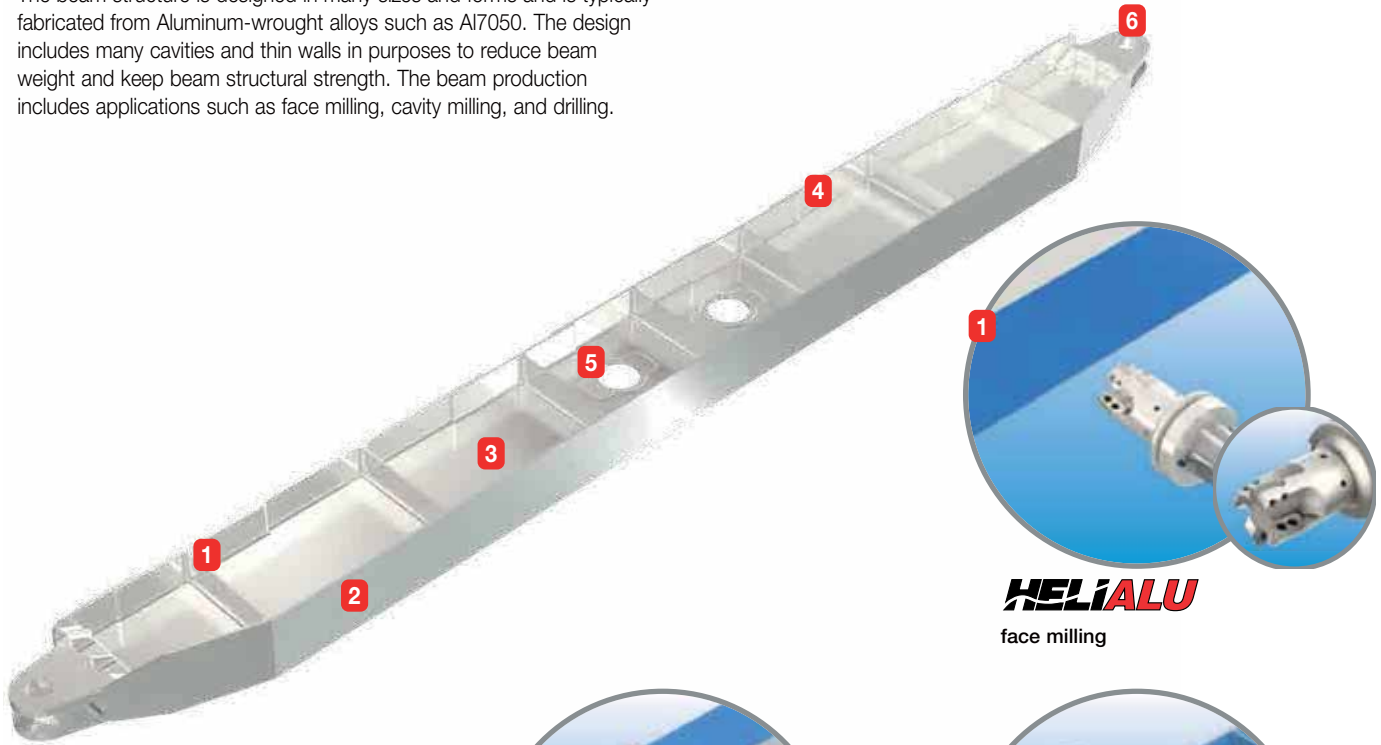


HELIALU

face milling




HELIALU

shoulder milling

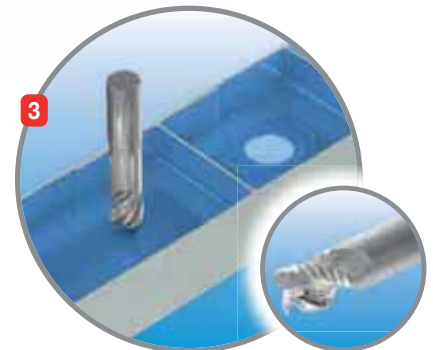

SOLIDMILL
PREMIUM LINE

cavity milling

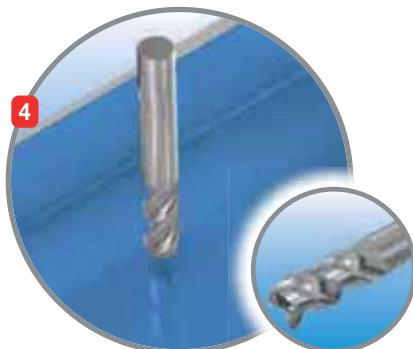

SOLIDMILL
PREMIUM LINE

wall and corner finishing



SOLIDDRILL

drilling cavity area



SUMOCHAM
CHAMDRILL LINE

flange drilling



Cylinder Block



Strong Tool Body




Easy Chip Evacuation



Longer Tool Life

The cylinder block is the supporting structure portion of the engine between the cylinder head and sump (oil pan). It is traditionally manufactured from cast iron and was upgraded to a bi-metal block design (aluminum block with inserted cast iron liners) to reduce weight. Nowadays, newer technology of thermal spray coating processes on the cylinder bore is being used on aluminum blocks.

ISCAR provides a wide range of standard and special tooling machining technologies for a variety of block configurations, sizes and materials.

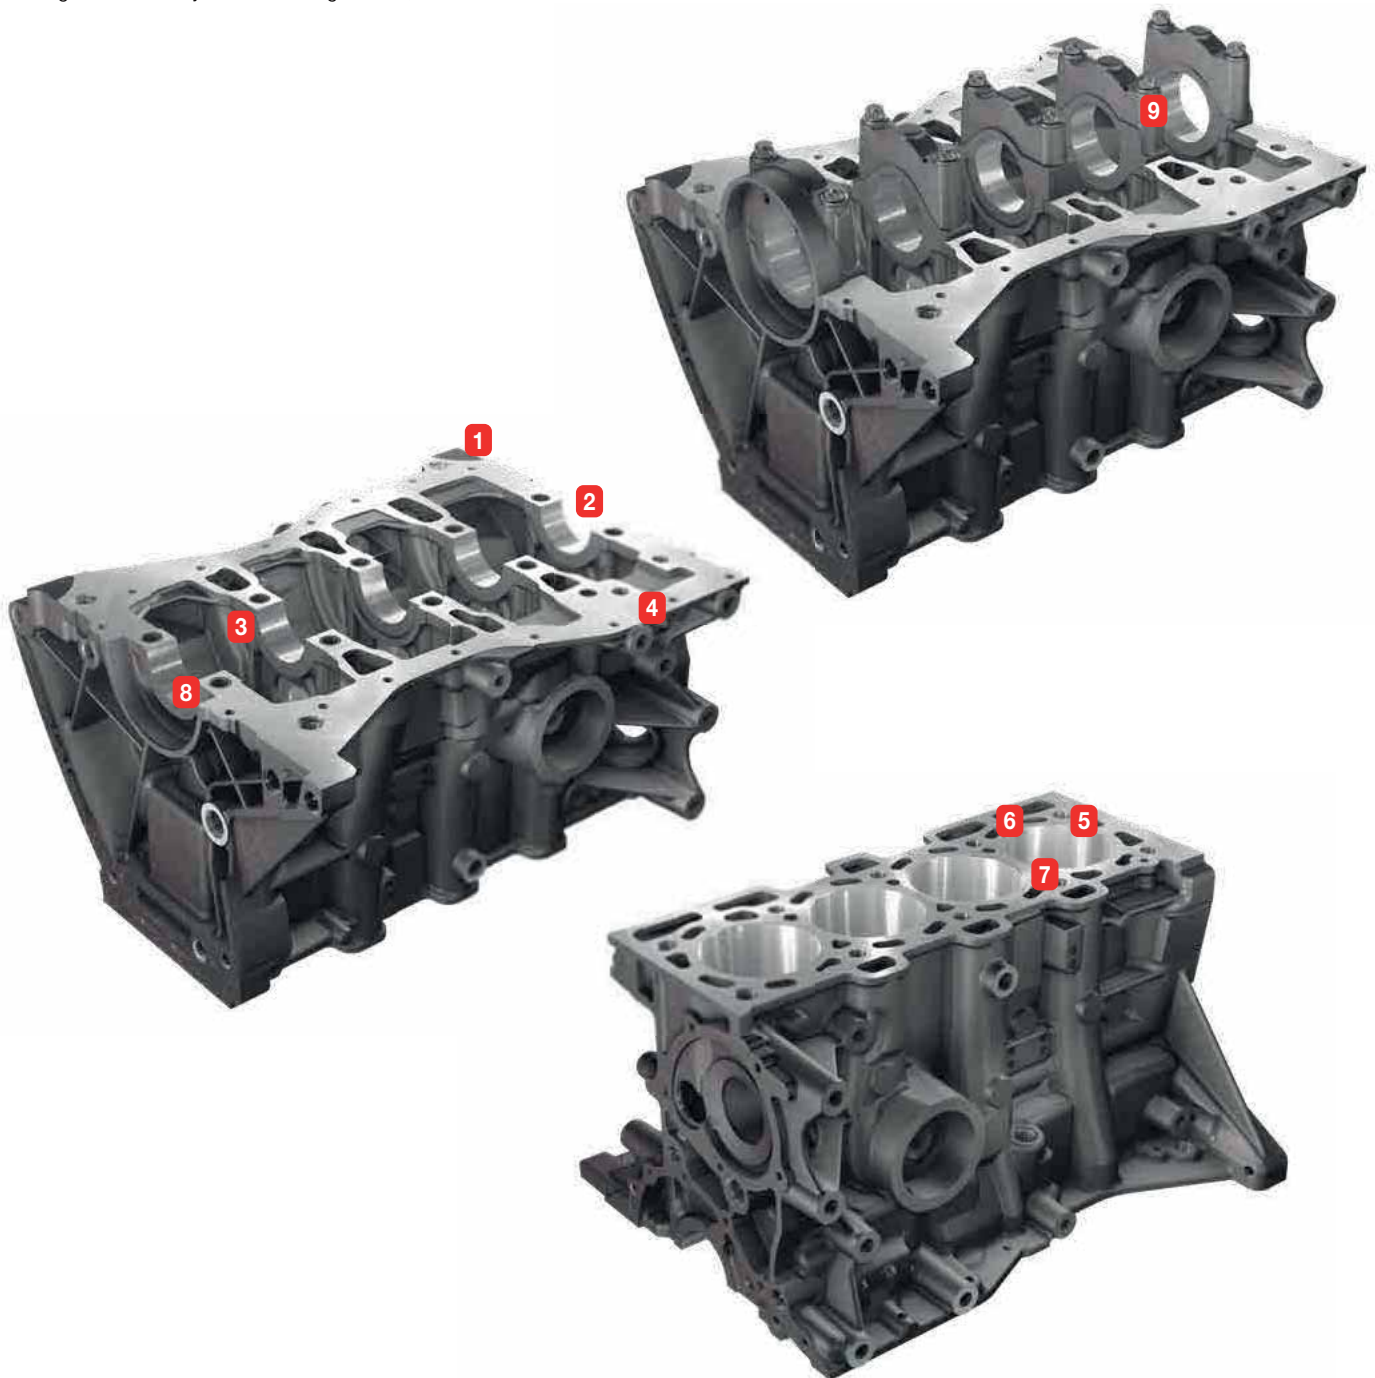



1

HELIDO
800 LINE


engine bottom block
face milling



2

SPECIALLY TAILORED


bearing seats
rough milling

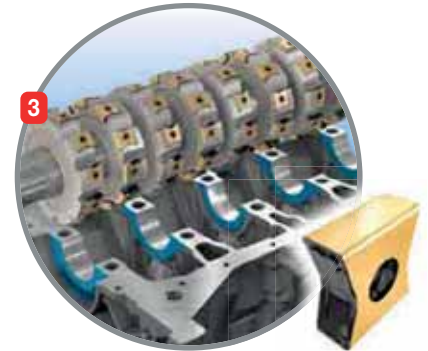

3

TANGMILL
TANGENTIAL LINE


side bearing caps
gang milling

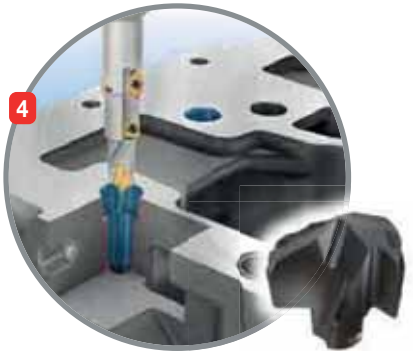

4

SUMOCHAM
CHAMDRILL LINE


bush rods hole
step drilling and chamfering

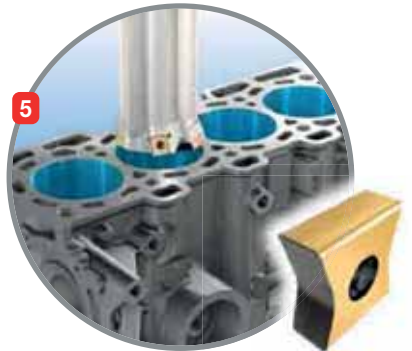

5

TANGMILL
TANGENTIAL LINE


cylinder bore rough boring

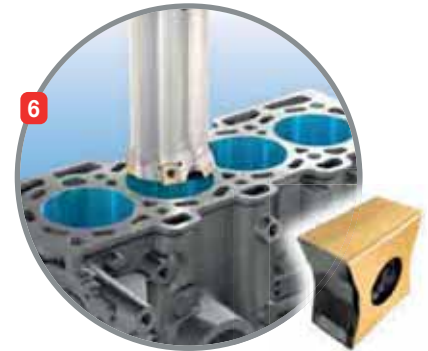

6

TANGMILL
TANGENTIAL LINE


cylinder bore
semi-finish boring

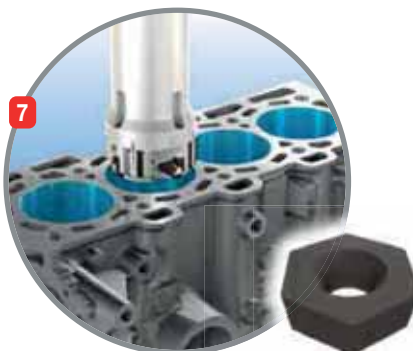

7

ISCARREAMER

cylinder bore finish boring

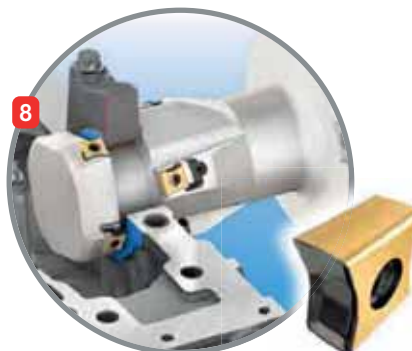

8

TANGMILL
TANGENTIAL LINE

thrust face milling



9

ISCARREAMER

bearing seats pilot reamer
and long reamer finishing



Cylinder Head



Strong Tool Body



Deep Boring




Longer Tool Life

Cylinder heads perform several functions in the car engine. These include the exhaust housing and intake valves, the fuel injector, necessary linkages and passages for fuel and air mixture. They are commonly produced from gray cast iron or cast aluminum for newer light weight vehicles. **ISCAR** provides a wide range of standard and special tooling machining technologies for a variety of cylinder head configurations, sizes and materials.





ALUFRAISE

top and bottom - face milling

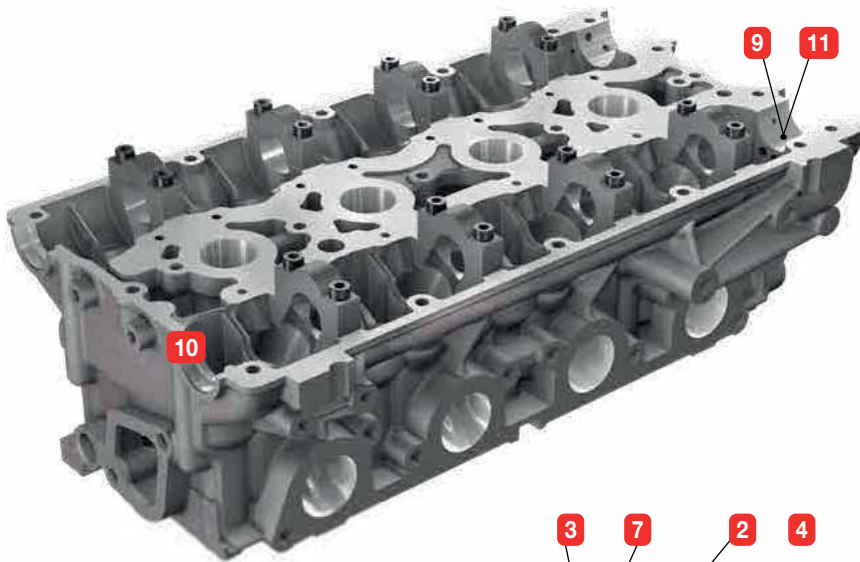

ISCARREAMER

valve line intake (before press in) - boring & spot face

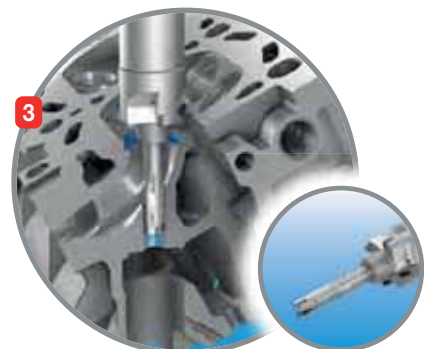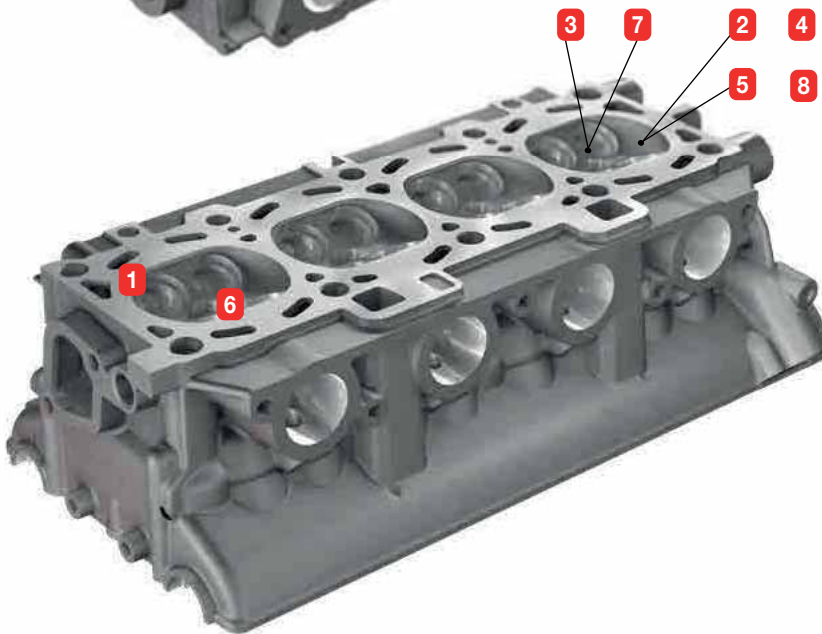


ISCARREAMER

valve line exhaust - boring & spot face




ISCARREAMER

valve line intake and exhaust
(after press in) – semi finish reaming

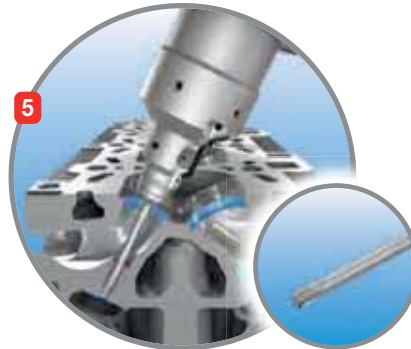

ISCARREAMER

valve line intake and exhaust
(after press in) – finish reaming

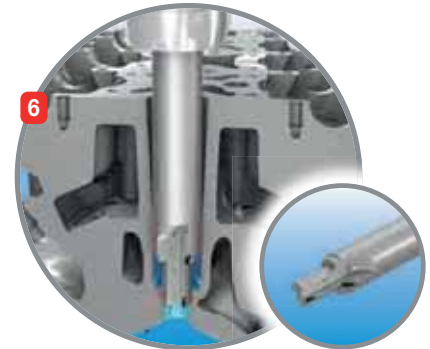

ISCARREAMER

injector hole boring
and spot face




DR-TWIST
INDEXABLE DRILL LINE

spring seat boring
and bottom facing



DR-TWIST
INDEXABLE DRILL LINE

spring seat
back chamfering

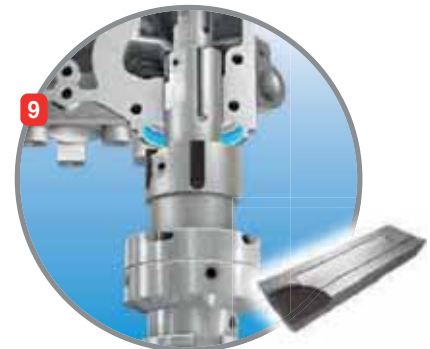

INDEXH-REAM

cam axis inlet
and exhaust reaming



ISCARREAMER

cam shaft axis
pilot boring



ISCARREAMER


cam shaft axis boring
and spot facing



Aluminum Wheels



Easy Chip
Evacuation




High Temperatures
Resistant



High
Productivity

Aluminum wheels are made of magnesium aluminum alloy casting, which typically provides lighter weight with no compromise to structural strength, and often produced with PCD type tooling for roughing and finishing operations. **ISCAR** has developed unique PCD special tools, inserts with chip formers and polished edges for optimized chip formation and prolonged edge life.



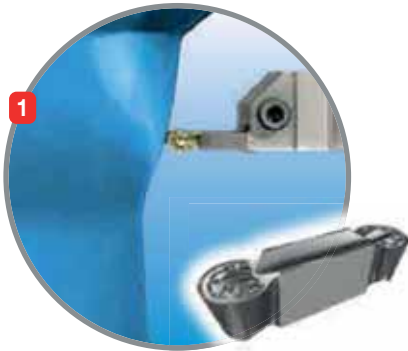

FIXGRIP

outer diameter
grooving and turning



FIXGRIP

inner diameter
grooving and turning



FIXGRIP

undercutting grooving and turning



ISOTURN

bore turning



CHAMDRILLJET

lug hole drilling and chamfering



PRETHREAD

valve hole drilling with rear
and front chamfering




Automotive

Electric Car Motor Housing




Super Finish

High Temperatures
Resistant

PCD Inserts


As batteries are replacing fuel as an energy source for vehicles, the battery case is an integral component of car design. Large size and light weight requirements make aluminum a natural choice for manufacturing this part. **ISCAR** has an arsenal of tools specially designed to machine aluminum and provide productive and economical solutions for any application.



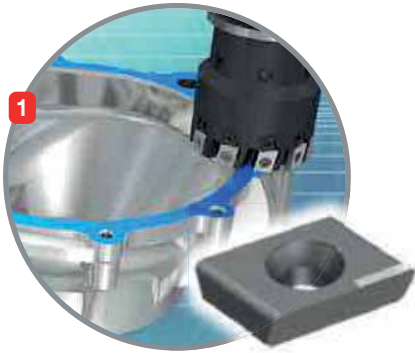

ISCAR PCD LINE

motor housing cover face milling

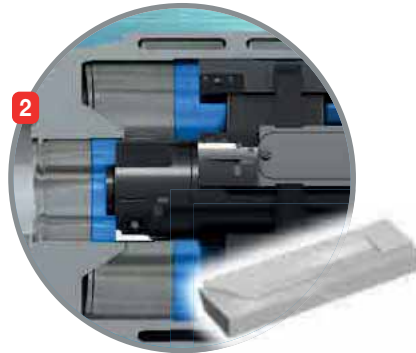


ISCAR PCD LINE

reaming



ISCAR PCD LINE

boring

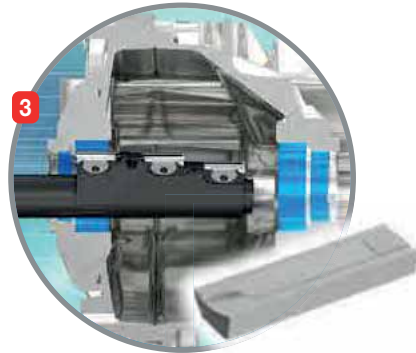

ISCAR PCD LINE

motor housing bearing seat reaming



Automotive

Electric Car Battery Case



Ease of Use



High Productivity



No Setup Time

Battery cases have become an alternative solution to energy in modern car designs. Large size and light weight requirements make aluminum a natural choice for manufacturing this part. **ISCAR** provides a wide choice of tools of tools specially designed to machine aluminum and provide productive and economical solutions for any application.



ALUTANG
face milling



BAYOT-REAM
reaming



SPECIALLY TAILORED
drilling and chamfering
















CHATTERFREE
MULTI-MASTER LINE
face milling

Technical Information








Cutting Material Grades for Machining Aluminum
Main Grades






| | Grade | ISO | Uncoated Layers | Uncoated |
|-----------------|------------|---------|-----------------|---|
| UNCOATED | IC4 | N05-N15 | Base |  |
| | IC07 | N05-N20 | Base |  |
| | IC08 | N10-N25 | Base |  |
| | IC10 | N10-N30 | Base |  |
| | IC20 | N05-N25 | Base |  |
| | IC28 | N15-N30 | Base |  |
| | HE | N01-N30 | Base |  |
| | PCD | ID5 | N01-N10 | Base |
| ID8 | | N05-N15 | Base |  |

| | Grade | ISO | Coating Layers | Coating Color* |
|-------------------|--------|---------|---------------------|---|
| PVD Coated | IC228 | N20-N40 | TiN TiCN Base |  |
| | IC508 | N10-N30 | TiN TiCN Base |  |
| | IC520 | N10-N15 | TiN TiCN Base |  |
| | IC920 | N10-N25 | TiAlN Base |  |
| DLC | IC1508 | N10-N20 | DLC Base |  |











* For coated grades

Complementary Grade










| | Grade | Uncoated Layers | Uncoated |
|-----------------|-------|-----------------|--|
| UNCOATED | IC20N | Base |  |
| | IC30N | Base |  |
| | IC50M | Base |  |
| | IC54 | Base |  |
| | IC70 | Base |  |

| | Grade | Coating Layers | Coating Color* |
|-------------------|-------|---------------------|---|
| PVD Coated | IC250 | TiN TiCN Base |  |
| | IC308 | TiCN Base |  |
| | IC328 | TiCN Base |  |
| | IC330 | TiCN Base |  |
| | IC354 | TiCN Base |  |









* For coated grades

| | Grade | Coating Layers | Coating Color* |
|-------------------|--------|------------------------|---|
| PVD Coated | IC507 | TiN TiCN Base |  |
| | IC520N | TiN TiCN Base |  |
| | IC528 | TiN TiCN Base |  |
| | IC806 | TiAlN AlTiN Base |  |
| | IC807 | TiN TiAlN Base |  |
| | IC807G | TiN TiAlN Base |  |
| | IC808 | TiN TiAlN Base |  |
| | IC808G | TiN TiAlN Base |  |
| | IC810 | TiN AlTiCrN Base |  |
| | IC830 | TiN TiAlN Base |  |

* For coated grades

| Grade | Coating Layers | Coating Color* |
|--------|----------------|---|
| IC903 | AlTiN |  |
| | Base | |
| IC907 | TiAlN |  |
| | Base | |
| IC908 | TiAlN |  |
| | Base | |
| IC928 | AlTiN |  |
| | Base | |
| IC1007 | TiN |  |
| | TiAlN | |
| | Base | |
| IC1008 | TiN |  |
| | TiAlN | |
| | Base | |
| IC1010 | TiN |  |
| | AlTiN | |
| | Base | |
| IC1028 | TiN |  |
| | AlTiCrN | |
| | Base | |
| IC1030 | TiN |  |
| | AlTiN | |
| | Base | |

* For coated grades

| Grade | Coating Layers | Coating Color* |
|--------|--------------------------------|---|
| IC428 | Al ₂ O ₃ |  |
| | TiC | |
| | Base | |
| IC5005 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC5010 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC5400 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC6015 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC6025 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC8150 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |
| IC8250 | TiN |  |
| | Al ₂ O ₃ | |
| | TiCN | |
| | Base | |

* For coated grades

MATERIAL GROUPS

Based on ISO 513 and VDI 3323 Standards

| ISO | Material | Condition | Kc1 ⁽¹⁾ [N/mm ²] | Mc ⁽²⁾ | Hardness HB | Material Group No. | |
|-----|-------------------------|----------------|---|-------------------|-------------|--------------------|----|
| N | aluminum-wrought alloys | not hardenable | 700 | 0.25 | 60 | 21 | |
| | | hardenable | 800 | 0.25 | 100 | 22 | |
| | aluminum-cast alloys | ≤12% Si | not hardenable | 700 | 0.25 | 75 | 23 |
| | | | hardenable | 700 | 0.28 | 90 | 24 |
| | | >12% Si | high temperature | 750 | 0.25 | 130 | 25 |
| | copper alloys | >1% Pb | free cutting | 700 | 0.27 | 110 | 26 |
| | | | brass | 700 | 0.27 | 90 | 27 |
| | | | electrolytic copper | 700 | 0.27 | 100 | 28 |
| | non metallic | | duroplastics, fiber plastics | 200 | 0.20 | 70 shore D | 29 |
| | | | hard rubber | 200 | 0.20 | 55 shore D | 30 |


■ non-ferrous metals


⁽¹⁾ Specific cutting force for 1 mm² chip section







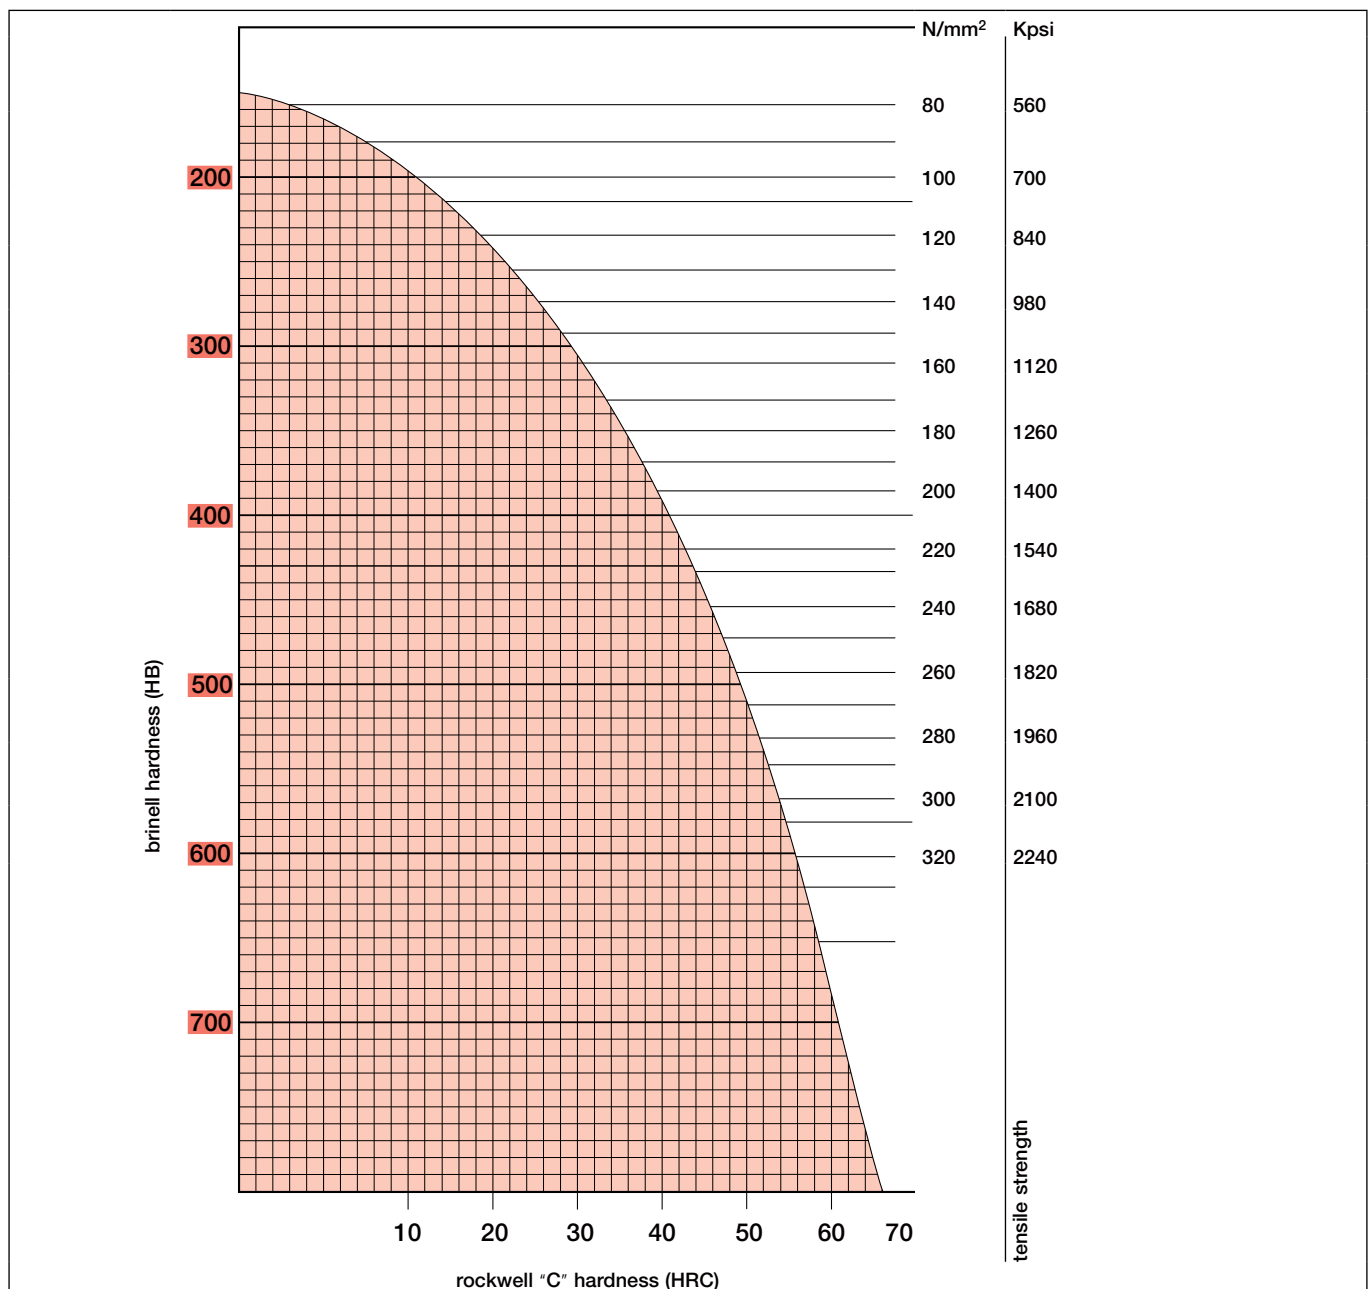



⁽²⁾ Chip thickness factor


MATERIAL GROUPS











Hardness Conversion Table



| Material Group No. |  | | | | | | | | | | |
|--------------------|--|-------------------|--|----------------------|----------|--------|-----------------|--------|-------|---------------|---|
| | USA | Germany | | U.K. | France | Sweden | Italy | Spain | Japan | Russia | Euronorm |
| | AISI/SAE/ UNS/ ASTM/AA | Werkstoff | DIN | BS | AFNOR | SS | UNI | UNE | JIS | GOST | EN |
| 21 | AA5005; AA5006; A95005; A95006; 5005; 5005A; 5006 | 3.3315 | AlMg1; AlMg1C | N41 | A G0-6 | 144106 | L3350 | | A5005 | 1510; AMg1 | AlMg1C; 5005A |
| 21 | AA1050; A91050; 1050; 1050A | 3.0255 | Al99.5; Al99.5 | 1B | A5 | 14407 | 9001/2 | L-3051 | | AD0 | Al99.5; Al99.5; 1050A |
| 21 | AA1200; A91200 ; 1200; 1200A | 3.0205 | Al99.0; Al99.0; Al99 | 1C | A4 | 144010 | Al99.0 | L-3001 | A1200 | A0 | Al99.0; Al99.0; 1200 |
| 22 | AA2017; A92017; 2017; 2017A | 3.1325; 3.1124 | AlCu2.5Si(A); AlCu2.5Si(A); AlCuMg1 | | A-U4G | | | L-3120 | | V65 | AlCu2.5Si(A); AlCu2.5Si(A); 2017A |
| 22 | | 3.2315 | AlMgSi1 | H30 | A-SGM0.7 | 144312 | 9006/4 | L-3453 | | AD35 | AlSiMgMn; 6082 |
| 22 | | 3.4345 | AlZnMgCuO.5; AlZnMgCuO.5 | | | | | | | | AlZnMgCuO.5; AlZnMgCuO.5; 7022 |
| 22 | | 3.1655 | AlCu6BiPb; AlCuBiPb | FC1 | A-U5PbBi | 144355 | 9002/5 | L-3192 | A2011 | | AlCu6BiPb; 2011 |
| 22 | AA7075; A97075; 7075 | 3.4365; 3.4364 | AlZn5.5MgCu; AlZn5.5MgCu; AlZnMgCu1.5; AlZnMgCu1.5 | 7075; L95; L96 | A-Z5GU | | 9007/2 | L-3710 | A7075 | B95 | AlZn5.5MgCu; AlZn5.5MgCu; AW-7075; 7075 |
| 22 | AA2024; A92024; 2024 | 3.1355; 3.1354 | AlCuMg2 | 2024; 2L97 | A-U4G1 | | 9002/4; 3583 | L-3140 | A2024 | D16 | AlCu4Mg1; 2024 |
| 22 | | 3.4335 | AlZn4.5Mg1; AlZn4.5Mg1 | H17 | A-Z5G | 144425 | 9007/1 | L-3741 | | | AlZn4.5Mg1; AlZn4.5Mg1; 7020 |
| 22 | AA6061; A96061; 6061 | 3.3211; 3.3214 | AlMg1SiCu | H20 | A-GSUC | | 9006/2 | L-3420 | A6061 | AD33 | EN AW-6061; EN AW-AlMg1SiCu; AlMg1SiCu |
| 23 | | 3.3261 | G-AlMg5Si; GK-AlMg5Si; AlMg5Si; VDS 245 | LM5 | | 144163 | | | | AL13 | EN AC-51400; EN AC-AlMg5Si; G-AlMg5Si; AlMg5Si |
| 23 | | 3.2982 | GD-AlSi12(Cu); G-AlSi12(Cu); AlSi12(Cu); VDS 231 D | | A-S12U | | 3048 | | | | EN AC-47100; EN AC-AlSi12C; G-AlSi12Cu; AlSi12Cu; AlSi12Cu1(Fe) |
| 23 | 520.0; AA 520.0; A05200 | | | | A-G10S | | 3056 | L-2310 | AC7B | A18 | |
| 23 | 222.0; AA 222.0; A02220 | | | LM12 | | | 3041 | L-2110 | | | |
| 23 | 518.0; AA 518.0; A05180 | 3.3292 | G-AlMg9; GD-AlMg9; AlMg9; VDS 349 | | | | | | | | EN AC-51200; EN AC-AlMg9; G-AlMg9; AlMg9 |
| 23 | 203.0; AA 203.0; A02030 | 3.1754 | G-AlCu5Ni1.5; G-AlCu5Ni1.5 | | AU5NKZr | | | | | | |
| 23 | ER4047; A94047 | 3.2585 | SG-AlSi12 | 4047A; NG2 | | 144262 | | | | | SG-AlSi12; EL-AlSi12 |
| 23 | 712.0; AA 712.0; A07120 | | G-AlZn10Si8Mg; GK-AlZn10Si8Mg; AlZn10Si8Mg; VDS 108 | | A-Z5GF | | 3602 | | | | EN AC-71100; EN AC-AlZn10Si8Mg; G-AlZn10Si8Mg; AlZn10Si8Mg |

| Material Group No. |  |  |  |  |  |  |  |  |  |  | |
|--------------------|---|---|---|---|---|---|--|---|---|---|--|
| | USA | Germany | | U.K. | France | Sweden | Italy | Spain | Japan | Russia | Euronorm |
| | AISI/SAE/ UNS/ ASTM/AA | Werkstoff | DIN | BS | AFNOR | SS | UNI | UNE | JIS | GOST | EN |
| 23 | 514.0; 514.1; AA 514.0; AA 514.1; A05140; A05141 | 3.3561 | G-AIMg5; GK-AIMg5; AlMg5; EN AC-51300; VDS 244 | | A-G6 | | 3058 | L-2331 | | AL28; AMg5Mz; | EN AC-51300; EN AC-AIMg5; G-AIMg5; AlMg5 |
| 23 | B413.0; AA B413.0; A24130; B213.0; AA 213.0; A22130 | 3.2581; 3.2582 | G-AISI12; GK-AISI12; GD-AISI12; AISI12 | LM6 | A-S13 | 144261 | 4514 | L-2520 | AC3 | | EN AC-44200; EN AC-AISI12; G-AISI12; GD-AISI12; AISI12 |
| 23 | | 3.2211 | G-AISI11; GK-AISI11; AISI11 | | | | | | | | EN AC-44000; EN AC-AISI11; G-AISI11 |
| 23 | A444.0; AA A444.0; A14440 | | | | | | | | | AK7 | |
| 23 | | 3.3541 | G-AIMg3; GK-AIMg3; GF-AIMg3; AlMg3; VDC 244 | H20 | A-G3T | 144224 | 3059 | L-2341 | ADC6 | | EN AC-51100; EN AC-AIMg3; G-AIMg3; AlMg3 |
| 24 | 515.0; AA 515.0; A05150 | 3.3241 | G-AIMg3Si; GK-AIMg3Si; GF-AIMg3Si; AlMg3Si; AlMg3Si1 | | | | | | | | G-AIMg3Si1; AlMg3Si |
| 24 | | 3.2373 | G-AISI9Mg; GK-AISI9Mg; AISI9Mg | | A-S9G | | 3051 | | AC4A | AK9 | G-AISI9Mg; AISI9Mg |
| 24 | A356.0; AA A356.0; A13560; A356.2; AA A356.2; A13562 | 3.2371 | G-AISI7Mg; GK-AISI7Mg; GF-AISI7Mg; AISI7Mg | 2L99 | A-S7G03 | | | L-2651 | AC4CH | AL9 | G-AISI7Mg; AISI7Mg |
| 24 | 204.0; AA 204.0; A02040 | 3.1371 | G-AICu4TiMg; GK-AICu4TiMg; GF-AICu4TiMg; AlCu4TiMg | | AU5GT | | | L-2140 | AC1B | | EN AC-21000; EN AC-AICu4TiMg; G-AICu4TiMg |
| 24 | A333.0; AA A333.0; A13330 | 3.2161 | G-AISI8Cu3; GK-AISI8Cu3 | | | 144163 | | | | AL13 | EN AC-AISI8Cu3; EN AC-AISI8Cu3; G-AISI8Cu3 |
| 24 | 380.0; AA 380.0; A03800 | 3.2163 | G-AISI9Cu3; GD-AISI9Cu3; AISI9Cu3; VDS 226 | LM24 | A-S9U3 | 144252 | 3610 | L-2630 | AC4B | AK8M3; AK8 | EN AC-46200; EN AC-AISI8Cu3; G-AISI9Cu3; AISI8Cu3 |
| 24 | 365.0; AA 365.0; A03650 | | G-AISI10MnMg | | | | | | | | EN AC-43500; EN AC-AISI10MnMg; G-AISI10MnMg |
| 24 | 319.0; AA 319.0; A03190 | 3.2151 | G-AISI6Cu4; GK-AISI6Cu4; AISI6Cu4; VDS 225 | LM21 | A-S5UZ | 144230 | 7369/4 | L-2620 | AC2B | AK5M | EN AC-45000; EN AC-AISI6Cu4; G-AISI6Cu4; AISI6Cu4 |
| 24 | | 3.2383 | G-AISI10MgCu; GK-AISI10MgCu; G-AISI10Mg(Cu); GK-AISI10Mg(Cu); AISI10MgCu; AISI10Mg(Cu) | | A-S10UG | | | | | | |
| 24 | | 3.2381; 3.2385 | G-AISI10Mg; GK-AISI10Mg; GD-AISI10Mg; AISI10Mg; VDS 239 | | A-S10G | 144253 | | | | | EN AC-43000; EN AC-AISI10Mg; G-AISI10Mg; AISI10Mg |
| 24 | | 3.1841 | G-AICu4Ti; AlCu4Ti | | | | | | | AL19 | EN AC-21100; EN AC-AICu4Ti; G-AICu4Ti; AlCu4Ti |

| Material Group No. |  | | | | | | | | | | |
|--------------------|--|--|--|---------|--|---------------------------------|---------------------|--------|---|----------------------------------|---|
| | USA | Germany | | U.K. | France | Sweden | Italy | Spain | Japan | Russia | Euronorm |
| | AISI/SAE/ UNS/ ASTM/AA | Werkstoff | DIN | BS | AFNOR | SS | UNI | UNE | JIS | GOST | EN |
| 25 | 390.0; AA 390.0; A03900 | | G-AlSi17Cu4Mg | LM30 | | 4282 | | | | | EN AB-48100; EN AC-48100; G-AlSi17Cu4Mg; AlSi17Cu4Mg |
| 25 | 393.0; AA 393.0; A03930 | | G-AlSi20CuMgNi; AlSi20CuMgNi | LM29 | | | | | | AK21M2N2 | |
| 25 | | | G-AlSi18Cu1MgNi; AlSi18Cu1MgNi | LM28 | | | | | | | |
| 26 | C36000 | 2.0375 | CuZn36Pb3 | CZ124 | CuZn36Pb3 | | 12167 | | C3600; C3601; C3602 | | CuZn36Pb3; CW603N |
| 26 | C83810 | 2.1098 | CuSn3Zn8Pb5-C; G-CuSn2ZnPb | LG1 | | | | | | | CuSn3Zn8Pb5-C |
| 26 | C83600 | 2.1096; 2.1096.01 | CuSn5Zn5Pb5-C; G-CuSn5ZnPb; Rg 5 | LG2 | CuPb5Sn5Zn5; UE5; U-E 5 Pb 5 Z 5 | 5204-15 | | | H5111; H2203 | BrO5Ts5S5 | CuSn5Zn5Pb5-C |
| 26 | C93200 | 2.1090 | CuSn7Zn4Pb7-C; G-CuSn7ZnPb; GC-CuSn7ZnPb; GZ-CuSn7ZnPb; Rg 7 | GC 493K | CuSn7Pb6Zn4; UE7; U-E 7 Z 5 Pb 4 | | | | | | CuSn7Zn4Pb7-C |
| 26 | C93800 | 2.1182 | CuSn7Pb15-C; G-CuPb15Sn; GC-CuPb15Sn; GZ-CuPb15Sn | LB1 | U-Pb15E8; U-Pb 15 E8 | | | C-3300 | | | CuSn7Pb15-C; CC496K |
| 26 | C93700 | 2.1176 | CuSn10Pb10-C; G-CuPb10Sn; GC-CuPb10Sn; GZ-CuPb10Sn | LB2 | U-Pb10 | | | | | | CuSn10Pb10-C |
| 27 | C22000 | 2.0230 | CuZn10; Ms90 | CZ101 | U-Z10; CuZn10 | | P-CuZn10; P-OT90 | | C2200 | L90 | CuZn10; CW501L |
| 27 | C86200; SAE 430A | 2.0596 | CuZn34Mn3Al2Fe1-C; G-CuZn34Al2; GK-CuZn34Al2; GZ-CuZn34Al2 | HTB 1 | U-Z36N3; CuZn19Al6Y20 | | | | HBSC4; H5102/class 3; H5102/class 4 | LTs23A; LTs23A6Zn3MTs2 | CuZn34Mn3Al2 Fe1-C; CC764S |
| 27 | C27200 | 2.0335 | CuZn36; Ms64 | CZ108 | U-Z36; CuZn 36 | | C 2700 | | | L63 | CuZn36; CW507L |
| 27 | C27400 | 2.0321 | CuZn37; Ms63 | CZ108 | | | P-CuZn37; P-OT63 | | C2720 | L63 | CuZn37; CW508L |
| 27 | C86400 | 2.0592 | CuZn35Mn2Al1Fe1-C; G-CuZn35Al1; GK-CuZn35Al1; GZ-CuZn35Al1; G-Ms60 | HTB 1 | | | | | HBSC1; CAC301 | | CuZn35Mn2Al1 Fe1-C; CC765S |
| 27 | C46400 | 2.0530 | CuZn38Sn1As; CuZn38Sn1 | CZ112 | | | P-CuZn39Sn1 | | C4640 | LO60-1 | CuZn38Sn1As; CW717R |
| 27 | C23000; 85Cu-15Zn | 2.0240 | CuZn15; CuZn 15 | CZ102 | U-Z15; CuZn15 | 5112-02; 5112-04; 5112-05 | | | C2300 | | CuZn15; CW502L |
| 27 | C24000; 80Cu-20Zn | 2.0250 | CuZn20; CuZn 20; Ms80 | CZ103 | CuZn20 | 5114-02; 5114-04; 5114-05 | | | C2400 | | CuZn20; CW503L |
| 27 | C26000; CA260 | 2.0265 | CuZn30; CuZn 30 | CZ106 | CuZn30 | | | | C2600 | | CuZn30; CW505L |
| 28 | C63000 | 2.0966 | CuAl10Ni5Fe4; CuAl 10 Ni 5 Fe 4 | CA 104 | U-A10N; CuAl9Ni5Fe3 | | P-CuAl10Ni5Fe5 | | C6301 | BrAD; BrAZn10-4-4; N10-4-4 | CuAl10Ni5Fe4; CW307G |
| 28 | C90700 | 2.1050 | CuSn10-C; G-CuSn 10; SnBz10 | CT1 | CuSn8 | | | | | | CuSn10-C; CC480K |
| 28 | C90800; C91700 | 2.1052; 2.1052.01; 2.1052.04; 2.1052.03 | CuSn12-C; G-CuSn12; GZ-CuSn12; SnBz12, Gbz12 | PB2 | UE12P | | | | CAC502C; PBC2C | | CuSn12-C; CC483K |
| 28 | C95800; C95810 | 2.0975 | G-CuAl10Fe5Ni5-C; G-CuAl 10 Ni; NiAlBz-F60 | | CuAl10Fe5Ni5 Y70 | | | | CAC703C | | CC333G |

| Material Group No. |  |  |  |  |  |  |  |  |  |  | |
|--------------------|---|---|---|---|---|---|--|---|---|---|---|
| | USA | Germany | | U.K. | France | Sweden | Italy | Spain | Japan | Russia | Euronorm |
| | AISI/SAE/ UNS/ ASTM/AA | Werkstoff | DIN | BS | AFNOR | SS | UNI | UNE | JIS | GOST | EN |
| 28 | C11000 | 2.0060 | Cu-ETP; E-Cu57; E Cu 57 | C101 | Cu-B | | Cu-DHP | C11020 | C1100 | M1 | Cu-ETP; E-Cu57; CW004A |
| 28 | C81500 | 2.1292 | G-CuCrF 35 | CC1-FF | U-Cr0.8Zr | | | | | | |
| 28 | C10300 | 2.0070 | Cu-HCP; Cu-PHC; SE-Cu | | | | | C103 | | LS60-2 | Cu-HCP; CW020A; Cu-PHC; CW021A |
| 28 | C10100; C10200 | 2.0040 | Cu-OF; OF-Cu | C103; C110 | C-c1; Cu-c2 | | | C-1120 | C1011; C1020 | M0b | Cu-OF; CW008A |
| 28 | C86550 | 2.0590 | G-CuZn40Fe; G-SoMsF30 | | | | | | | | G-CuZn40Fe |
| 28 | C18100; C18150 | 2.1293 | CuCr1Zr; CuCrZr | CC102 | U-C1Z; U-Cr0.8Zr | | | | | | CuCr1Zr; CW106C |
| 28 | C11000; C12200 | 2.0090 | Cu-DHP; E-Cu58; E Cu 58 SF-Cu | C106 | Cu-B | | | | C1100; C1220 | M1f | Cu-DHP; E-Cu58; CW024A |
| 28 | C95500 | 2.0971 | CuAl9Ni3Fe2 | | UA9 | | | | | BrA10Zn4N4L | |
| 28 | C61000 | 2.0920 | CuAl8; Cu Al 8 | | CuAl8 | | | | | BrA7 | CuAl8 |
| 29 | | | | | | | | | | | |
| 29 | | | | | | | | | | | |
| 30 | | | | | | | | | | | |
| 30 | | | | | | | | | | | |

Index

| | | |
|----------|-------------------------|---------|
| A | AOGT | 111 |
| | A/S-SVLBCR/L | 50 |
| | A/S-SVLFCR/L; A-SVUCR/L | 49 |
| | A/S-SVQCR/L | 49 |
| | A-SVQNR/L-AL-JHP | 53 |
| C | CCGT-AF | 18 |
| | CCGT-AF | 140 |
| | CCGT-AS | 17, 140 |
| | CCMT-14 | 17, 139 |
| | CCMT/CCGT | 18, 139 |
| | CCMT/CCGT-SM | 18, 139 |
| | CCMT (PCD) | 29, 140 |
| | CNGG-F3N | 8 |
| | CNGX-M3N | 8 |
| | CNMA (PCD) | 29 |
| | CNMG/CNGG-PP | 7 |
| | CNMG/CNGG-TF | 7 |
| | CNMG-GN | 7 |
| | CNMS-12 | 8 |
| | CXGG-M3N-P | 17 |
| D | DCGT-AF | 19 |
| | DCGT-AS | 19 |
| | DCMT-14 | 19 |
| | DCMT (PCD) | 29 |
| | DNGG-M3N | 11 |
| | DNMG/DNGG-PP | 11 |
| | DNMG/DNGG-TF | 10 |
| | DNMS-12 | 11 |
| | DTF50 FSHDR-8 | 45 |
| | DTF50 FSHIUR | 46 |
| | DTF50 SVXCR-16X2 | 47 |
| | DTF50 SVXCR-22 | 46 |
| E | EBA-B2 | 102 |

| | | |
|----------|--------------------------------|---------|
| | ECA-B-2 | 101 |
| | ECA-B-3 | 101 |
| | ECA-F-2 | 102 |
| | ECA-H3-CF | 96-98 |
| | ECA-H4-CF | 98 |
| | ECAP-H3-CF | 99 |
| | ECR-B3-R | 99 |
| | ECR-B3-R-C | 100 |
| | ERC-E-3 | 100 |
| F | FFQ4 SOMT 1205 | 90 |
| | FGHDUR | 45 |
| | FGPAM | 45 |
| | FSHDR | 44 |
| | FSHIUR | 43 |
| | FSPA/FSMA | 44 |
| G | GDMA | 35, 43 |
| | GHDKR/L | 40 |
| | GHDR/L-8A | 39 |
| | GHIFR/L-A | 39 |
| | GHIUR/L-C-22.5A-8V | 38 |
| | GHIUR/L-C-A (15° & 27.5°) Bars | 38 |
| | GHIUR/L-UC | 39 |
| | GHVR/L | 40 |
| | GIPA 8-35V (V-shape) | 42 |
| | GIPA (full radius W=3-6) | 34, 41 |
| | GIPA/GIDA 8 (full radius) | 35, 42 |
| | GIPA (W=3-6) | 34 |
| | GRIPA | 33 |
| | GRIPA (full radius) | 33 |
| H | HM90 APCR 1605..R-P | 83 |
| | HM90 APCR 2206..R-P | 84 |
| | HM90 AXCR 1505 | 82 |
| | HM390 TDCR 1505 | 84 |
| | HSM90S APCR 1405 | 81 |
| | HSM90S APCR 2207 | 81 |
| | HTP LN.. 0604 | 91 |
| | HTP LN.. 1006 | 90, 142 |
| | HTP LN.. 1606 | 91 |


| | | |
|----------|--------------------------|----------|
| I | ICN | 106 |
| | IQ845 SYHU-07 | 87 |
| K | KNUX | 12 |
| L | LNAR 1106 | 85 |
| | LNAR 1106 (PCD) | 86 |
| | LNAR 1106PN-R-S-W (PCD) | 86 |
| | LNAR 1506 | 87 |
| | LNAR 1506 PN-R-S (PCD) | 87 |
| M | MM EA | 93 |
| | MM EA-CF | 93 |
| | MM EBA | 94 |
| | MM ERA | 94 |
| | MPD | 119 |
| O | OECR | 89 |
| | OEMT/OEKT 060405 | 88 |
| | OFCR/OFCT-AEN/AETN | 88 |
| | OFCR/OFCT-RW/AER (wiper) | 88 |
| P | P290 ACCT/KT | 89 |
| | P290 ACKT | 90 |
| R | RCGT-AS | 23 |
| | RCMT-14 | 23 |
| | RCMT-FW | 89 |
| | RM-BN-H7LB | 130 |
| | RM-BN-H7SA | 131 |
| | RM-FCR-H7N-CS-C | 126 |
| | RM-FCR-H7S-CS-C | 127 |
| | RM-SEI-B | 120 |
| | RM SETTING DEVICE | 120 |
| | RMSP-B | 138 |
| | RMSP-T | 138 |
| S | SCGT-AS | 21, 141 |
| | SCMT-19 | 141 |
| | SCMW | 21 |
| | SEHFD | 104 |
| | SNMA | 16 |
| | SNMG-GN | 16 |
| | SNMG-TF | 16 |
| | SOGX/T-AL | 111, 142 |

| | | |
|----------|----------------|---------|
| | SOMT | 118 |
| | SOMX | 118 |
| | SVHNR/L-AL-JHP | 52 |
| | SVJCR/L | 48 |
| | SVJCR/L-16-JHP | 48 |
| | SVVCN | 48 |
| | SVVNN-AL-JHP | 52 |
| | SVXCR/L | 49 |
| T | T490 LNAR-P | 85 |
| | TCGT-AS | 22 |
| | TCMT-14 | 22 |
| | TCMT-19 | 22 |
| | TCMT (PCD) | 30 |
| | TNGG-M3N | 15 |
| | TNMA | 15 |
| | TNMG-GN | 14 |
| | TNMG-TF | 14 |
| | TNMG/TNGG-PP | 14 |
| | TNMS-12 | 15 |
| | TPGB | 23 |
| | TPGB-XL | 25 |
| | TPGH-R/L | 24 |
| | TPGH-XL | 25 |
| | TPG MF (HSS) | 60 |
| | TPG M (HSS) | 59 |
| | TPG UNC (HSS) | 61 |
| | TPG UNF (HSS) | 61 |
| | TPGX | 24, 141 |
| | TPGX (PCD) | 30, 142 |
| | TPMT | 24 |
| | TPS MF (HSS) | 63 |
| | TPS M (HSS) | 62 |
| | TPS UNC (HSS) | 64 |
| | TPS UNF (HSS) | 64 |
| V | VCGT-AF | 20, 51 |
| | VCGT-AS | 20, 50 |
| | VCGT-DW (PCD) | 30, 51 |
| | VCGT (PCD) | 30, 51 |

| | | |
|----------|-----------------|--------|
| V | VCMT-14 | 20 |
| | VCMW | 21 |
| | VDI-DTF50 | 47 |
| | VDI-DTF50E-L60R | 47 |
| | VNGG-M3N | 12 |
| | VNGU-R3N | 13, 53 |
| | VNMG/VNGG-NF | 13 |
| | VNMM-PP | 12 |
| | VNMS-12 | 13 |
| W | WNGG-F3N | 9 |
| | WNMG-GN | 9 |
| | WNMG-NF | 10 |
| | WNMG-PP | 10 |
| | WNMG-TF | 9 |
| | WPEX | 25 |

ISCAR TOOLS FOR MACHINING **ALUMINUM**

Metric Catalog

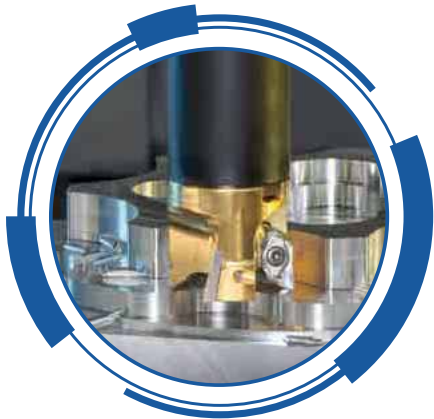

Download **ISCAR WORLD APP**



E-CAT



Erich Klingseisen KG Brunnenstraße 2 78554 Aldingen

Tel. (07424) 98192-0
info@klingseisen.de

Fax. (07424) 84601
www.klingseisen.de

