

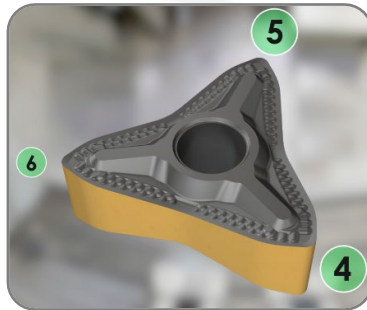



QUICKTURN

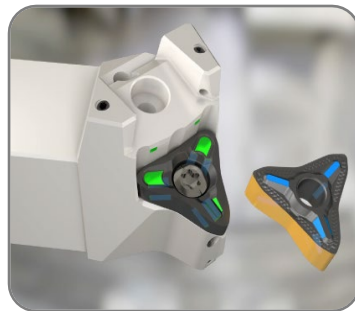

- ✓ 6 effektive Schneiden
- ✓ Hochvorschub-Geometrie
- ✓ Spanformer für ISO M- und ISO P-Werkstoffe





- ✓ Stabiler Plattensitz
- ✓ Zielgerichtete Kühlung



QUICKTURN

NEU innovative Wendschneidplatte mit 6 effektiven Schneiden für Multi-Funktionale-Anwendungen



Flexibel einsetzbar
Hochvorschub-Bearbeitungen
Stabiler Plattensitz



LOGIQUICK
MACHINING INTELLIGENTLY


SCAN ME



Ihr Nutzen bei Multi-Funktions-Drehanwendungen:


- ✓ Einsparung von Dreh-Werkzeugen
- ✓ Hohes Zeitspanvolumen durch Hochvorschub-Drehen
- ✓ Hohe Oberflächenqualitäten und Standzeiten
- ✓ Preis pro Schneide (6-effective Schneiden)

QUICKTURN

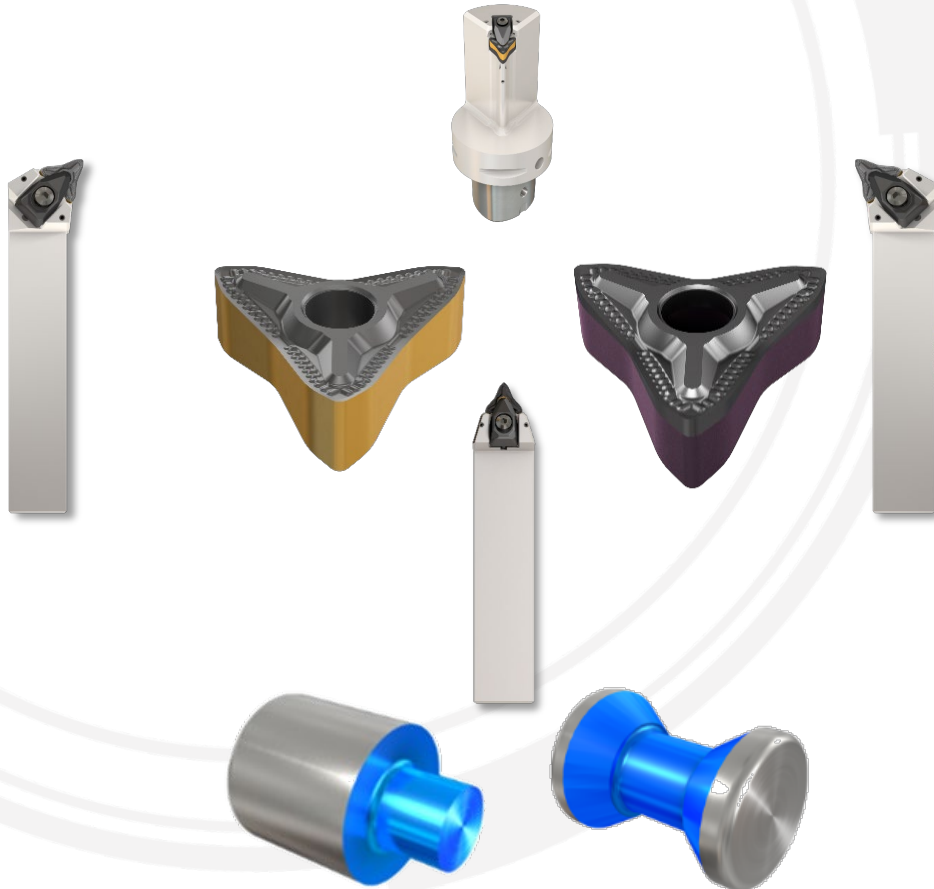

QUICKTURN


Q6-MNMG-M3P-SL
High feed insert with six reinforced cutting edges and negative flank for roughing applications.

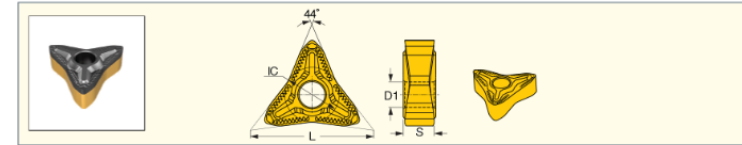

Designation	Dimensions				Tough → Hard		Recommended	Machining Data
	L	IC	S	RE	IC8025	IC8150	a_p (mm)	f (mm/rev)
Q6-MNMG120608-M3P-SL	25.10	11.05	6.30	0.80	•	•	0.50-3.50	0.20-1.20

QUICKTURN


Q6-MNMG-M3M-SL
High feed insert with six reinforced cutting edges and negative flank for roughing applications.

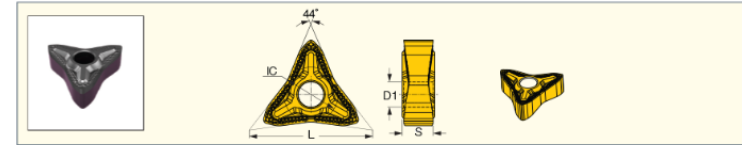

Designation	Dimensions				Tough → Hard		Recommended	Machining Data
	L	IC	S	RE	IC6025	IC6015	a_p (mm)	f (mm/rev)
Q6-MNMG120608-M3M-SL	25.10	11.05	6.30	0.80	•	•	0.50-3.50	0.20-1.20

QUICKTURN


Q6-DMXNR/L-SL-JHP
Safety lock tools with high feed negative inserts for roughing applications.

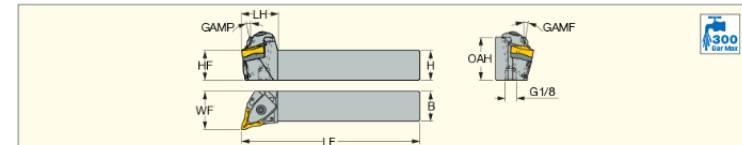

Designation	H	OAH	HF	B	LF	LH	WF	GAMP	GAMF	MIID	KAPR ¹⁾	KAPR_2	KAPR_3
Q6-DMXNR/L 2525M-12-SL-JHP	25.0	36.00	25.0	25.0	150.00	31.0	32.00	10.0	10.0	Q6-MNMG120608-M3P-SL	91.5	113.0	23.0
Q6-DMXNR/L 3232P-12-SL-JHP	32.0	32.00	32.0	32.0	170.00	31.0	39.00	10.0	10.0	Q6-MNMG120608-M3P-SL	91.5	113.0	23.0

QUICKTURN


Q6-DMXNN-SL-JHP
Safety lock tools with high feed negative inserts for roughing applications.

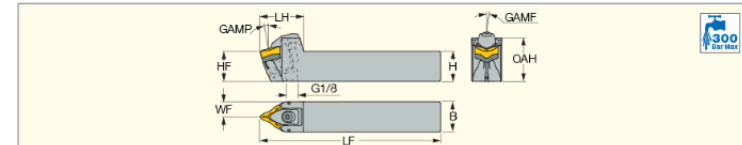

Designation	H	OAH	HF	B	LF	LH	WF	GAMP	GAMF	MIID	KAPR ¹⁾	KAPR_2
Q6-DMXNN 2525M-12-SL-JHP	25.0	36.00	25.0	25.0	150.00	37.0	12.50	14.0	0.0	Q6-MNMG1206-M3P-SL	46.5	68.0
Q6-DMXNN 3232P-12-SL-JHP	32.0	43.00	32.0	32.0	170.00	37.0	16.00	14.0	0.0	Q6-MNMG1206-M3P-SL	46.5	68.0

QUICKTURN

C#-Q6-DMXNN-SL-Y
Y-Axis Turning Tools with a Safety Lock clamping mechanism for negative inserts, intended for roughing and medium app.

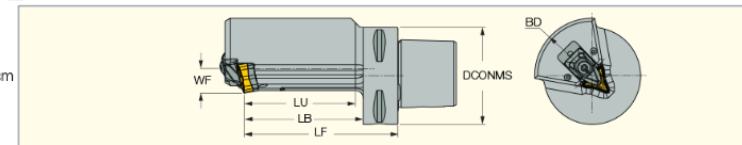

Designation	BD	LF	LB	LU	WF	DCONMS	MIID
C4 Q6-DMXNN-12-SL-H065-Y	60.00	65.00	44.40	39.40	11.20	40.00	Q6-MNMG 1206
C5 Q6-DMXNN-12-SL-H080-Y	75.00	80.00	59.40	54.40	11.20	50.00	Q6-MNMG 1206
C6 Q6-DMXNN-12-SL-H100-Y	75.00	100.00	77.40	72.40	11.20	63.00	Q6-MNMG 1206
C8 Q6-DMXNN-12-SL-H100-Y	80.00	100.00	70.00	65.00	11.20	80.00	Q6-MNMG 1206